



INSTYTUT TECHNIKI BUDOWLANEJ



Member of



www.eota.eu

European Technical Assessment

**ETA-23/0651
of 23/09/2025**



General Part

Technical Assessment Body issuing the European Technical Assessment

Instytut Techniki Budowlanej

Trade name of the construction product

Eurofast Flat Roof Fasteners

Product family to which the construction product belongs

Fasteners for flexible roof waterproofing systems

Manufacturer

Van Roij Fasteners Europe B.V.
(EUROFAST / EUROFAST GROUP)
Indumastraat 18
5753 RJ Deurne
Netherlands

Manufacturing plants

Van Roij Fasteners Europe B.V. plants

This European Technical Assessment contains

338 pages including 22 Annexes which form an integral part of this Assessment

This European Technical Assessment is issued in accordance with regulation (EU) No 305/2011, on the basis of

European Assessment Document (EAD)
030351-00-0402 "Systems of mechanically fastened flexible roof waterproofing sheets"

This version replaces

ETA-23/0651 issued on 26/09/2023

This European Technical Assessment is issued by the Technical Assessment Body in its official language. Translations of this European Technical Assessment in other languages shall fully correspond to the original issued document and shall be identified as such.

Communication of this European Technical Assessment, including transmission by electronic means, shall be in full. However, partial reproduction may only be made with the written consent of the issuing Technical Assessment Body. Any partial reproduction has to be identified as such.

Specific Part

1 Technical description of the product

Eurofast Flat Roof Fasteners are mechanical fasteners consist of screw, washer, washer with integral sleeve or linear washer. Screws are made of stainless steel or carbon steel protected by ceramic coating Eurofast Coat 15C or Eurofast Coat 30C. Washers (metal pressure plates) and linear washers (termination bars) are made of carbon steel protected by Aluzinc coating. Washers with integrated sleeve (pressure plates with tube) are made of plastic material: polyamide (PA) or polypropylene (PP) with addition of polyethylene (PE).

Eurofast Flat Roof Fasteners are shown in the Annexes to this European Technical Assessment.

The material properties, dimensions and tolerances not indicated in the Annexes shall correspond to the information laid down in the technical documentation to this European Technical Assessment.

2 Specification of the intended use in accordance with the applicable European Assessment Document (EAD)

Eurofast Flat Roof Fasteners are intended to be used for flexible roof waterproofing systems according to EAD 030351-00-0402. The possible substrates are steel or aluminum sheets, concrete, autoclaved aerated concrete, OSB/3 sheets, chipboards, plywood, wood wool panels and timber.

The performance given in Section 3 is only valid if the fasteners are used in compliance with the specifications and conditions given in the Annexes.

The provisions made in this European Technical Assessment are based on an assumed working life of the fasteners of 10 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer or Technical Assessment Body, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

Systems of mechanically fastened flexible roof waterproofing membrane according to EAD 030351-00-0402 should be covered by a separate ETA.

3 Performance of the product and references to the methods used for its assessment

3.1 Performance of the product

3.1.1 Safety and accessibility in use (BWR 4)

3.1.1.1 Fastener axial loads

Fastener axial loads are given in Annex A.1, A.2, B.1, B.2, C.1, C.2, D.1, D.2, E.1, E.2, F.1, G.1, G.2, H.1, H.2, I.1, I.2, J.1, J.2, K.1, K.2, L.1, L.2, M.1, N.1, N.2, O.1, O.2, P.1, R.1, S.1, T.1, U.1 and W.1.

3.1.1.2 Resistance to fastener unwinding

The fasteners are considered to be safe against unwinding. This was evaluated on the basis of the existing field experience of the manufacturer.

3.1.1.3 Mechanical resistance / brittleness of plastic elements

Plastic elements of fasteners are resistant to impact and brittleness, after impact of weight from drop height $\geq 1,0$ m.

3.1.1.4 Resistance to corrosion of metallic elements

All elements made of coated carbon steel, subjected to 15 cycles of action of a humid atmosphere containing 2,0 l SO₂ do not show more than 15% surface corrosion.

3.1.1.5 Mechanical resistance after heat ageing of plastic fasteners

Plastic elements, after heat ageing, are resistant to impact and brittleness, after impact of weight from drop height $\geq 1,0$ m.

3.2 Methods used for the assessment

The assessment has been made in accordance with EAD 030351-00-0402.

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base

According to Decision 98/143/EC of the European Commission the system 2+ of assessment and verification of constancy of performance applies (see Annex V to regulation (EU) No 305/2011).

5 Technical details necessary for the implementation of the AVCP system, as provided in the applicable European Assessment Document (EAD)

Technical details necessary for the implementation of the AVCP system are laid down in the control plan deposited in Instytut Techniki Budowlanej.

For type testing the results of the tests performed as part of the assessment for the European Technical Assessment shall be used unless there are changes in the production line or plant. In such cases the necessary type testing has to be agreed between Instytut Techniki Budowlanej and the notified body.

Issued in Warsaw on 23/09/2025 by Instytut Techniki Budowlanej



Anna Panek, MSc
Deputy Director of ITB

Screw / Fastener			Figure Annex	Characteristic loads Annex	Parameters Annex	Assemblies Annex
Product key	Alternative product keys					
EDS-S-48xLL	ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M	ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	A.1 (p. 8)	A.1 and A.2 (p. 8, 9)	A.3 (p. 10)	A.4 to A.28
EDS-B-48xLL	ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M	ERSS-48xLL-2-PH2-15C or ERSS-48xLL-2-PH2-M	B.1 (p. 36)	B.1 and B.2 (p. 36, 37)	B.3 (p. 38)	B.4 to B.28
EDS-B-58xLL	ERSS-58xLL-2-T25-30C	-	C.1 (p. 64)	C.1 and C.2 (p. 64, 65)	C.3 (p. 66)	C.4 to C.22
EDS-SRB-48xLL	ERSS-48xLL-2-T25-B	ERSS-48xLL-2-PH2-B	D.1 (p. 86)	D.1 and D.2 (p. 86, 87)	D.3 (p. 88)	D.4 to D.28
EFXHD-67xLL	ERSS-67xLL-2-T25-M	-	E.1 (p. 114)	E.1 and E.2 (p. 114, 115)	E.2 (p. 115)	E.3 to E.19
DFHD-67xLL	ERSS-67xLL-2-PH3-15C	-	F.1 (p. 133)	F.1 (p. 133)	F.2 (p. 134)	F.3 to F.9
EDS-BZT-48xLL / EDS-BGT-48xLL	ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M / ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C	-	G.1 (p. 142)	G.1 and G.2 (p. 142, 143)	G.3 (p. 144)	G.4 to G.14
EDS-BZTHD-48xLL / EDS-BGTHD-48xLL	ERSS-48xLL-3-HWH-15C / ERSS-48xLL-3-HWH-15C-C	-	H.1 (p. 156)	H.1 and H.2 (p. 156, 157)	H.2 (p. 157)	H.3 to H.13
EDS-BZTR-48xLL / EDS-BGTR-48xLL	ERSS-48xLL-2-HWH-B / ERSS-48xLL-2-HWH-B-C	-	I.1 (p. 169)	I.1 and I.2 (p. 169, 170)	I.3 (p. 171)	I.4 to I.14
EDS-H-50xLL	ERWS-50xLL-0-PH2-15C	ERWS-50xLL-0-T25-15C	J.1 (p. 183)	J.1 and J.2 (p. 183, 184)	J.3 (p. 185)	J.4 to J.30
GBS-60xLL	ERAS-60xLL-0-T25-15C	-	K.1 (p. 213)	K.1 and K.2 (p. 213, 214)	K.3 (p. 215)	K.4 to K.22
GBSA2-60xLL	ERAS-60xLL-0-T25-S	-	L.1 (p. 235)	L.1 and L.2 (p. 235, 236)	L.3 (p. 237)	L.4 to L.22
GBS-80xLL	ERAS-80xLL-0-T25-15C	-	M.1 (p. 257)	M.1 (p. 257)	M.2 (p. 258)	M.3 to M.10
EFHD-63xLL	ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M	-	N.1 (p. 267)	N.1 and N.2 (p. 267, 268)	N.3 (p. 269)	N.4 to N.22
EFR-65xLL	ERCS-65xLL-0-T25-15C	-	O.1 (p. 289)	O.1 and O.2 (p. 289, 290)	O.3 (p. 291)	O.4 to O.22
DFCF-63xLL	ERCS-63xLL-0-HWH-15C	-	P.1 (p. 311)	P.1 (p. 311)	P.2 (p. 312)	P.3 to P.8
DFCF-63xLL-S	ERCS-63xLL-0-FH-15C / ERCS-63xLL-0-FH-30C	-	R.1 (p. 319)	R.1 (p. 319)	R.2 (p. 320)	R.3 to R.4
EAS-65xLL	ERCS-65xLL-0-T25-15C-EAS	-	S.1 (p. 323)	S.1 (p. 323)	S.2 (p. 324)	S.3 to S.10
ISPC-50xLL	ECT-50xLL-PA	-	T.1 (p. 333)	T.1 (p. 333)	T.1 (p. 333)	T.2
ISPCA2-50xLL	ECT-S-50xLL-PA	-	U.1 (p. 335)	U.1 (p. 335)	U.1 (p. 335)	U.2
DL-18xLL	EDL-18xLL-PA	-	W.1 (p. 337)	W.1 (p. 337)	W.1 (p. 337)	W.2
Eurofast Flat Roof Fasteners				Annex Info.1 of European Technical Assessment ETA-23/0651		
Screws / Fasteners						

Screw / Fastener			Substrates					
Product key	Alternative product keys		Steel sheet	Aluminium sheet	Concrete	Autoclaved aerated concrete	OSB/3 Chipboard Plywood Timber	Wood wool panel
EDS-S-48xLL	ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M	ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	X	–	–	–	X	–
EDS-B-48xLL	ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M	ERSS-48xLL-2-PH2-15C or ERSS-48xLL-2-PH2-M	X	–	–	–	X	–
EDS-B-58xLL	ERSS-58xLL-2-T25-30C		X	–	–	–	X	–
EDS-SRB-48xLL	ERSS-48xLL-2-T25-B	ERSS-48xLL-2-PH2-B	X	X	–	–	X	–
EFXHD-67xLL	ERSS-67xLL-2-T25-M	-	X	–	–	–	X	–
DFHD-67xLL	ERSS-67xLL-2-PH3-15C	-	X	–	–	–	X	–
EDS-BZT-48xLL / EDS-BGT-48xLL	ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M / ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C	-	X	–	–	–	X	–
EDS-BZTHD-48xLL / EDS-BGTHD-48xLL	ERSS-48xLL-3-HWH-15C / ERSS-48xLL-3-HWH-15C-C	-	X	–	–	–	–	–
EDS-BZTR-48xLL / EDS-BGTR-48xLL	ERSS-48xLL-2-HWH-B / ERSS-48xLL-2-HWH-B-C	-	X	X	–	–	X	–
EDS-H-50xLL	ERWS-50xLL-0-PH2-15C	ERWS-50xLL-0-T25-15C	–	–	–	–	X	–
GBS-60xLL	ERAS-60xLL-0-T25-15C	-	–	–	X	X	X	–
GBSA2-60xLL	ERAS-60xLL-0-T25-S	-	–	–	–	X	X	–
GBS-80xLL	ERAS-80xLL-0-T25-15C	-	–	–	X	X	–	–
EFHD-63xLL	ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M	-	–	–	X	–	–	–
EFR-65xLL	ERCS-65xLL-0-T25-15C	-	–	–	X	–	–	–
DFCF-63xLL	ERCS-63xLL-0-HWH-15C	-	–	–	X	–	–	–
DFCF-63xLL-S	ERCS-63xLL-0-FH-15C / ERCS-63xLL-0-FH-30C	-	–	–	X	–	–	–
EAS-65xLL	ERCS-65xLL-0-T25-15C-EAS	-	–	–	X	–	–	–
ISPC-50xLL	ECT-50xLL-PA	-	–	–	X	–	–	–
ISPCA2-50xLL	ECT-S-50xLL-PA	-	–	–	X	–	–	–
DL-18xLL	EDL-18xLL-PA	-	–	–	–	–	–	X

Eurofast Flat Roof Fasteners

Substrates

Annex Info.2

of European
Technical Assessment
ETA-23/0651

Product keys for metal pressure plates and pressure plates tube supplied as pre-assembled combinations with various screws									
Product key					Alternative product keys				
Metal pressure plates or pressure plates with tube		Screw		Pre-assembled combination	Metal pressure plates or pressure plates with tube		Screw		Pre-assembled combinations
TRP-45xLL	+	EDS-S-48xLL	=	TRPS-45	EPT-45xLL-PA	+	ERSS-48xLL-0-PH2-15C	=	EPTSS-XXX-0-45-48-PA
TRP-45xLL	+	EDS-B-48xLL	=	TRPB-45	EPT-45xLL-PA	+	ERSS-48xLL-2-T25-15C	=	EPTSS-XXX-2-45-48-PA
TRP-45xLL	+	EDS-SRB-48xLL	=	TRPSRB-45	EPT-45xLL-PA	+	ERSS-48xLL-2-T25-B	=	EPTSS-XXX-2B-45-48-PA
TRP-45xLL	+	EDS-H-50xLL	=	TRPH-45	EPT-45xLL-PA	+	ERWS-50xLL-0-PH2-15C	=	EPTWS-XXX-0-45-50-PA
TRP-45xLL	+	EAS-65xLL	=	TRPEAS-45	EPT-45xLL-PA	+	ERCS-65xLL-0-T25-15C-EAS	=	EPTCS-XXX-YYY-EAS-0-45-65-PA
BTRP-45xLL	+	EDS-S-48xLL	=	BTRPS-45	EPT-B-45xLL-PA	+	ERSS-48xLL-0-PH2-15C	=	EPTSS-XXX-0-45B-48-PA
BTRP-45xLL	+	EDS-B-48xLL	=	BTRPB-45	EPT-B-45xLL-PA	+	ERSS-48xLL-2-T25-15C	=	EPTSS-XXX-2-45B-48-PA
BTRP-45xLL	+	EDS-SRB-48xLL	=	BTRPSRB-45	EPT-B-45xLL-PA	+	ERSS-48xLL-2-T25-B	=	EPTSS-XXX-2B-45B-48-PA
BTRP-45xLL	+	EDS-H-50xLL	=	BTRPH-45	EPT-B-45xLL-PA	+	ERWS-50xLL-0-PH2-15C	=	EPTWS-XXX-0-45B-50-PA
BTRP-45xLL	+	EAS-65xLL	=	BTRPEAS-45	EPT-B-45xLL-PA	+	ERCS-65xLL-0-T25-15C-EAS	=	EPTCS-XXX-YYY-EAS-0-45B-65-PA
TWP-8040xLL	+	EDS-S-48xLL	=	TWPS-8040	EPT-8040xLL-PA	+	ERSS-48xLL-0-PH2-15C	=	EPTSS-XXX-0-8040-48-PA
TWP-8040xLL	+	EDS-B-48xLL	=	TWPB-8040	EPT-8040xLL-PA	+	ERSS-48xLL-2-T25-15C	=	EPTSS-XXX-2-8040-48-PA
TWP-8040xLL	+	EDS-H-50xLL	=	TWPH-8040	EPT-8040xLL-PA	+	ERWS-50xLL-0-PH2-15C	=	EPTWS-XXX-0-8040-50-PA
TLK-45xLL	+	EDS-S-48xLL	=	TLKS-45	EPT-45xLL-PP	+	ERSS-48xLL-0-PH2-15C	=	EPTSS-XXX-0-45-48-PP
TLK-45xLL	+	EDS-B-48xLL	=	TLKB-45	EPT-45xLL-PP	+	ERSS-48xLL-2-T25-15C	=	EPTSS-XXX-2-45-48-PP
TLK-45xLL	+	EDS-SRB-48xLL	=	TLKSRB-45	EPT-45xLL-PP	+	ERSS-48xLL-2-T25-B	=	EPTSS-XXX-2B-45-48-PP
TLK-45xLL	+	EDS-H-50xLL	=	TLKH-45	EPT-45xLL-PP	+	ERWS-50xLL-0-PH2-15C	=	EPTWS-XXX-0-45-50-PP
TLK-45xLL	+	GBS-60xLL	=	TLKGBS-45	EPT-45xLL-PP	+	ERAS-60xLL-0-T25-15C	=	EPTAS-XXX-0-45-60-PP
TLK-45xLL	+	GBSA2-60xLL	=	TLKGBSA2-45	EPT-45xLL-PP	+	ERAS-60xLL-0-T25-S	=	EPTAS-XXX-0S-45-60-PP
TLK-45xLL	+	EFHD-63xLL	=	TLKEFHD-45	EPT-45xLL-PP	+	ERCS-63xLL-0-T25-15C	=	EPTCS-XXX-0-45-63-PP
TLK-45xLL	+	EFR-65xLL	=	TLKEFR-45	EPT-45xLL-PP	+	ERCS-65xLL-0-T25-15C	=	EPTCS-XXX-0HL-45-65-PP
TLK-45xLL	+	EAS-65xLL	=	TLKEAS-45	EPT-45xLL-PP	+	ERCS-65xLL-0-T25-15C-EAS	=	EPTCS-XXX-YYY-EAS-0-45-65-PP
TLK-75xLL	+	EDS-S-48xLL	=	TLKS-75	EPT-75xLL-PP	+	ERSS-48xLL-0-PH2-15C	=	EPTSS-XXX-0-75-48-PP
TLK-75xLL	+	EDS-B-48xLL	=	TLKB-75	EPT-75xLL-PP	+	ERSS-48xLL-2-T25-15C	=	EPTSS-XXX-2-75-48-PP
TLK-75xLL	+	EDS-SRB-48xLL	=	TLKSRB-75	EPT-75xLL-PP	+	ERSS-48xLL-2-T25-B	=	EPTSS-XXX-2B-75-48-PP
TLK-75xLL	+	EDS-H-50xLL	=	TLKH-75	EPT-75xLL-PP	+	ERWS-50xLL-0-PH2-15C	=	EPTWS-XXX-0-75-50-PP
TLK-75xLL	+	GBS-60xLL	=	TLKGBS-75	EPT-75xLL-PP	+	ERAS-60xLL-0-T25-15C	=	EPTAS-XXX-0-75-60-PP
TLK-75xLL	+	GBSA2-60xLL	=	TLKGBSA2-75	EPT-75xLL-PP	+	ERAS-60xLL-0-T25-S	=	EPTAS-XXX-0S-75-60-PP
TLK-75xLL	+	EFHD-63xLL	=	TLKEFHD-75	EPT-75xLL-PP	+	ERCS-63xLL-0-T25-15C	=	EPTCS-XXX-0-75-63-PP
TLK-75xLL	+	EFR-65xLL	=	TLKEFR-75	EPT-75xLL-PP	+	ERCS-65xLL-0-T25-15C	=	EPTCS-XXX-0HL-75-65-PP
TLK-75xLL	+	EAS-65xLL	=	TLKEAS-75	EPT-75xLL-PP	+	ERCS-65xLL-0-T25-15C-EAS	=	EPTCS-XXX-YYY-EAS-0-75-65-PP
DVP-EF-7005N	+	EDS-H-50xLL	=	CP-PP-H	EPM-70N-5.1-0.5	+	ERWS-50xLL-0-PH2-15C	=	EPMWS-0-70N-50xLL
DVP-EF-4010N3	+	EDS-H-50xLL	=	DAMP-H	EPM-N3-40N-5.85-1.0	+	ERWS-50xLL-0-PH2-15C	=	EPMWS-0-N3-40N-50xLL
-	-	-	-	-	EPM-51N-5.6-0.84	+	ERSS-67xLL-2-PH3-15C	=	EPMSS-2-51N-67xLL
XXX - clamping range for pre-assembled combination									
XXX-YYY - min/max clamping range for pre-assembled combination with EAS-65xLL (ERCS-65xLL-0-T25-15C-EAS) screw									


Pre-assembled combinations, that are additionally supplied as collated products have extended product key with "C" letter at the end. Example: EPTSS-XXX-0-45-48-PA-C.

Eurofast Flat Roof Fasteners

Pre-assembled combinations

Annex Info.3

of European
Technical Assessment
ETA-23/0651

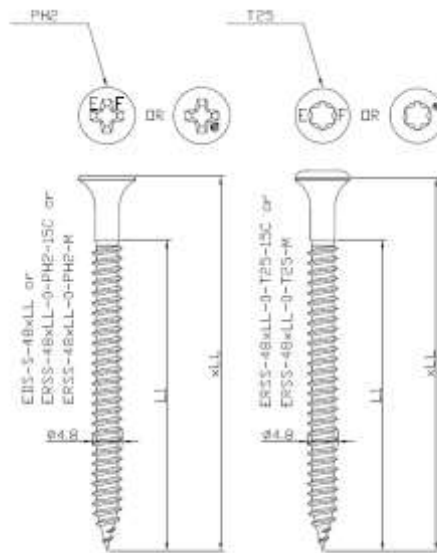

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)						
	Steel S320GD*					
t [mm]	0,60	0,63	0,70	0,75	0,80	0,88
EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M)	0,94	0,94	1,44	1,53	1,55	1,55
ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	0,94	0,94	1,44	1,53	1,55	1,55

* when using steel S280GD, values must be reduced by 8%

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)							
	OSB/3			Chipboard	Plywood		Timber C24
t [mm]	18	21	25	19	18	21	24
EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M)	1,04	1,20	1,22	1,12	0,94	1,02	1,99
ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	1,04	1,20	1,22	1,12	0,94	1,02	1,99

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)					
	DVP-EF-7005D (EPM-70D-5.0-0.5)	DVP-EF-7007D (EPM-70D-6.0-0.7)	DVP-EFB-51NS (EPM-B-51N-5.4-0.84)	DVP-EF-51N (EPM-51N-6.7-0.84)	EPM-IP-80-6.8-0.8
	DVP-EF-7005N (EPM-70N-5.1-0.5)	DVP-EF-7007H (EPM-70H-6.0-0.7)	-	-	EPM-IT-80-6.8-0.8
	-	DVP-EF-7007N (EPM-70N-6.0-0.7)	-	-	EPM-IE-80-6.8-0.8
EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M)	2,36	2,91	3,87	2,93	2,92
ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	2,36	2,91	3,87	2,93	2,92

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M)
ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)

Annex A.1

of European
Technical Assessment
ETA-23/0651

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	-	TLK-45xLL (EPT-45xLL-PP)	EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)
	TRP-45xLL (EPT-45xLL-PA)	HTLK-45xLL (EPT-O-45xLL-PP)	EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)
	BTRP-45xLL (EPT-B-45xLL-PA)	TLK-75xLL (EPT-75xLL-PP)	DVP-EF-5010DFR (EPM-50D-4.85-1.0)
	TWP-8040xLL (EPT-8040xLL-PA)	DVP-DL-70N + TLK-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)	DVP-EF-7070D (EPM-7070D-4.85-1.0)
	EDF-BAR F-TUBE + KMT-15xLL (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)	-	DVP-EF-7010DFR (EPM-70D-4.85-1.0)
	DVP-KMT-8240 + KMT-15xLL (EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)	-	DVP-EF-8240D (EPM-8240D-4.85-1.0)
	EPM-T-IP-80-13.6-0.8 + KMT-15xLL (EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)	-	DVP-EF-8240XH (EPM-8240XH-4.85-1.0)
	EPM-T-IT-80-13.6-0.8 + KMT-15xLL (EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)	-	DVP-EFB-8240D (EPM-B-8240D-4.85-1.0)
	EPM-T-IE-80-13.6-0.8 + KMT-15xLL (EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)	-	DVP-EFZK-8240D (EPM-ZK-8240D-4.85-1.0)
	DVP-DL-70N + TRP-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)	-	DVP-EFF-8040D (EPM-8040D-4.85-1.0)
	-	-	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)
EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M)	2,67	1,77	5,18
ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	2,67	1,77	5,18

* "Pull-over" according to CEN/TS 17659:2021

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)				
	DVP-EF-7010D (EPM-70D-6.5-1.0)	DVP-EF-4010N (EPM-40N-6.0-1.0)	DVP-EF-5010D (EPM-50D-6.3-1.0)	DVP-DF-7070D (EPM-7070D-7.0-1.0)
	DVP-EF-7010N (EPM-70N-6.5-1.0)	KS-EPM-8240XH- 6.0-1.0	DVP-EF-5010N (EPM-50N-6.3-1.0)	DVP-DF-8240D (EPM-8240D-7.0-1.0)
	DVP-EF-8040D (EPM-8040D-6.5-1.0)	-	-	DVP-DF-8240H (EPM-8240H-7.0-1.0)
	DVP-EF-8040N (EPM-8040N-6.5-1.0)	-	-	DVP-DF-8240XH (EPM-8240XH-7.0-1.0)
	-	-	-	DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)
	-	-	-	EBS-xxxx-25-7.1-1.25 (BC-EBS-xxxx-25-7.1-1.25)
EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M)	5,05	4,43	3,89	2,96
ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	5,05	4,43	3,89	2,96

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners	Annex A.2 of European Technical Assessment ETA-23/0651
EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	

Screw:

EDS-S-48xLL	(ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M)
ERSS-48xLL-0-T25-15C	(ERSS-48xLL-0-T25-M)

Metal pressure plate:

DVP-EF-4010N	(EPM-40N-6.0-1.0)	DVP-DF-8240H	(EPM-8240H-7.0-1.0)
DVP-EF-5010DFR	(EPM-50D-4.85-1.0)	DVP-EF-8240XH	(EPM-8240XH-4.85-1.0)
DVP-EF-5010D	(EPM-50D-6.3-1.0)	DVP-DF-8240XH	(EPM-8240XH-7.0-1.0)
DVP-EF-5010N	(EPM-50N-6.3-1.0)	DVP-EFB-51NS	(EPM-B-51N-5.4-0.84)
DVP-EF-7070D	(EPM-7070D-4.85-1.0)	DVP-EF-51N	(EPM-B-51N-6.7-0.84)
DVP-DF-7070D	(EPM-7070D-7.0-1.0)	DVP-EFB-8240D	(EPM-B-8240D-4.85-1.0)
DVP-EF-7010DFR	(EPM-70D-4.85-1.0)	DVP-DFB-8240D	(EPM-B-8240D-7.0-1.0)
DVP-EF-7005D	(EPM-70D-5.0-0.5)	DVP-EFZK-8240D	(EPM-ZK-8240D-4.85-1.0)
DVP-EF-7007D	(EPM-70D-6.0-0.7)	DVP-EFF-8040D	(EPM-8040D-4.85-1.0)
DVP-EF-7010D	(EPM-70D-6.5-1.0)	EPM-IP-80-6.8-0.8	
DVP-EF-7007H	(EPM-70H-6.0-0.7)	EPM-IT-80-6.8-0.8	
DVP-EF-7005N	(EPM-70N-5.1-0.5)	EPM-IE-80-6.8-0.8	
DVP-EF-7007N	(EPM-70N-6.0-0.7)	DVP-KMT-8240 + KMT-15xLL	(EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)
DVP-EF-7010N	(EPM-70N-6.5-1.0)	EPM-T-IP-80-13.6-0.8 + KMT-15xLL	(EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8040D	(EPM-8040D-6.5-1.0)	EPM-T-IT-80-13.6-0.8 + KMT-15xLL	(EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8040N	(EPM-8040N-6.5-1.0)	EPM-T-IE-80-13.6-0.8 + KMT-15xLL	(EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8240D	(EPM-8240D-4.85-1.0)	DVP-DL-70N + TRP-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)
DVP-DF-8240D	(EPM-8240D-7.0-1.0)	DVP-DL-70N + TLK-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)
		KS-EPM-8240XH-6.0-1.0	

Pressure plate with tube:

TRP-45xLL	(EPT-45xLL-PA)
BTRP-45xLL	(EPT-B-45xLL-PA)
TWP-8040xLL	(EPT-8040xLL-PA)
TLK-45xLL	(EPT-45xLL-PP)
HTLK-45xLL	(EPT-O-45xLL-PP)
TLK-75xLL	(EPT-75xLL-PP)

Termination bar:

EDF-BAR F	(ETM-2250-30-4.8-8.5-1.0)
EDF-BAR FB	(ETM-B-2250-30-4.8-8.5-1.0)
EDF-BAR F-TUBE	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)
EDF-BAR F-TUBE + KMT-15xLL	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)
EBS-xxxxx-25-7.1-1.25	(BC-EBS-xxxxx-25-7.1-1.25)

Substrate:

Steel S280		EN 10346
Steel S320		EN 10346
OSB/3	$\rho_{\min} = 550 \text{ kg/m}^3$	EN 12369-1
Chipboard	$\rho_{\min} = 600 \text{ kg/m}^3$	EN 12369-1
Plywood	$\rho_{\min} = 400 \text{ kg/m}^3$	EN 12369-2
Timber, class $\geq$ C24	$\rho_{\min} = 350 \text{ kg/m}^3$	EN 338

Installation data:


Max. drilling capacity in steel substrate:	0,88 mm
Head type:	Bugle Head / Raised Bugle Head
Recess:	PH2 / TX25
Fixing in steel substrate:	Min. 20 mm of the screw fixed through the steel sheet
Fixing in wooden and wood-based substrate:	Full thread through the substrate or minimum embedment depth
Installation force of installation tool in:	
- steel substrate	15 kg
- wooden and wood-based substrate	30 kg
Installation tool speed:	2000 - 2500 rpm

Eurofast Flat Roof Fasteners

EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M)
ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)

Annex A.3

of European
Technical Assessment
ETA-23/0651


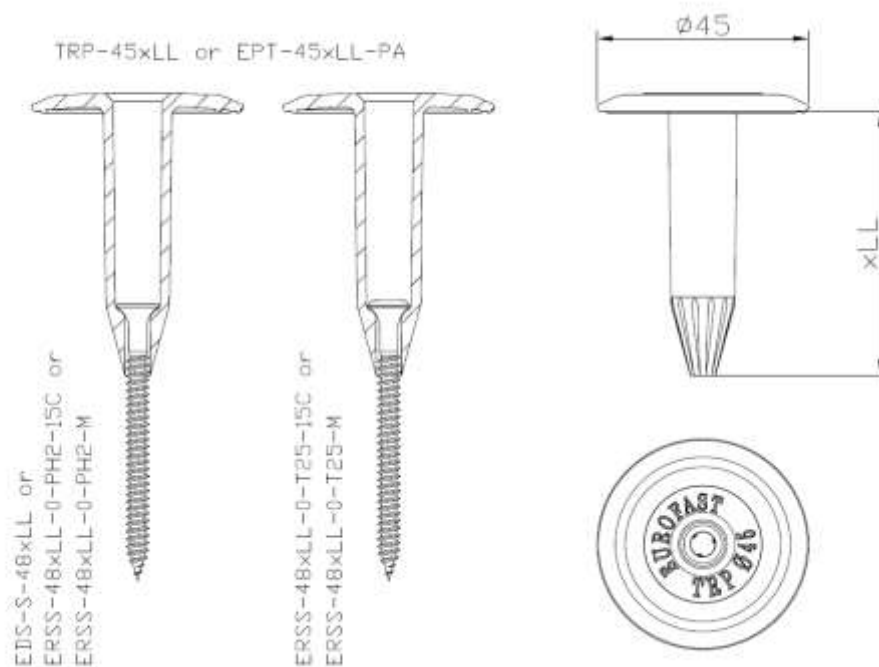




Eurofast Flat Roof Fasteners



EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M)
ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)



Annex A.4



of European
Technical Assessment
ETA-23/0651




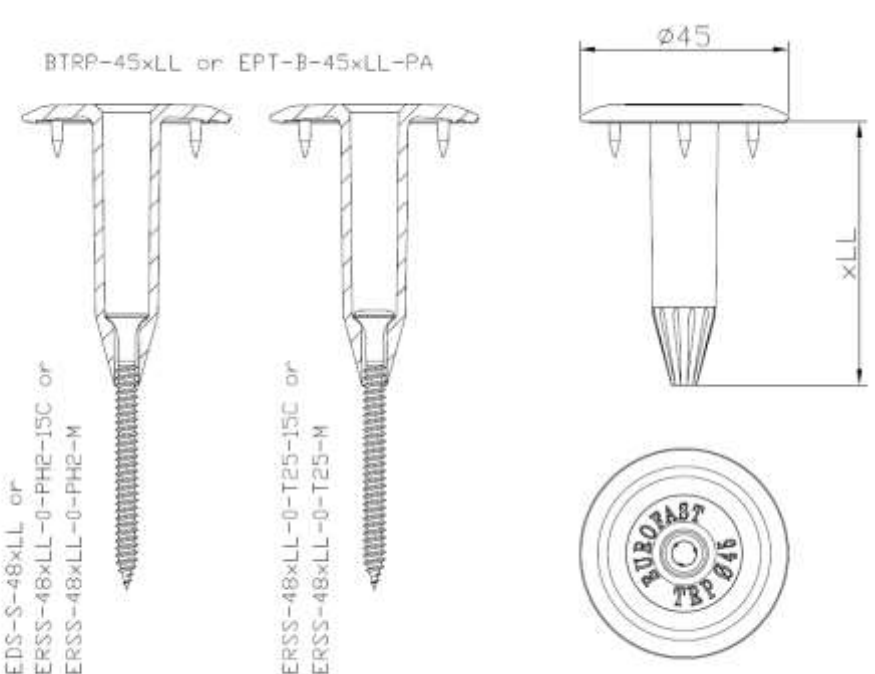
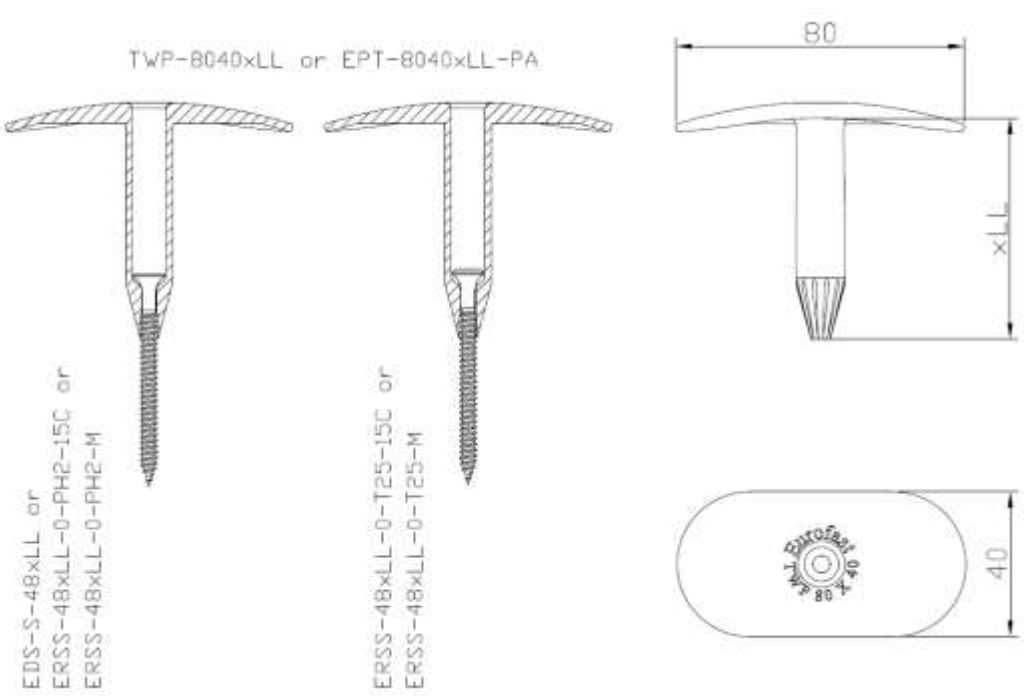
BTRP-45xLL or EPT-B-45xLL-PA  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	
TWP-8040xLL or EPT-8040xLL-PA  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	
Eurofast Flat Roof Fasteners EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	Annex A.5 of European Technical Assessment ETA-23/0651




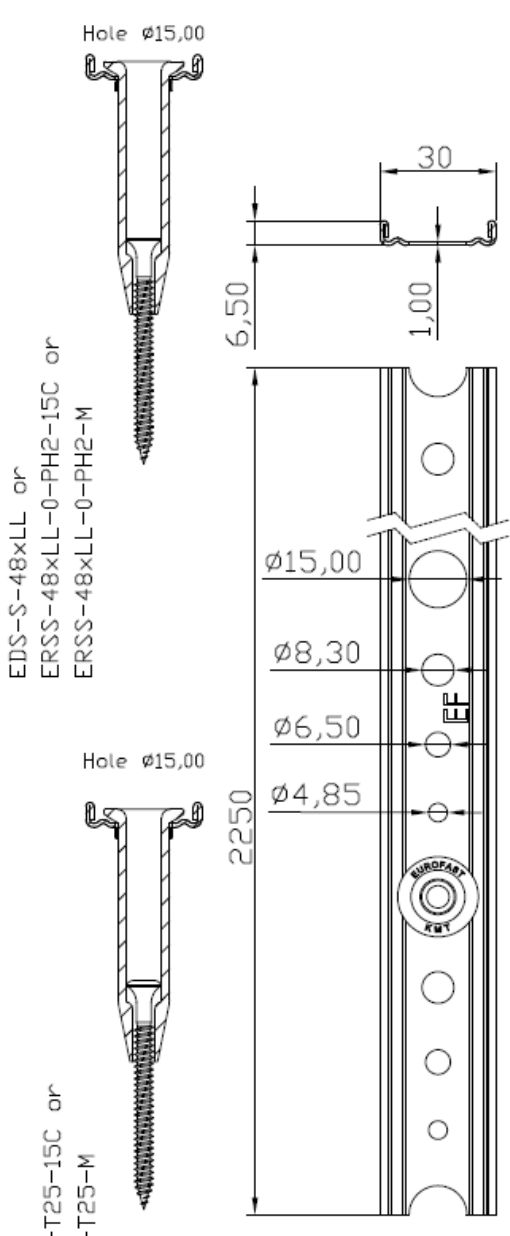
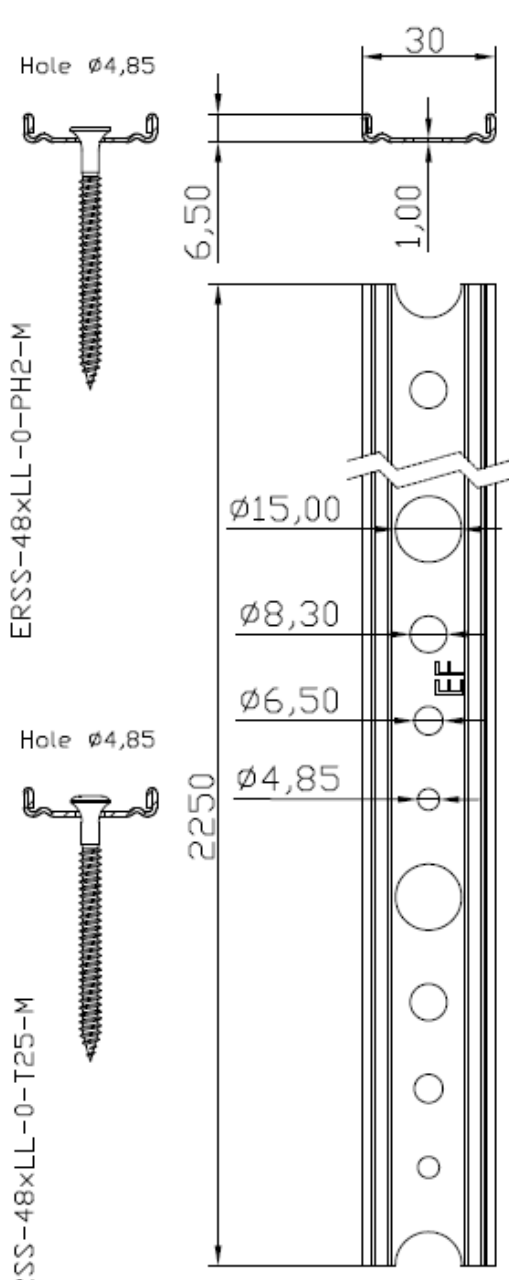
EDF-BAR-F-TUBE + KMT-15xLL or ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA  Hole $\varnothing 15,00$ EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M Hole $\varnothing 15,00$ ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	EDF-BAR-F-TUBE or ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0  Hole $\varnothing 4,85$ EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M Hole $\varnothing 4,85$ ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M
Eurofast Flat Roof Fasteners EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	Annex A.6 of European Technical Assessment ETA-23/0651



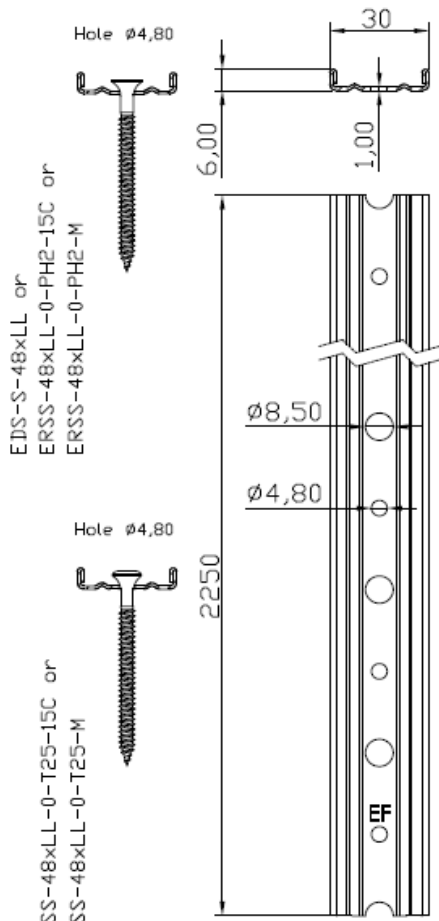
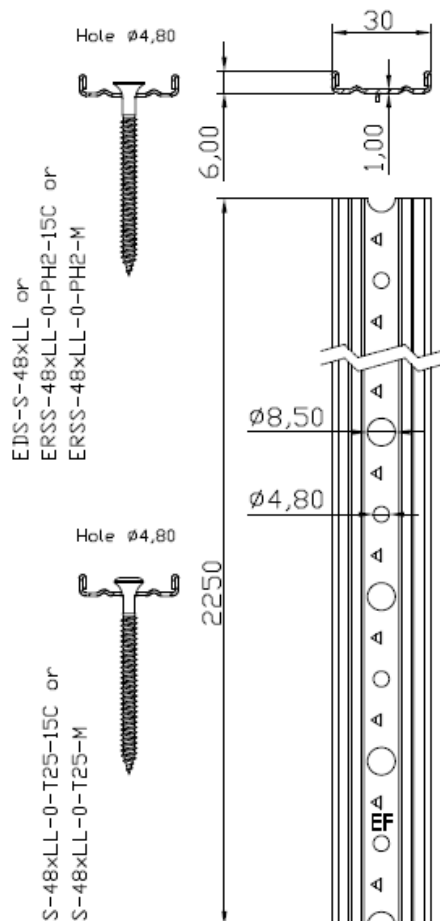
EDF-BAR F or ETM-2250-30-4.8-8.5-1.0  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M Hole $\varnothing 4,80$ 6,00 30 1,00 $\varnothing 8,50$ $\varnothing 4,80$ 2250 ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M Hole $\varnothing 4,80$	EDF-BAR FB or ETM-B-2250-30-4.8-8.5-1.0  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M Hole $\varnothing 4,80$ 6,00 30 1,00 $\varnothing 8,50$ $\varnothing 4,80$ 2250 ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M Hole $\varnothing 4,80$	
Eurofast Flat Roof Fasteners		Annex A.7 of European Technical Assessment ETA-23/0651
EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)		







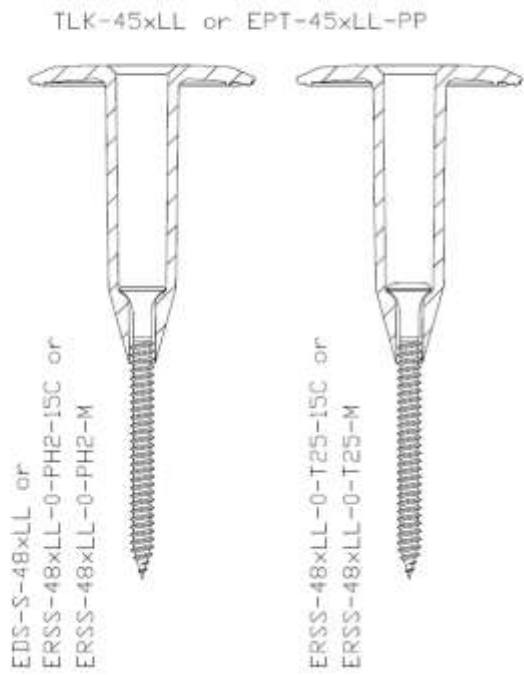
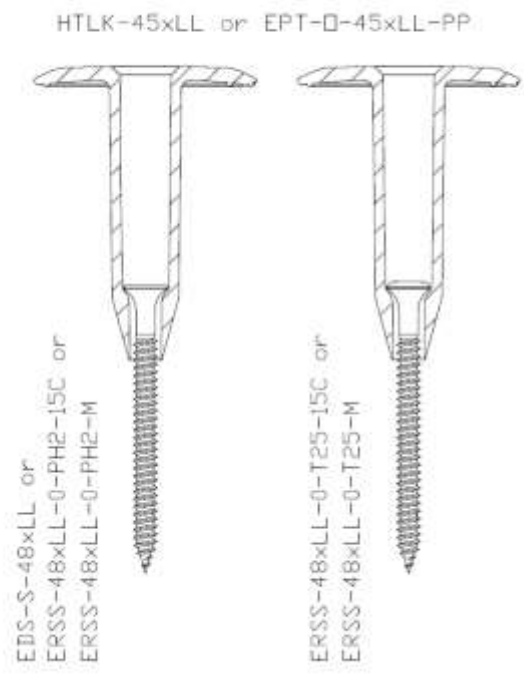
TLK-45xLL or EPT-45xLL-PP  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	
HTLK-45xLL or EPT-D-45xLL-PP  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	
Eurofast Flat Roof Fasteners EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	Annex A.8 of European Technical Assessment ETA-23/0651

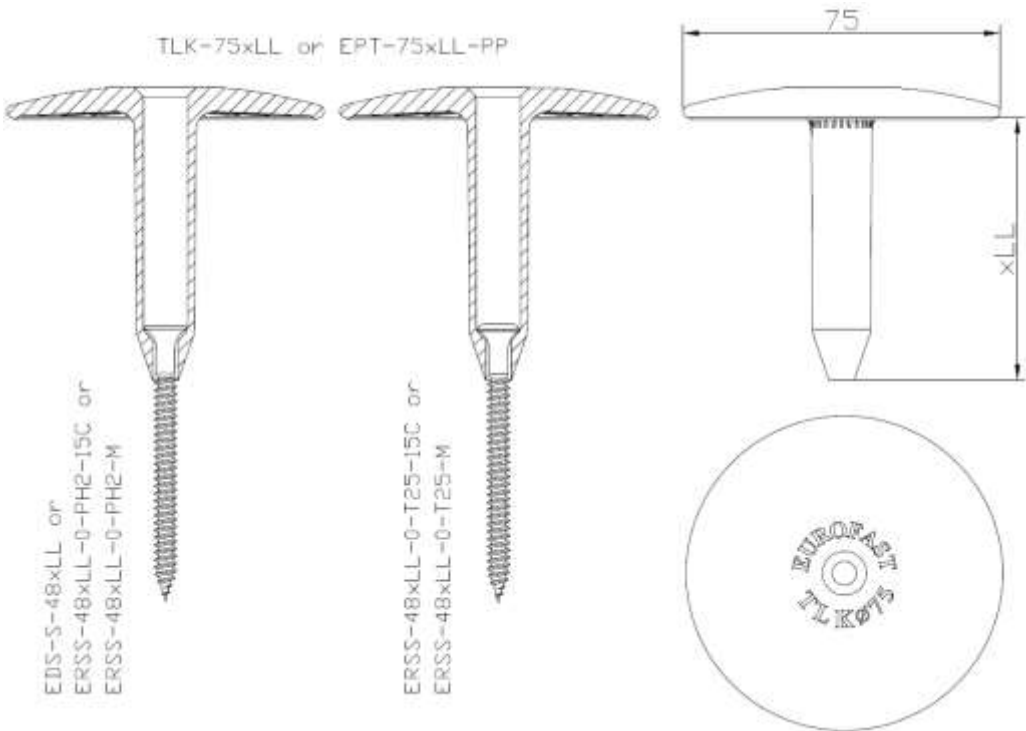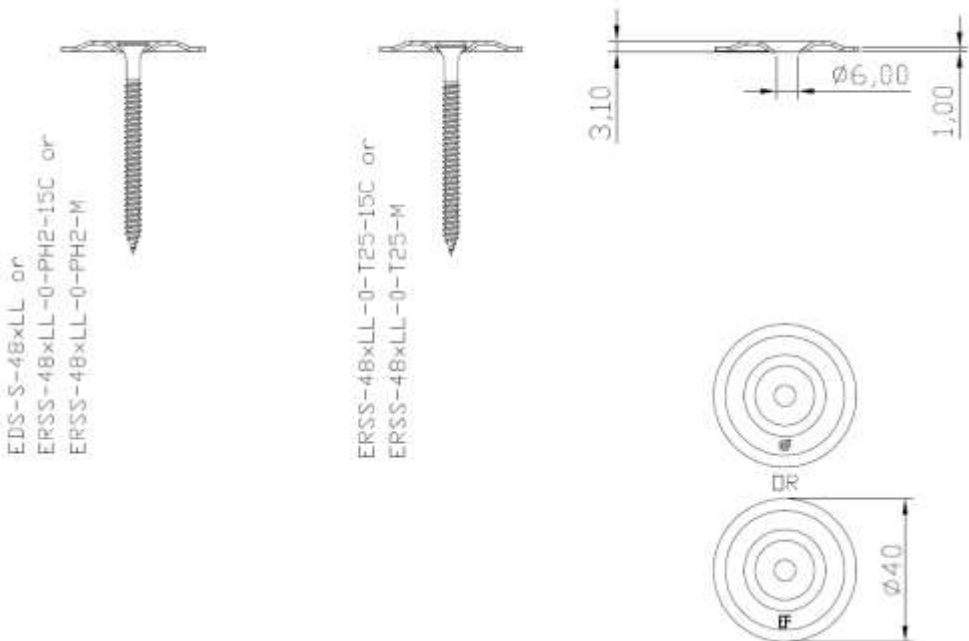TLK-75xLL or EPT-75xLL-PP  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	
DVP-EF-4010N or EPM-40N-6,0-1,0  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	
Eurofast Flat Roof Fasteners EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	Annex A.9 of European Technical Assessment ETA-23/0651

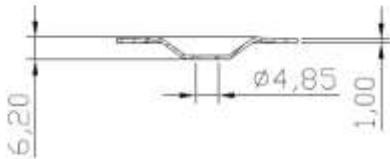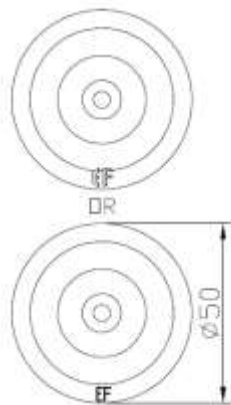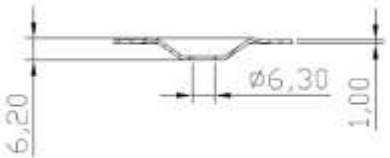
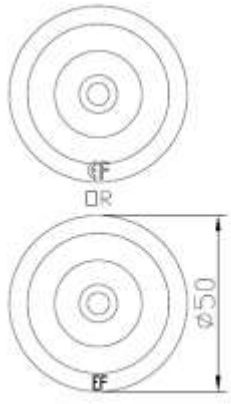
DVP-EF-5010DFR or EPM-50D-4.85-1.0 EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M  ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M   	
DVP-EF-5010D or EPM-50D-6.3-1.0 EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M  ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M   	
Eurofast Flat Roof Fasteners	Annex A.10 of European Technical Assessment ETA-23/0651
EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	

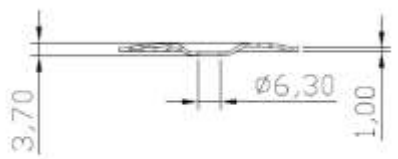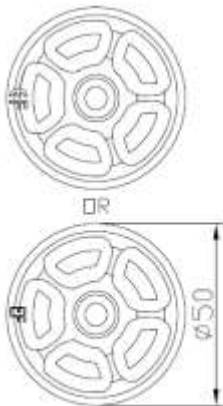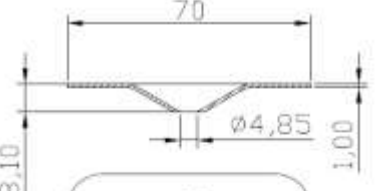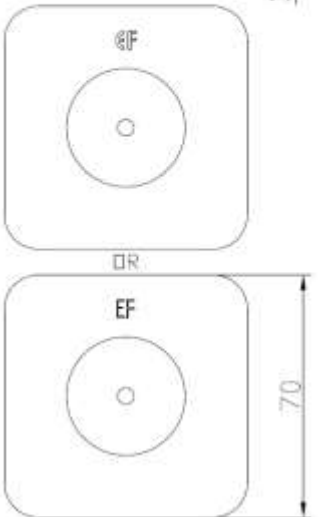DVP-EF-5010N or EPM-50N-6.3-1.0 EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M  ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M   	
DVP-EF-7070D or EPM-7070D-4.85-1.0 EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M  ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M   	
Eurofast Flat Roof Fasteners	Annex A.11 of European Technical Assessment ETA-23/0651
EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	




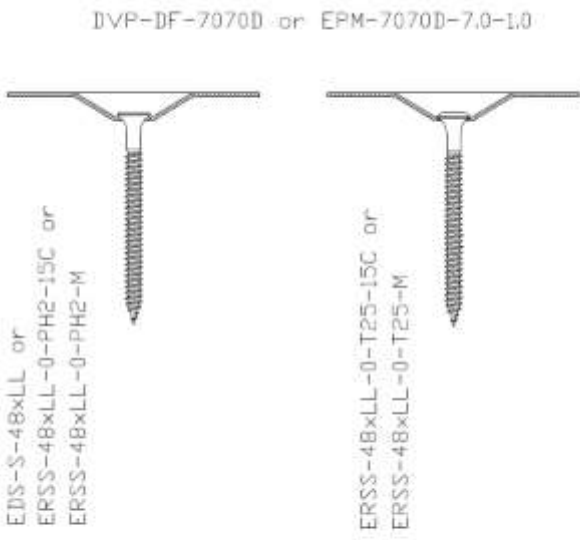
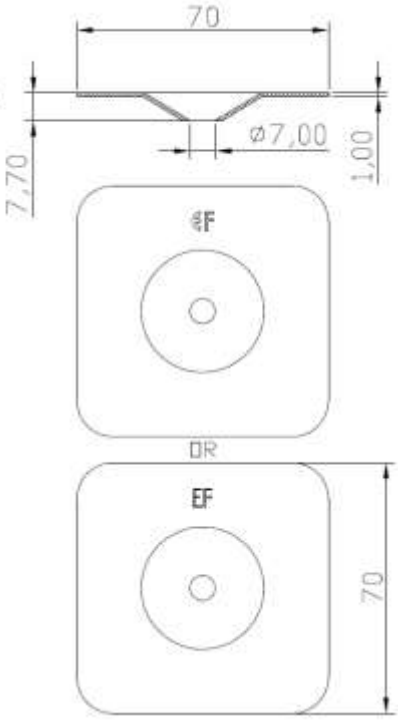
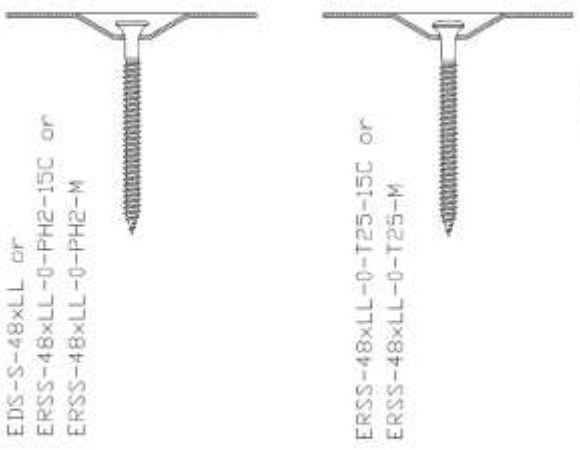
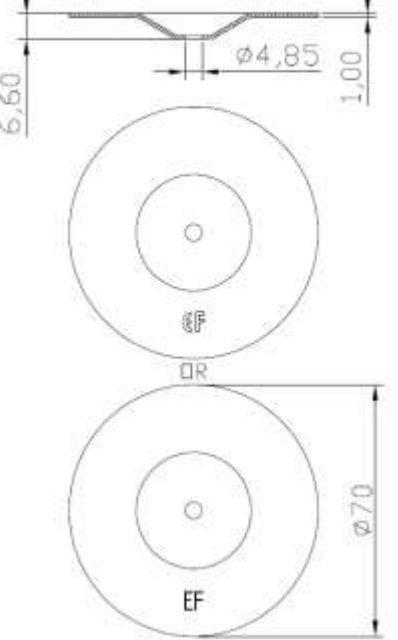
DVP-DF-7070D or EPM-7070D-7.0-1.0  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	 70 7.70 1.00 70 EF OR EF
DVP-EF-7010DFR or EPM-70D-4.85-1.0  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	 6.60 1.00 70 EF OR EF
Eurofast Flat Roof Fasteners EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	Annex A.12 of European Technical Assessment ETA-23/0651

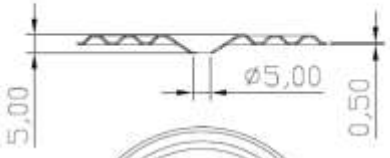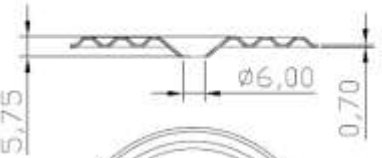DVP-EF-7005D or EPM-70D-5.0-0.5 EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M  ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M   OR 	
DVP-EF-7007D or EPM-70D-6.0-0.7 EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M  ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M   OR 	
Eurofast Flat Roof Fasteners	Annex A.13 of European Technical Assessment ETA-23/0651



EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M)
ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)

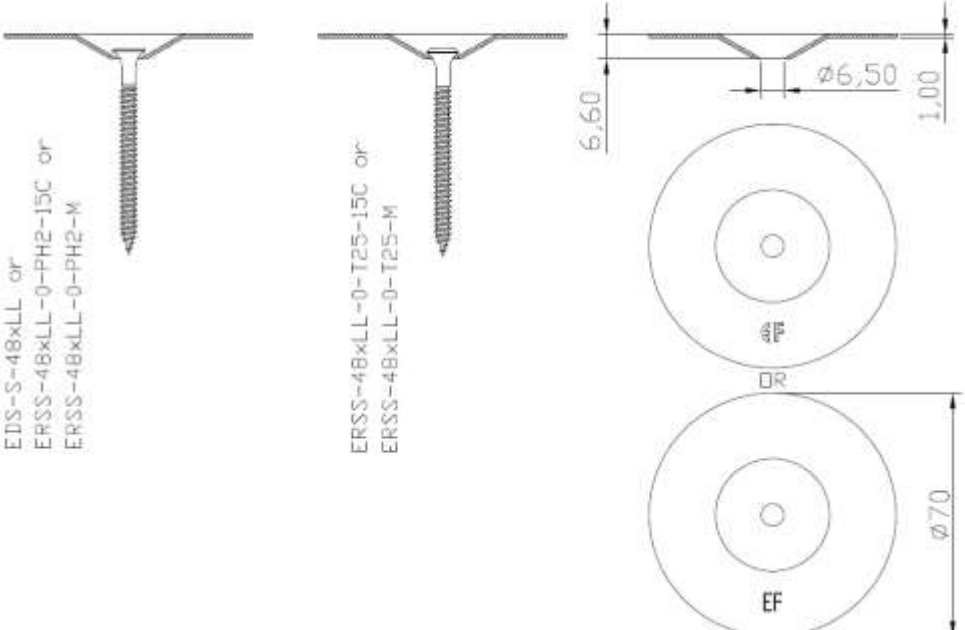
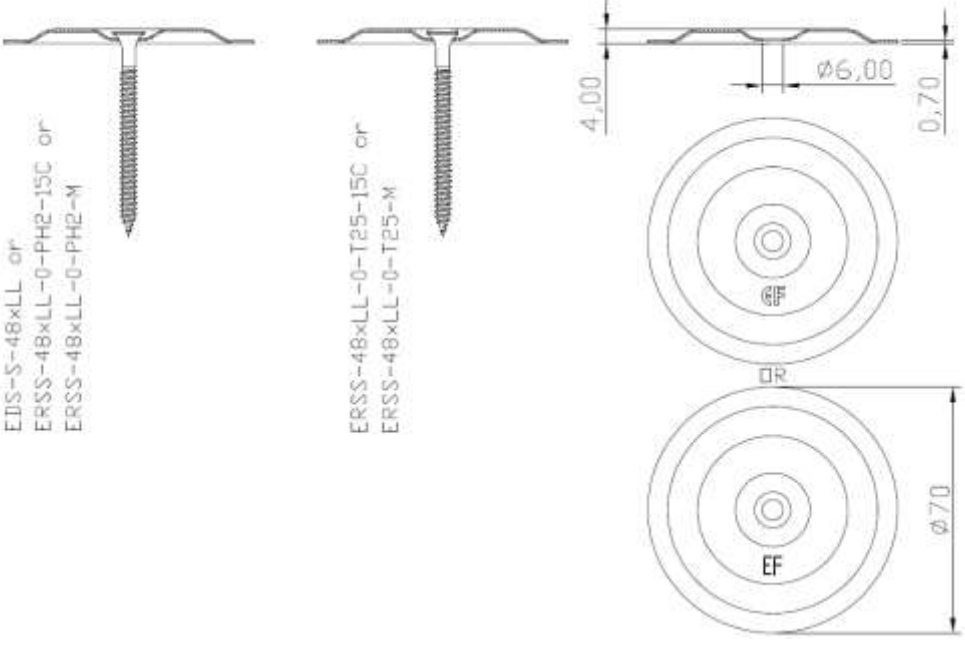
DVP-EF-7010D or EPM-70D-6,5-1,0 	
DVP-EF-7007H or EPM-70H-6,0-0,7 	
Eurofast Flat Roof Fasteners	Annex A.14 of European Technical Assessment ETA-23/0651



EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M)
ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)


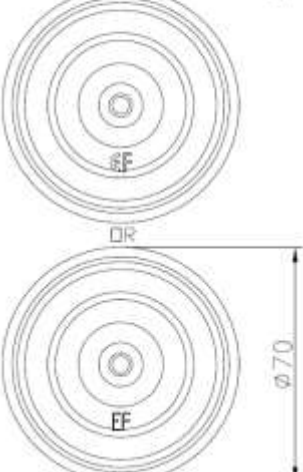



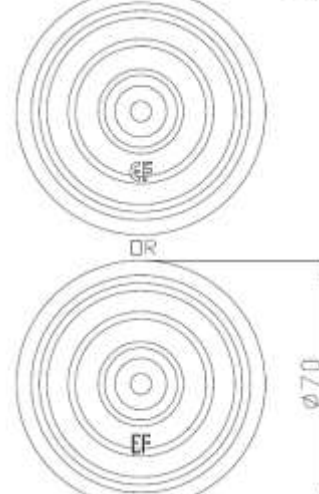
DVP-EF-7005N or EPM-70N-5.1-0.5 EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M  ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M   OR 	
DVP-EF-7007N or EPM-70N-6.0-0.7 EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M  ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M   OR 	
Eurofast Flat Roof Fasteners	Annex A.15 of European Technical Assessment ETA-23/0651



EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M)
ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)







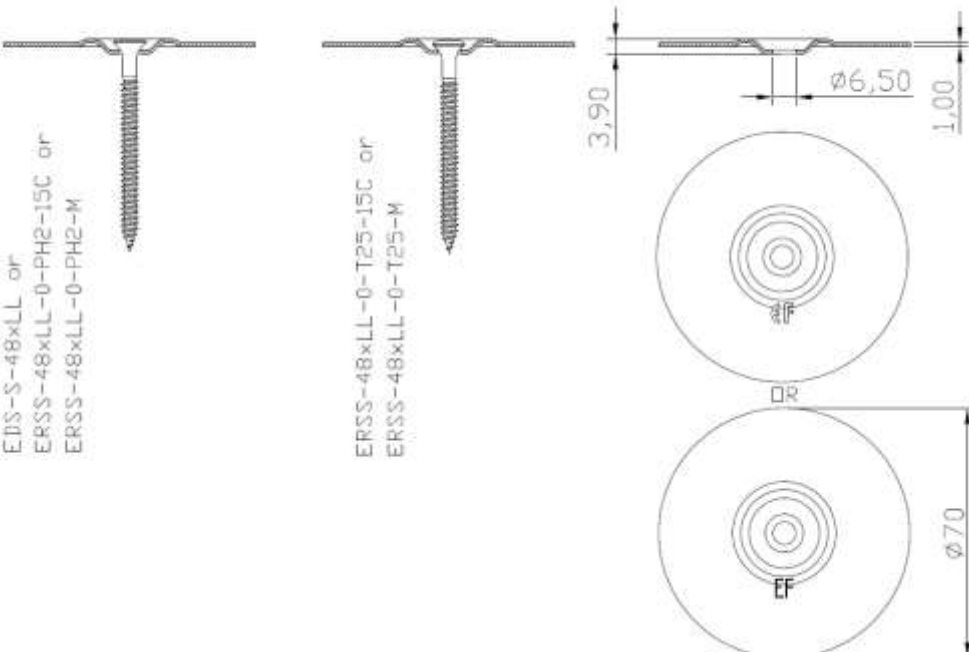
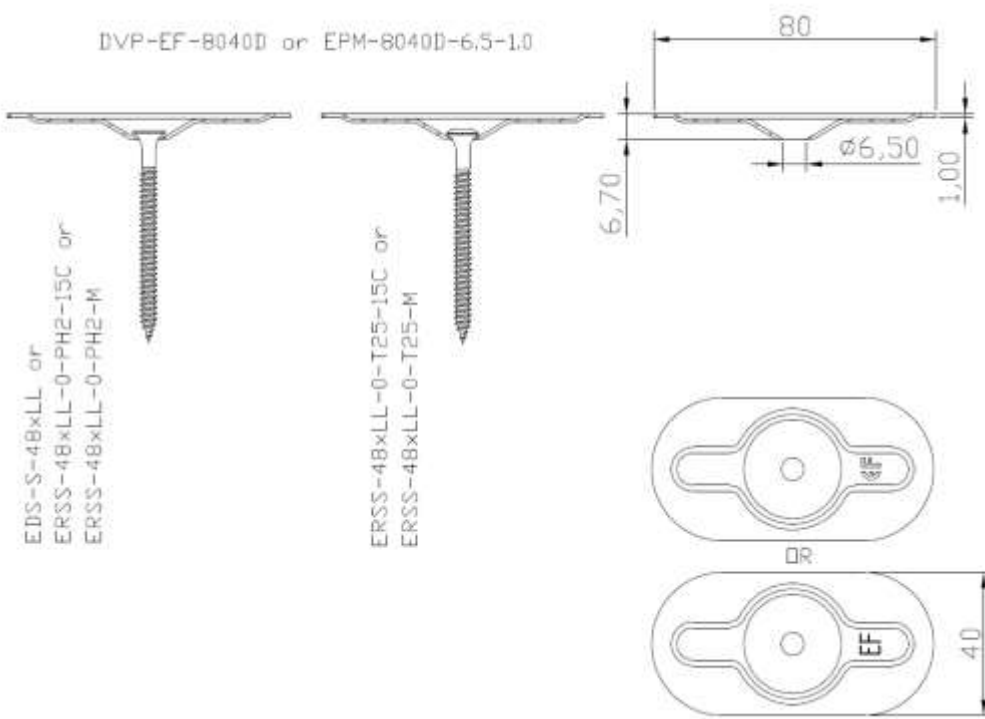
DVP-EF-7010N or EPM-70N-6,5-1,0  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M 3,90 1,00 Ø6,50 EF DR Ø70	
DVP-EF-8040D or EPM-8040D-6,5-1,0  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M 6,70 1,00 80 Ø6,50 EF DR 40	
Eurofast Flat Roof Fasteners EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	Annex A.16 of European Technical Assessment ETA-23/0651



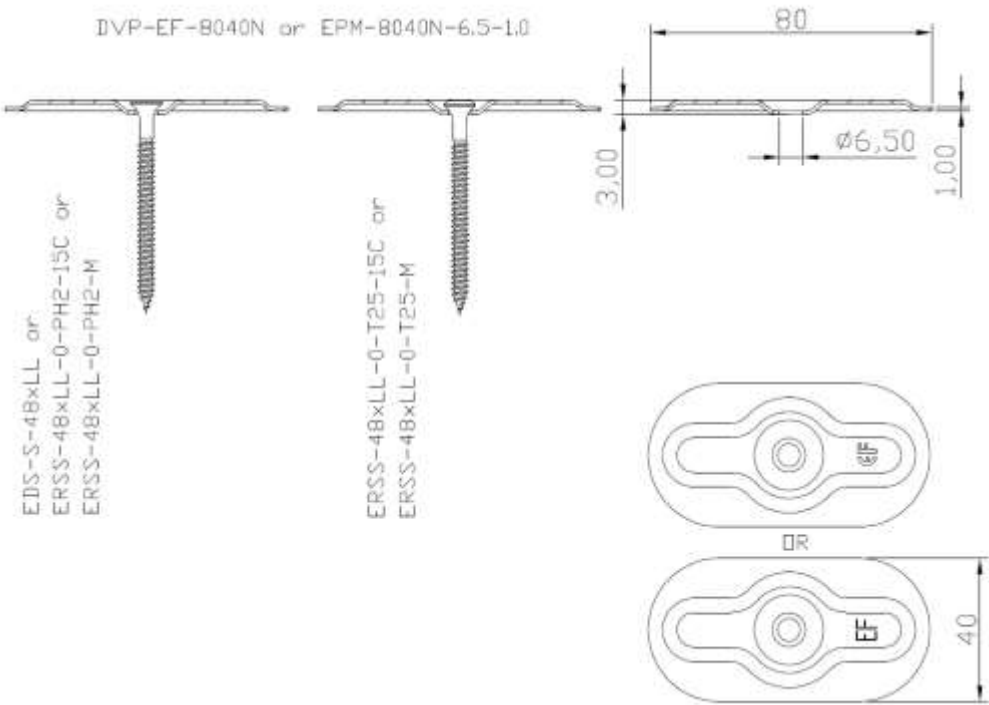
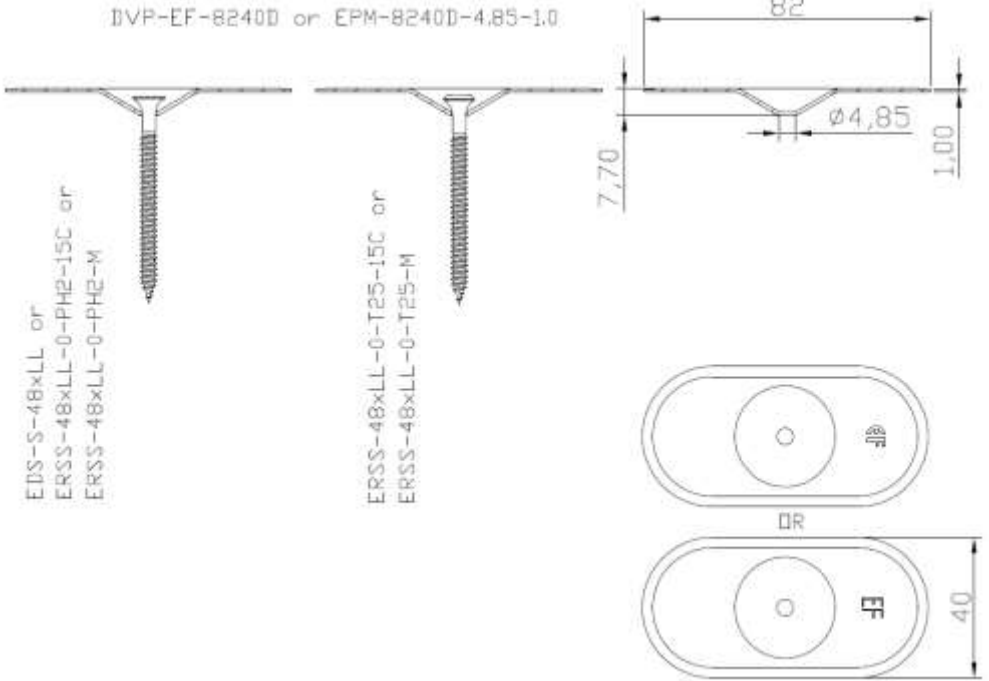
DVP-EF-8040N or EPM-8040N-6.5-1.0  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	
DVP-EF-8240D or EPM-8240D-4.85-1.0  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	
Eurofast Flat Roof Fasteners EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	Annex A.17 of European Technical Assessment ETA-23/0651

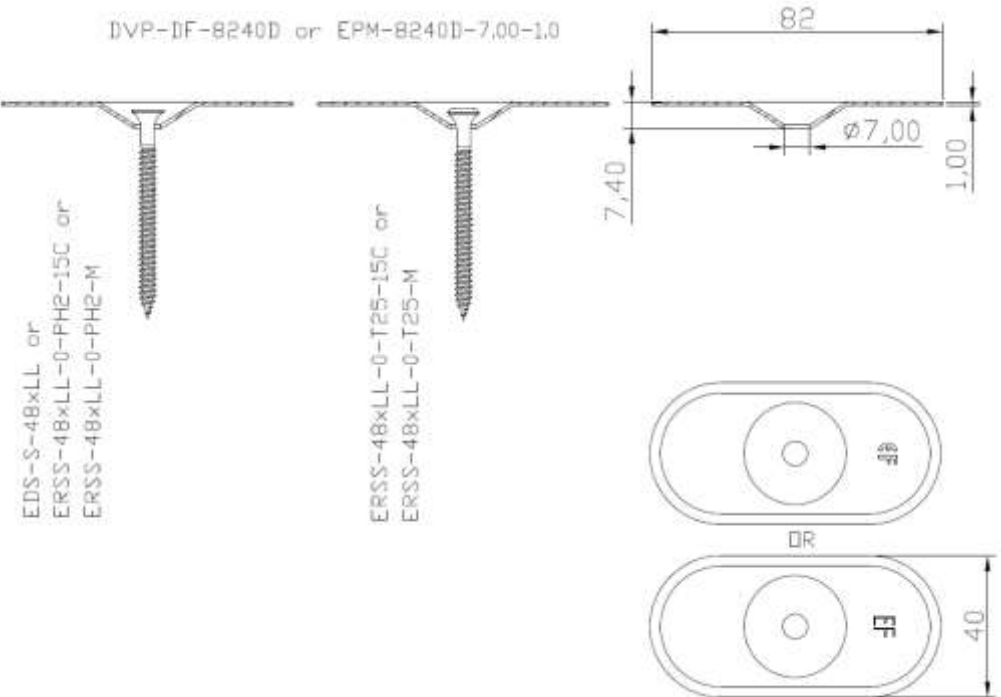
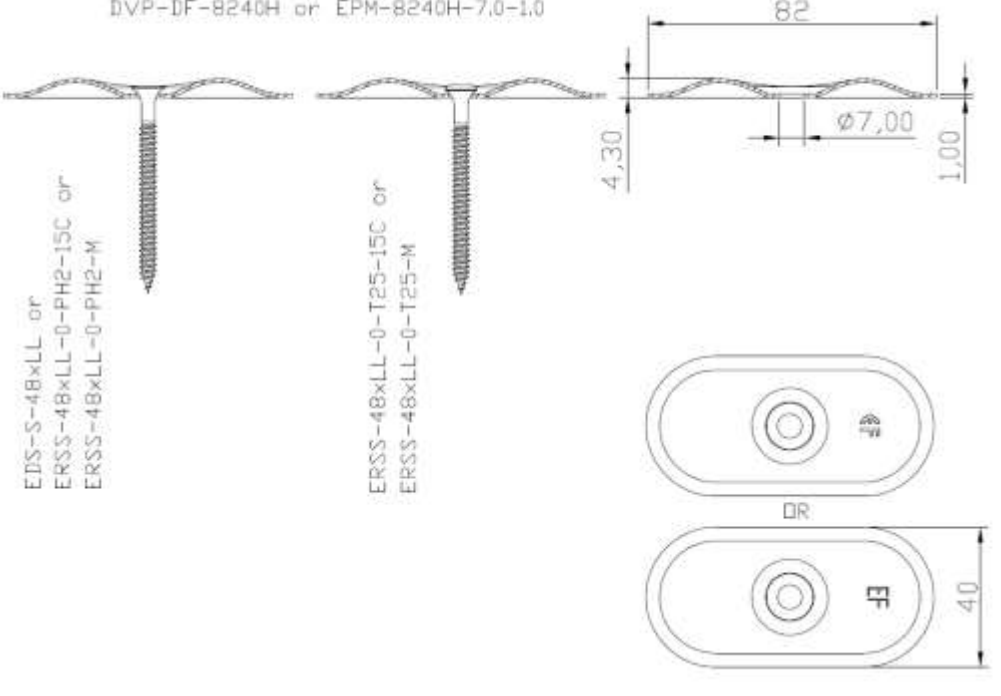
DVP-DF-8240D or EPM-8240D-7,00-1,0 	
DVP-DF-8240H or EPM-8240H-7,0-1,0 	
Eurofast Flat Roof Fasteners EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	Annex A.18 of European Technical Assessment ETA-23/0651

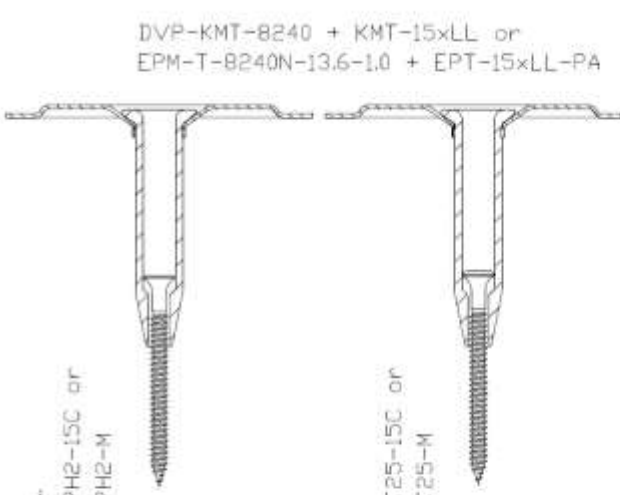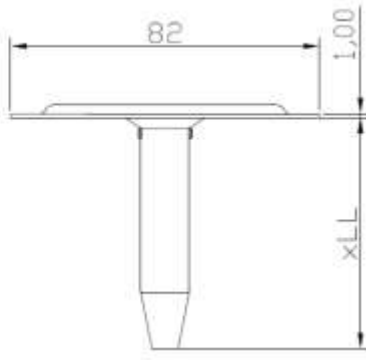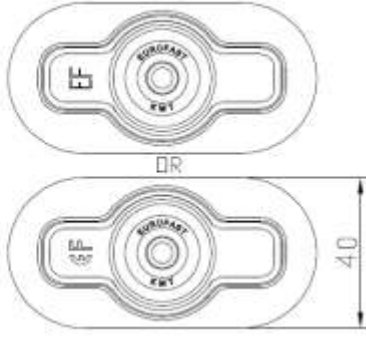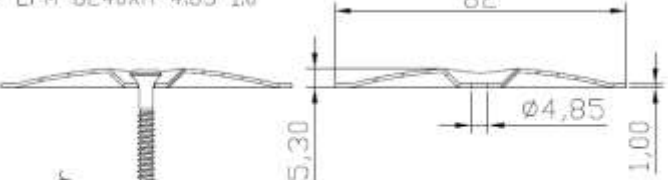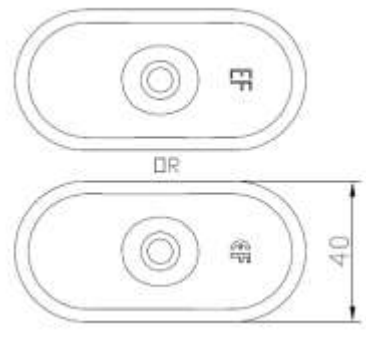EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M  DVP-KMT-8240 + KMT-15xLL or EPM-T-8240N-13,6-1,0 + EPT-15xLL-PA  ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M  	
EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M  DVP-EF-8240XH or EPM-8240XH-4.85-1,0  ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M  	
Eurofast Flat Roof Fasteners EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	Annex A.19 of European Technical Assessment ETA-23/0651

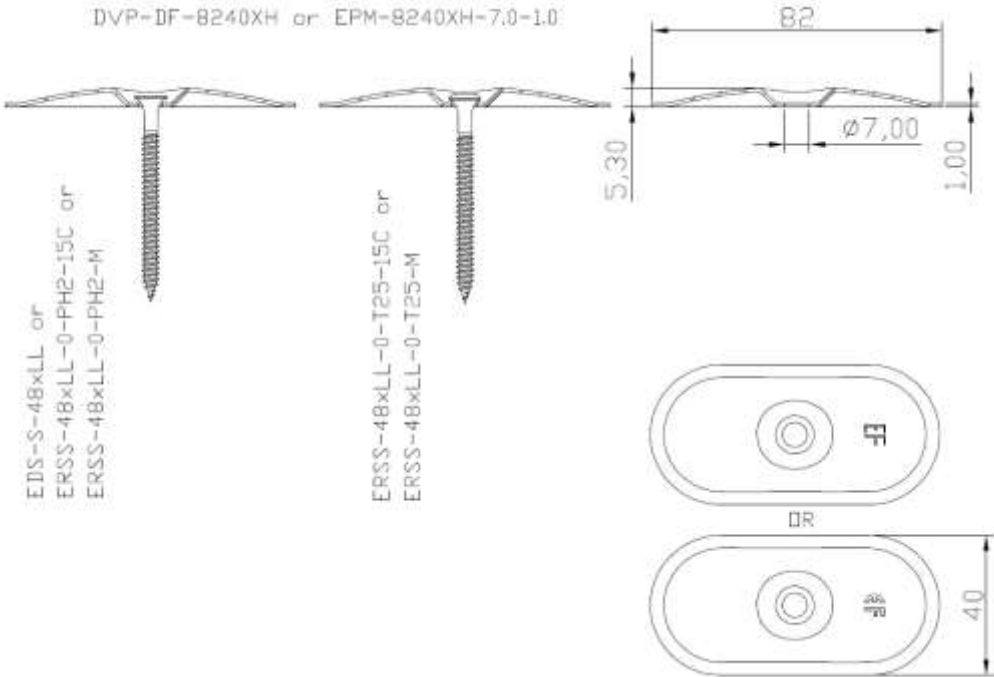
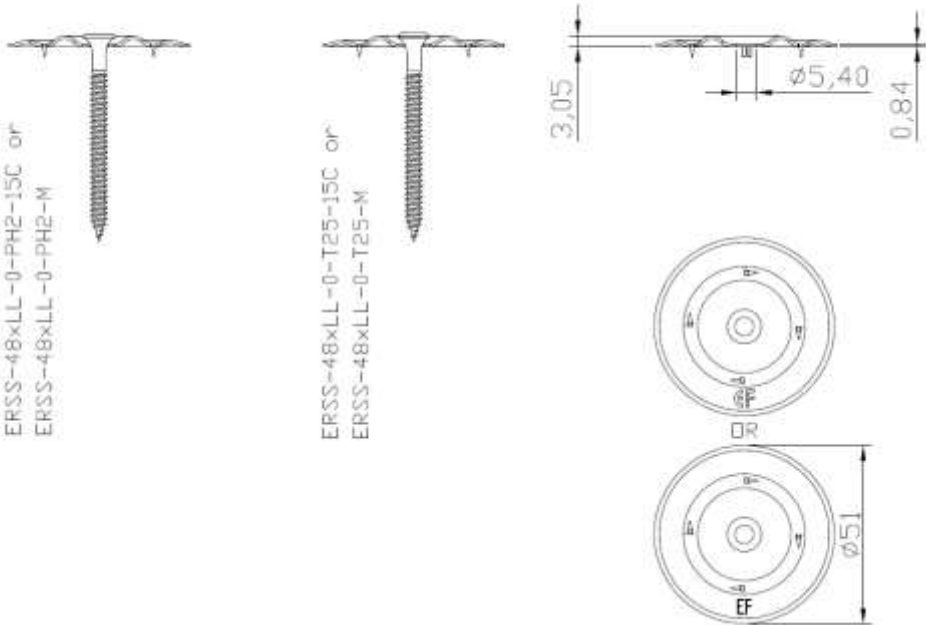
DVP-DF-8240XH or EPM-8240XH-7.0-1.0  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	
DVP-EFB-51NS or EPM-B-51N-5.4-0.84  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	
Eurofast Flat Roof Fasteners EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	Annex A.20 of European Technical Assessment ETA-23/0651

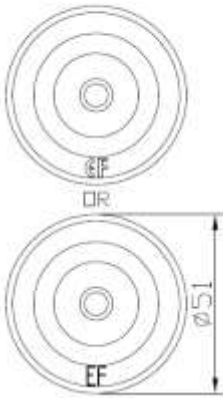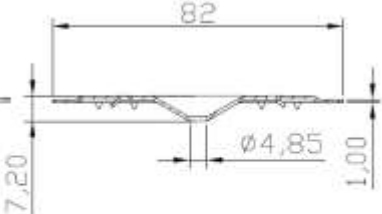

DVP-EF-51N or EPM-51N-6,7-0,84 EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M  ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M   	
DVP-EFB-8240D or EPM-B-8240D-4,85-1,0 EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M  ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M   	
Eurofast Flat Roof Fasteners	Annex A.21 of European Technical Assessment ETA-23/0651
EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	

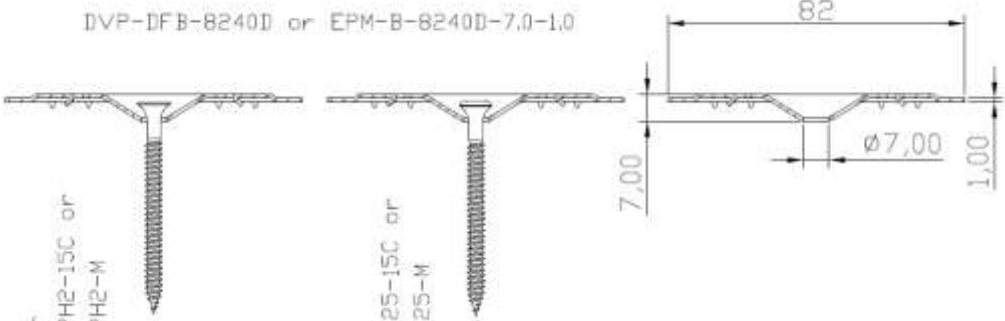
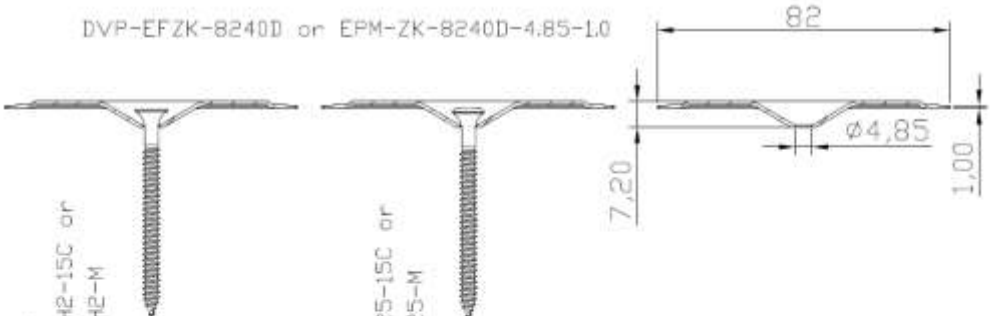
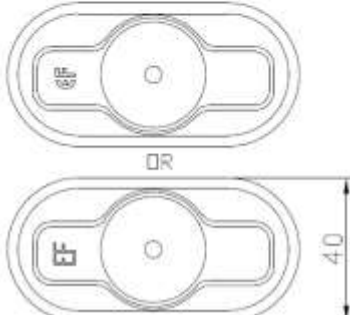
DVP-DFB-8240D or EPM-B-8240D-7,0-1,0  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M 	
DVP-EFZK-8240D or EPM-ZK-8240D-4.85-1,0  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M 	
Eurofast Flat Roof Fasteners EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	Annex A.22 of European Technical Assessment ETA-23/0651

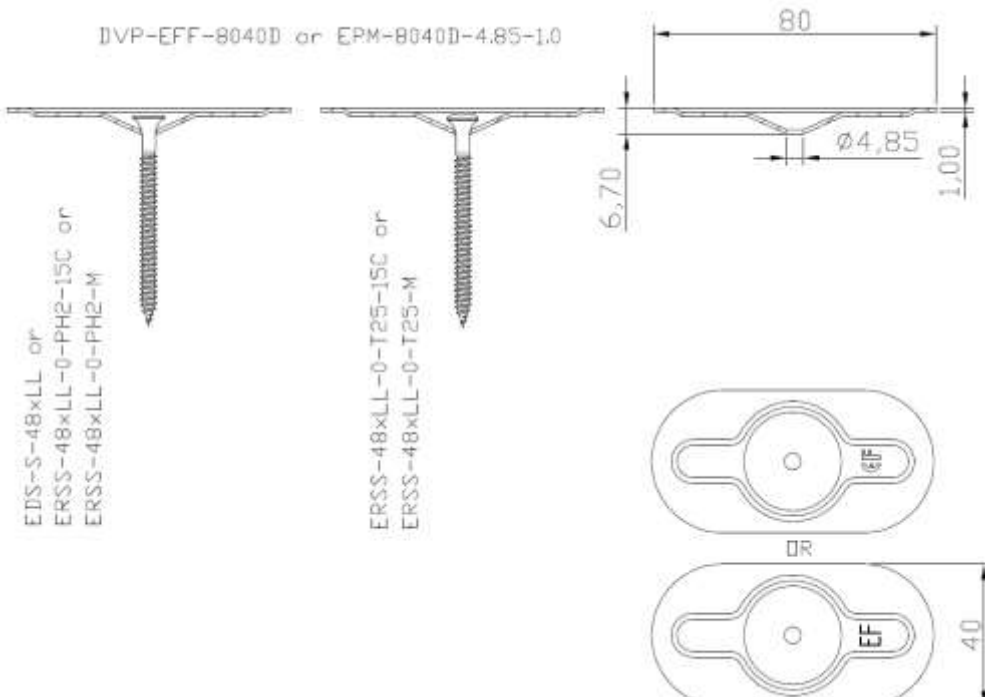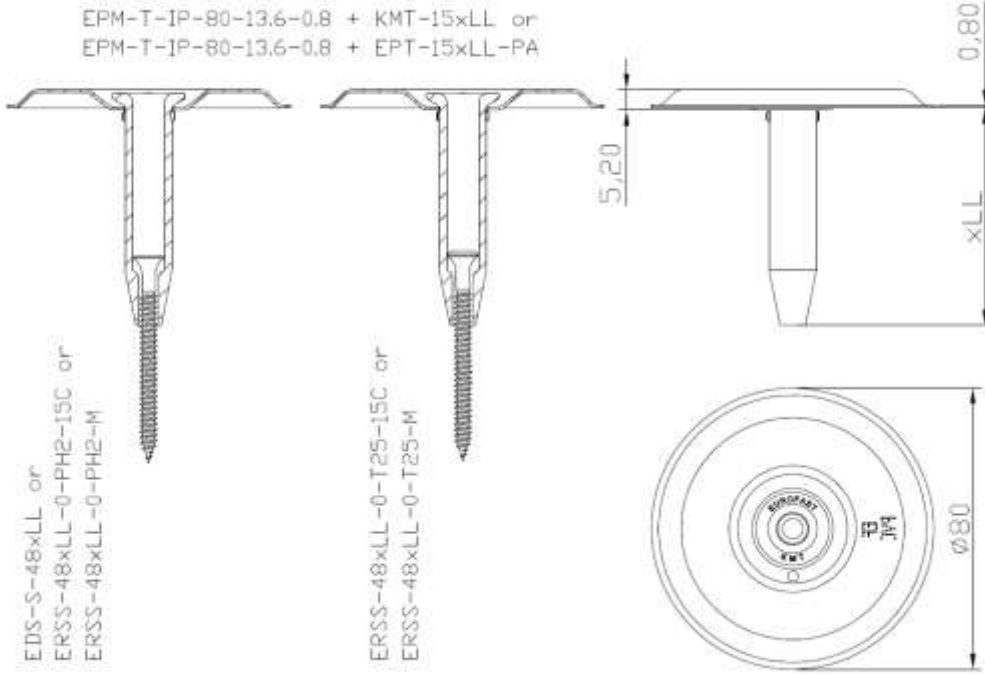 DVP-EFF-8040D or EPM-8040D-4.85-1.0 EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M OR 40	
 EPM-T-IP-80-13.6-0.8 + KMT-15xLL or EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M OR 0.80 xLL Ø80	
Eurofast Flat Roof Fasteners EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	Annex A.23 of European Technical Assessment ETA-23/0651


EPM-IP-80-6.8-0.8 EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	
EPM-T-IT-80-13.6-0.8 + KMT-15xLL or EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	
Eurofast Flat Roof Fasteners EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	Annex A.24 of European Technical Assessment ETA-23/0651

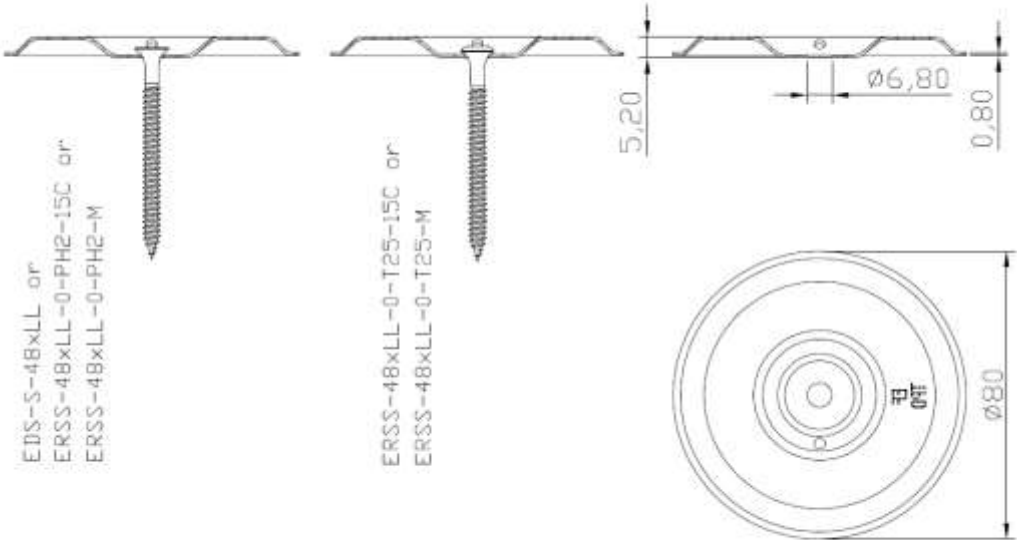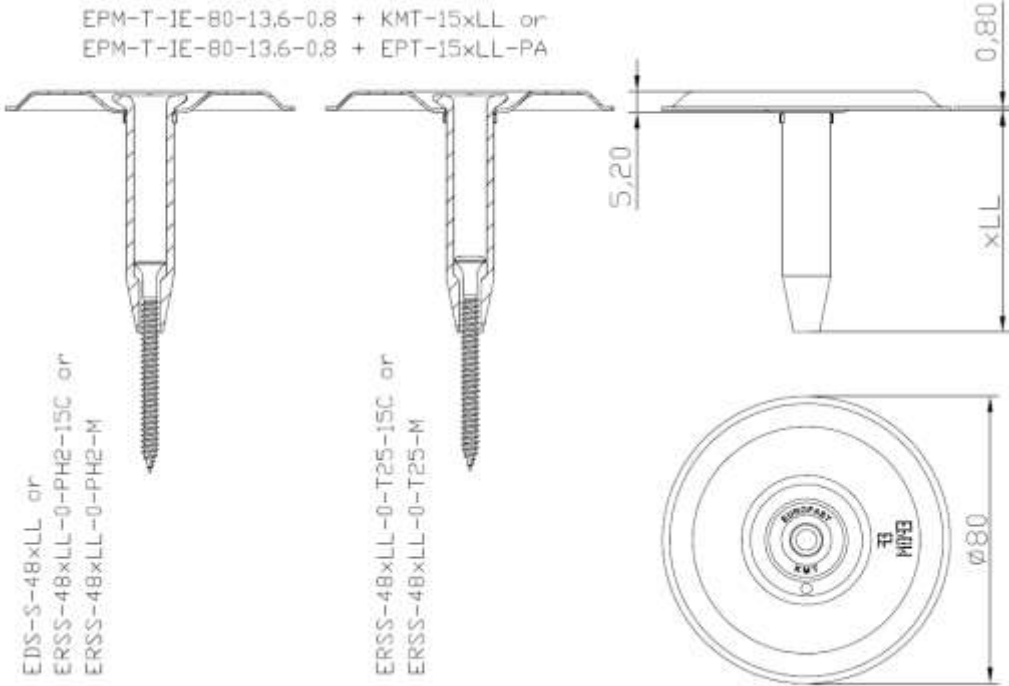EPM-1T-80-6.8-0.8  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	
EPM-T-IE-80-13.6-0.8 + KMT-15xLL or EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M	
Eurofast Flat Roof Fasteners	Annex A.25 of European Technical Assessment ETA-23/0651
EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	

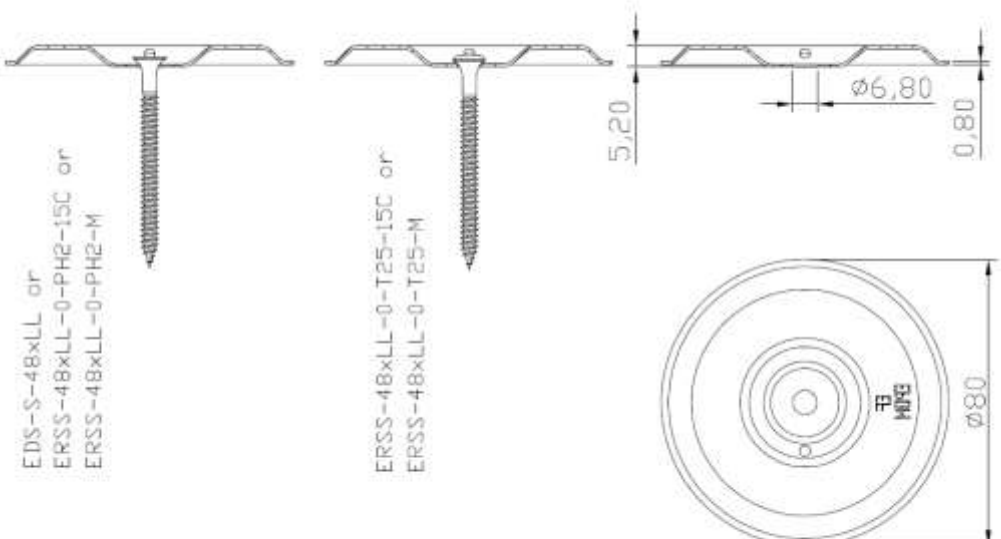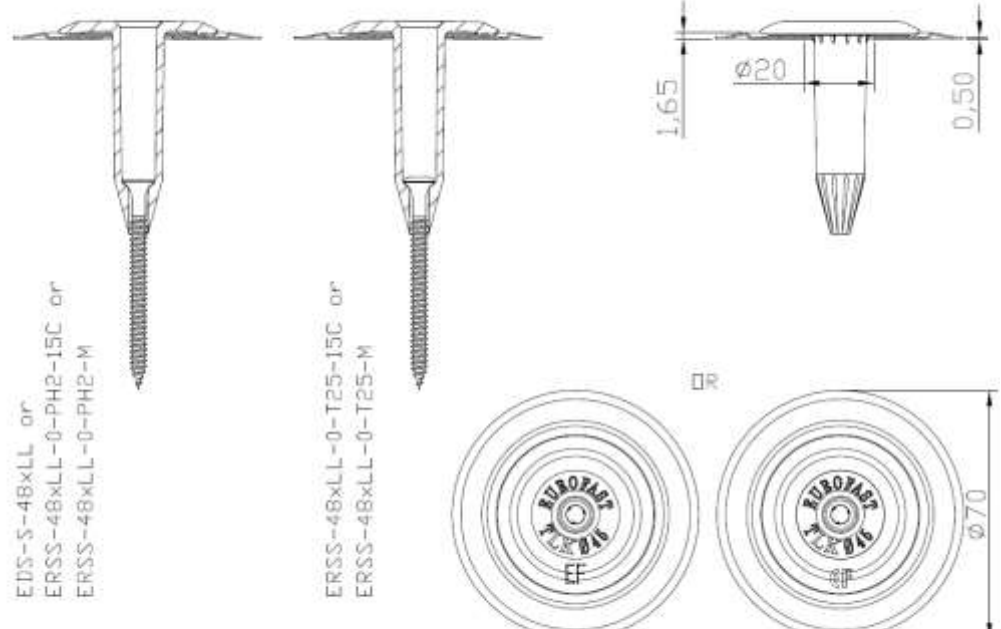EPM-IE-80-6.8-0.8 	
DVP-DL-70N + TLK-45xLL or EPM-EDL-70N-20-0.5 + EPT-45xLL-PP 	
Eurofast Flat Roof Fasteners EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	Annex A.26 of European Technical Assessment ETA-23/0651

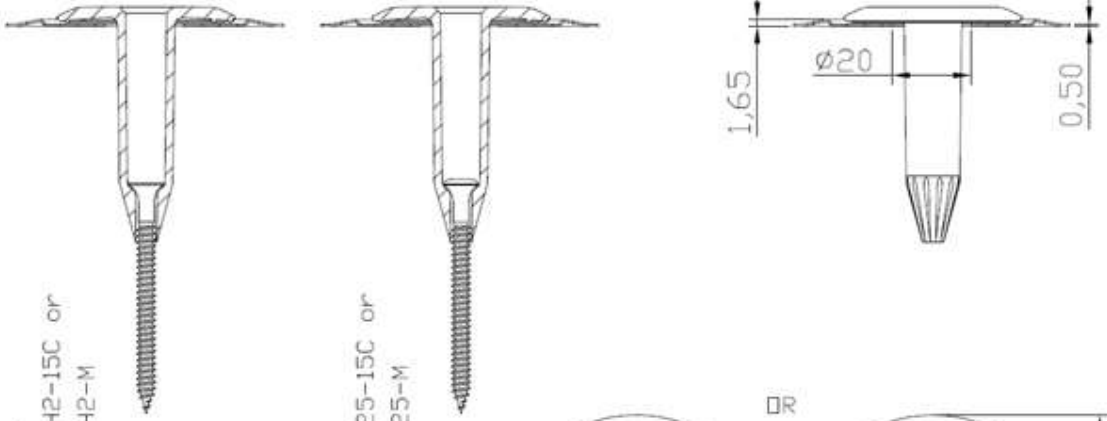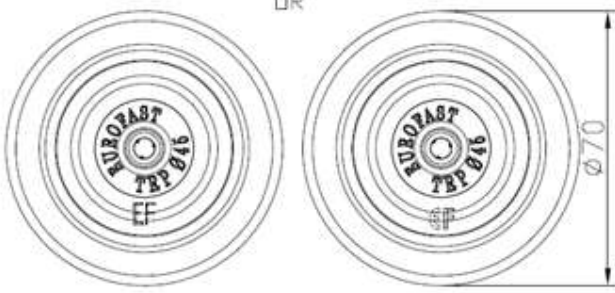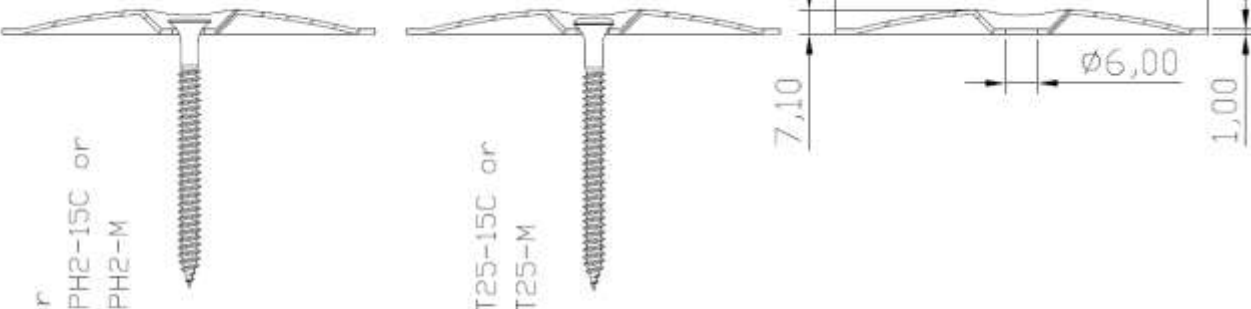DVP-DL-70N + TRP-45xLL or EPM-EDL-70N-20-0,5 + EPT-45xLL-PA  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M  OR	
KS-EPM-8240XH-6,0-1,0  EDS-S-48xLL or ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M ERSS-48xLL-0-T25-15C or ERSS-48xLL-0-T25-M 	
Eurofast Flat Roof Fasteners EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M) ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)	Annex A.27 of European Technical Assessment ETA-23/0651

EBS-xxxxx-25-7.1-1.25 or
BC-EBS-xxxxx-25-7.1-1.25

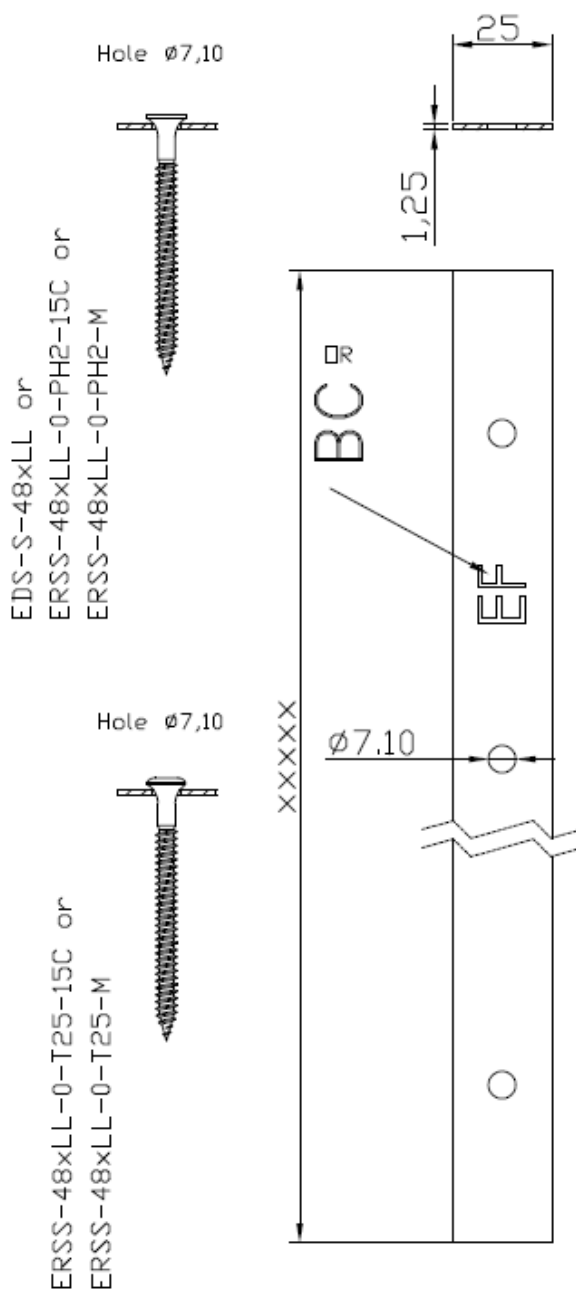


Eurofast Flat Roof Fasteners

EDS-S-48xLL (ERSS-48xLL-0-PH2-15C or ERSS-48xLL-0-PH2-M)
ERSS-48xLL-0-T25-15C (ERSS-48xLL-0-T25-M)

Annex A.28

of European
Technical Assessment
ETA-23/0651

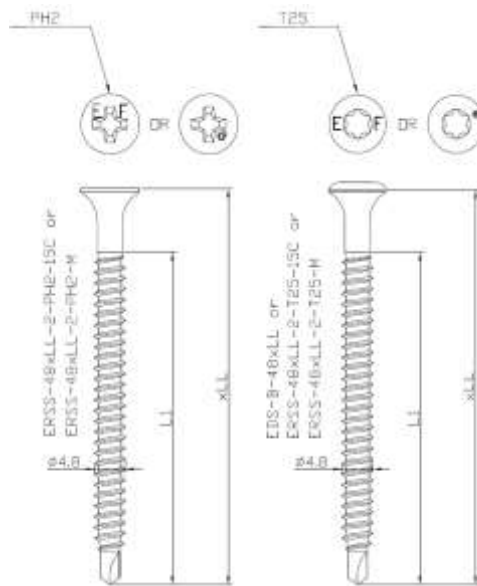

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)						
	Steel S320GD*					
t [mm]	0,70	0,75	0,80	0,88	1,00	1,25
EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)	1,18	1,50	1,60	1,60	1,65	2,26
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)	1,18	1,50	1,60	1,60	1,65	2,26

* when using steel S280GD, values must be reduced by 8%

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)							
	OSB/3			Chipboard	Plywood		Timber C24
t [mm]	18	21	25	19	18	21	24
EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)	1,12	1,20	1,22	1,18	1,08	1,29	1,78
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)	1,12	1,20	1,22	1,18	1,08	1,29	1,78

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)					
	DVP-EF-7005D (EPM-70D-5.0-0.5)	DVP-EF-7007D (EPM-70D-6.0-0.7)	DVP-EF-51NS (EPM-B-51N-5.4-0.84)	DVP-EF-51N (EPM-51N-6.7-0.84)	EPM-IP-80-6.8-0.8
	DVP-EF-7005N (EPM-70N-5.1-0.5)	DVP-EF-7007H (EPM-70H-6.0-0.7)	-	-	EPM-IT-80-6.8-0.8
	-	DVP-EF-7007N (EPM-70N-6.0-0.7)	-	-	EPM-IE-80-6.8-0.8
EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)	2,36	2,91	3,87	2,93	2,92
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)	2,36	2,91	3,87	2,93	2,92

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.1

of European
Technical Assessment
ETA-23/0651

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	-	TLK-45xLL (EPT-45xLL-PP)	HTLK-45xLL (EPT-O-45xLL-PP)
	TRP-45xLL (EPT-45xLL-PA)	TLK-75xLL (EPT-75xLL-PP)	-
	BTRP-45xLL (EPT-B-45xLL-PA)	DVP-DL-70N + TLK-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)	-
	TWP-8040xLL (EPT-8040xLL-PA)	-	-
	EDF-BAR F-TUBE + KMT-15xLL (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)	-	-
	DVP-KMT-8240 + KMT-15xLL (EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)	-	-
	EPM-T-IP-80-13.6-0.8 + KMT-15xLL (EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IT-80-13.6-0.8 + KMT-15xLL (EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IE-80-13.6-0.8 + KMT-15xLL (EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	DVP-DL-70N + TRP-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)	-	-
EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)	2,64	1,68	1,78
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)	2,64	1,68	1,78

* "Pull-over" according to CEN/TS 17659:2021

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)					
	EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)	DVP-EF-7010D (EPM-70D-6.5-1.0)	DVP-EF-4010N (EPM-40N-6.0-1.0)	DVP-EF-5010D (EPM-50D-6.3-1.0)	DVP-DF-7070D (EPM-7070D-7.0-1.0)
	EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)	DVP-EF-7010N (EPM-70N-6.5-1.0)	KS-EPM-8240XH-6.0-1.0	DVP-EF-5010N (EPM-50N-6.3-1.0)	DVP-DF-8240D (EPM-8240D-7.0-1.0)
	DVP-EF-5010DFR (EPM-50D-4.85-1.0)	DVP-EF-8040D (EPM-8040D-6.5-1.0)	-	-	DVP-DF-8240H (EPM-8240H-7.0-1.0)
	DVP-EF-7070D (EPM-7070D-4.85-1.0)	DVP-EF-8040N (EPM-8040N-6.5-1.0)	-	-	DVP-DF-8240XH (EPM-8240XH-7.0-1.0)
	DVP-EF-7010DFR (EPM-70D-4.85-1.0)	-	-	-	DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)
	DVP-EF-8240D (EPM-8240D-4.85-1.0)	-	-	-	EBS-xxxxx-25-7.1-1.25 (BC-EBS-xxxxx-25-7.1-1.25)
	DVP-EF-8240XH (EPM-8240XH-4.85-1.0)	-	-	-	-
	DVP-EFB-8240D (EPM-B-8240D-4.85-1.0)	-	-	-	-
	DVP-EFZK-8240D (EPM-ZK-8240D-4.85-1.0)	-	-	-	-
	DVP-EFF-8040D (EPM-8040D-4.85-1.0)	-	-	-	-
	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)	-	-	-	-
EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)	5,18	5,05	4,43	3,89	2,96
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)	5,18	5,05	4,43	3,89	2,96

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.2

of European
Technical Assessment
ETA-23/0651

Screw:

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
 ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Metal pressure plate:

DVP-EF-4010N	(EPM-40N-6.0-1.0)	DVP-DF-8240H	(EPM-8240H-7.0-1.0)
DVP-EF-5010DFR	(EPM-50D-4.85-1.0)	DVP-EF-8240XH	(EPM-8240XH-4.85-1.0)
DVP-EF-5010D	(EPM-50D-6.3-1.0)	DVP-DF-8240XH	(EPM-8240XH-7.0-1.0)
DVP-EF-5010N	(EPM-50N-6.3-1.0)	DVP-EFB-51NS	(EPM-B-51N-5.4-0.84)
DVP-EF-7070D	(EPM-7070D-4.85-1.0)	DVP-EF-51N	(EPM-51N-6.7-0.84)
DVP-DF-7070D	(EPM-7070D-7.0-1.0)	DVP-EFB-8240D	(EPM-B-8240D-4.85-1.0)
DVP-EF-7010DFR	(EPM-70D-4.85-1.0)	DVP-DFB-8240D	(EPM-B-8240D-7.0-1.0)
DVP-EF-7005D	(EPM-70D-5.0-0.5)	DVP-EFZK-8240D	(EPM-ZK-8240D-4.85-1.0)
DVP-EF-7007D	(EPM-70D-6.0-0.7)	DVP-EFF-8040D	(EPM-8040D-4.85-1.0)
DVP-EF-7010D	(EPM-70D-6.5-1.0)	EPM-IP-80-6.8-0.8	
DVP-EF-7007H	(EPM-70H-6.0-0.7)	EPM-IT-80-6.8-0.8	
DVP-EF-7005N	(EPM-70N-5.1-0.5)	EPM-IE-80-6.8-0.8	
DVP-EF-7007N	(EPM-70N-6.0-0.7)	DVP-KMT-8240 + KMT-15xLL	(EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)
DVP-EF-7010N	(EPM-70N-6.5-1.0)	EPM-T-IP-80-13.6-0.8 + KMT-15xLL	(EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8040D	(EPM-8040D-6.5-1.0)	EPM-T-IT-80-13.6-0.8 + KMT-15xLL	(EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8040N	(EPM-8040N-6.5-1.0)	EPM-T-IE-80-13.6-0.8 + KMT-15xLL	(EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8240D	(EPM-8240D-4.85-1.0)	DVP-DL-70N + TRP-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)
DVP-DF-8240D	(EPM-8240D-7.0-1.0)	DVP-DL-70N + TLK-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)
		KS-EPM-8240XH-6.0-1.0	

Pressure plate with tube:

TRP-45xLL (EPT-45xLL-PA)
 BTRP-45xLL (EPT-B-45xLL-PA)
 TWP-8040xLL (EPT-8040xLL-PA)
 TLK-45xLL (EPT-45xLL-PP)
 HTLK-45xLL (EPT-O-45xLL-PP)
 TLK-75xLL (EPT-75xLL-PP)

Termination bar:

EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)
 EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)
 EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)
 EDF-BAR F-TUBE + KMT-15xLL (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)
 EBS-xxxxx-25-7.1-1.25 (BC-EBS-xxxxx-25-7.1-1.25)

Substrate:

Steel S280		EN 10346
Steel S320		EN 10346
OSB/3	$\rho_{min} = 550 \text{ kg/m}^3$	EN 12369-1
Chipboard	$\rho_{min} = 600 \text{ kg/m}^3$	EN 12369-1
Plywood	$\rho_{min} = 400 \text{ kg/m}^3$	EN 12369-2
Timber, class $\geq$ C24	$\rho_{min} = 350 \text{ kg/m}^3$	EN 338

Installation data:


Max. drilling capacity in steel substrate:	2 x 1,25 mm
Head type:	Bugle Head / Raised Bugle Head
Recess:	PH2 / TX25
Fixing in steel substrate:	Min. 20 mm of the screw fixed through the steel sheet
Fixing in wooden and wood-based substrate:	Full thread through the substrate or minimum embedment depth
Installation force of installation tool in:	
- steel substrate	15 kg
- in wooden and wood-based substrate:	30 kg
Installation tool speed:	2000 - 2500 rpm

Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
 ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.3

of European
 Technical Assessment
 ETA-23/0651


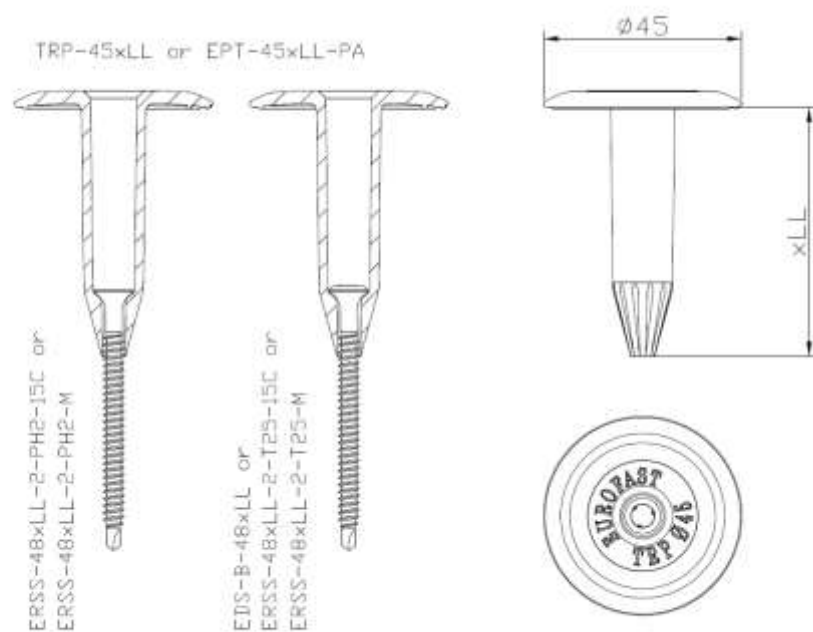


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERS-48xLL-2-T25-15C or ERS-48xLL-2-T25-M)
ERS-48xLL-2-PH2-15C (ERS-48xLL-2-PH2-M)

Annex B.4

of European
Technical Assessment
ETA-23/0651

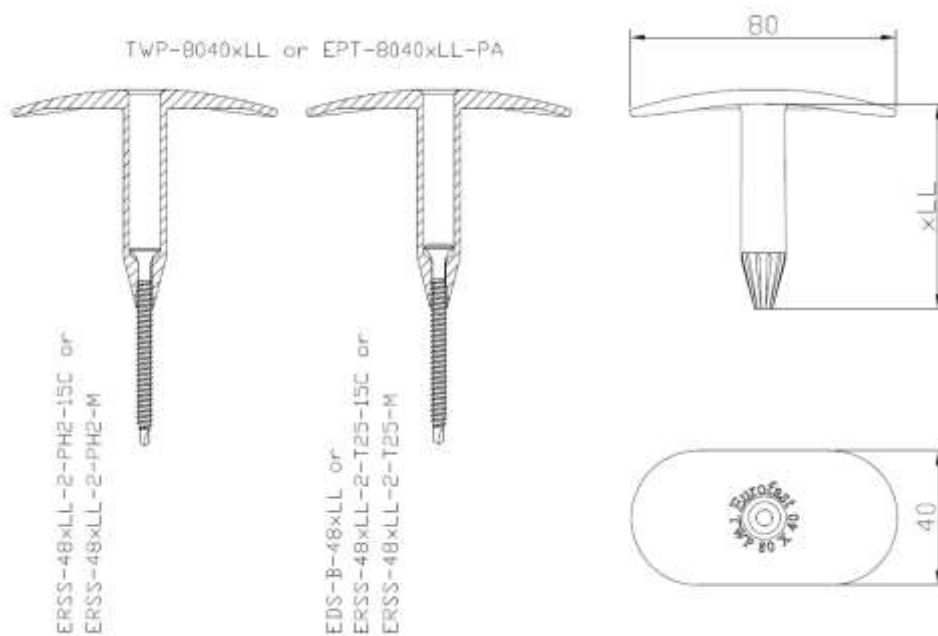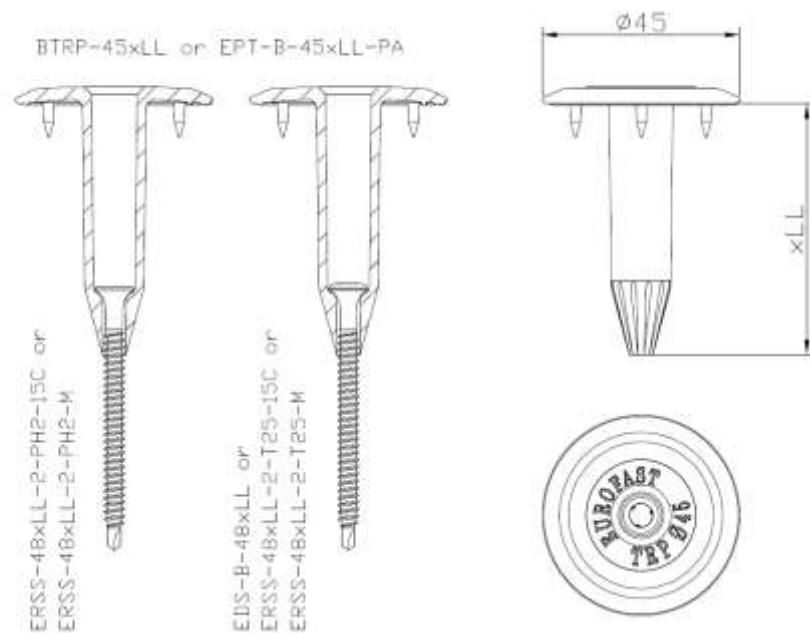


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)


Annex B.5

of European
Technical Assessment
ETA-23/0651

EDF-BAR-F-TUBE + KMT-15xLL or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0
+ EPT-15xLL-PA

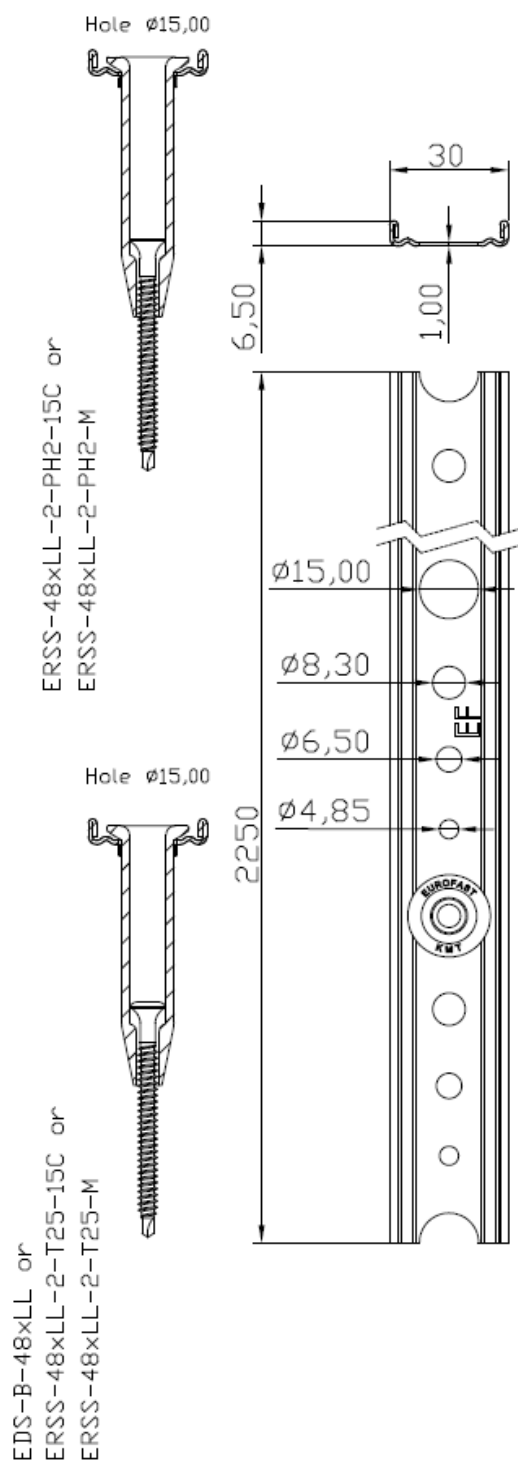

EDF-BAR-F-TUBE or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0

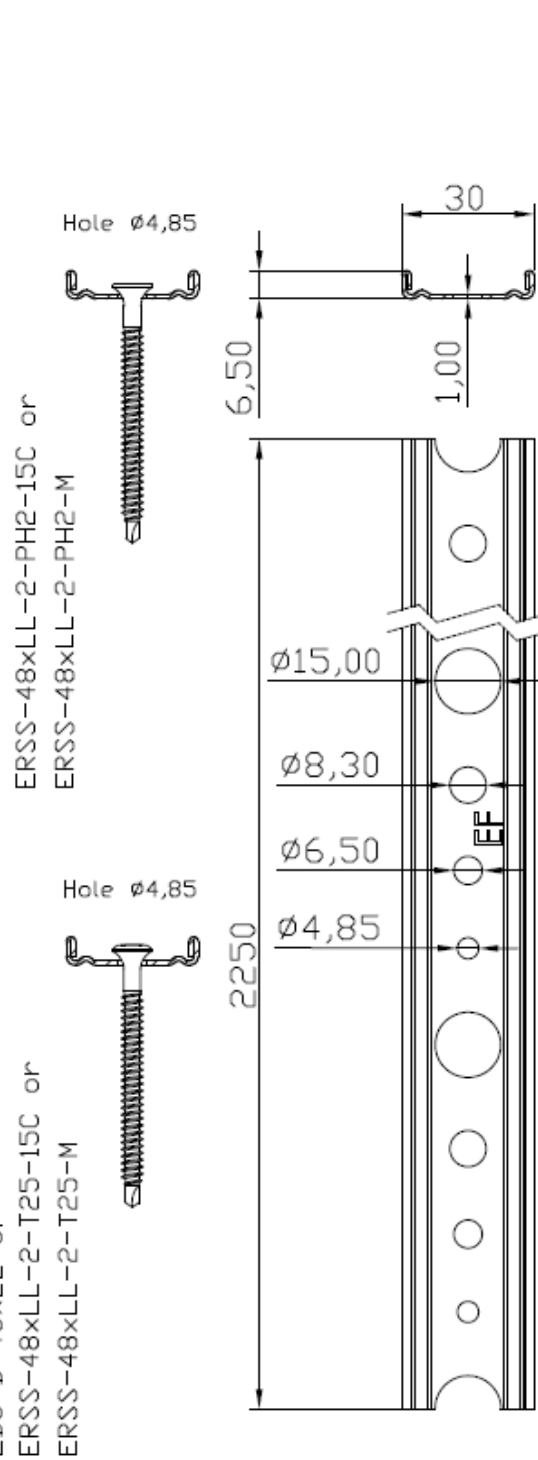


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)


Annex B.6

of European
Technical Assessment
ETA-23/0651

EDF-BAR F or
ETM-2250-30-4.8-8.5-1.0

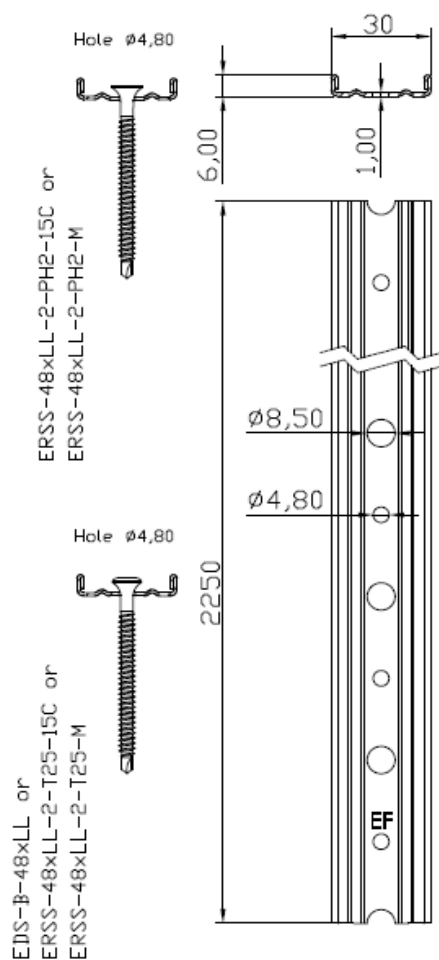

EDF-BAR FB or
ETM-B-2250-30-4.8-8.5-1.0


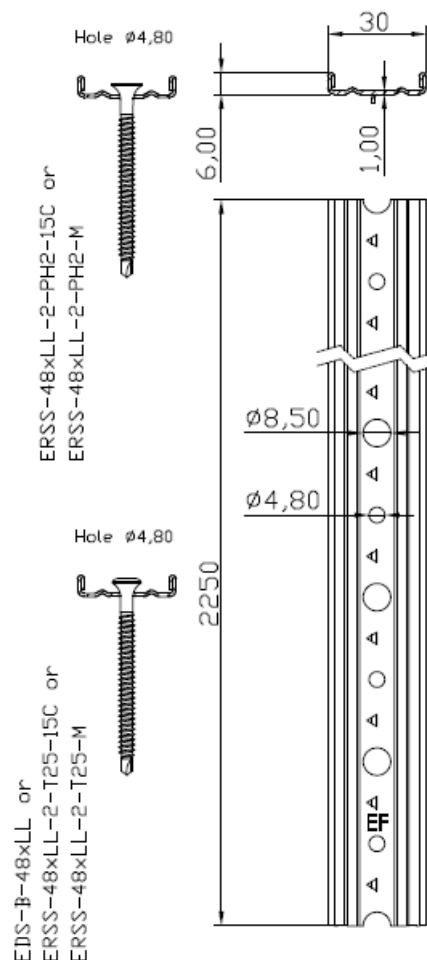


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.7

of European
Technical Assessment
ETA-23/0651

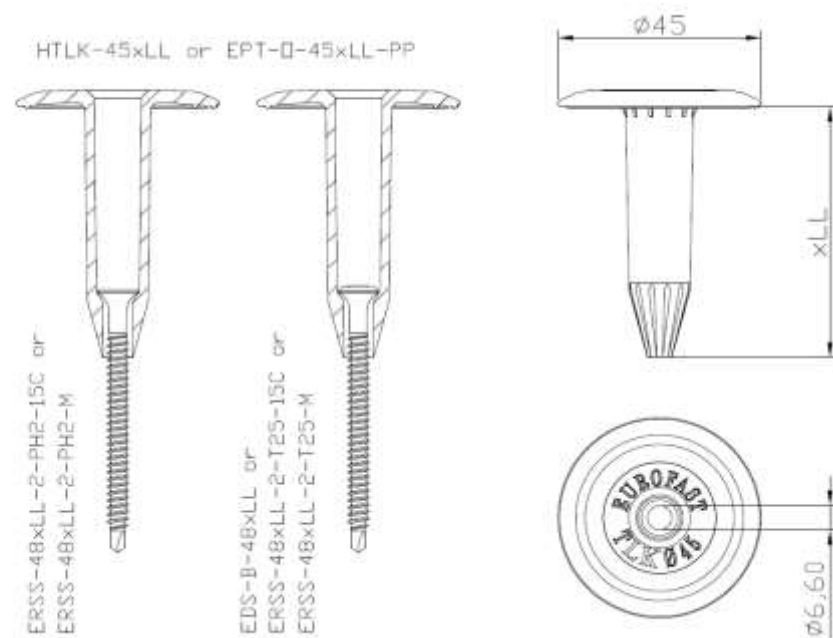
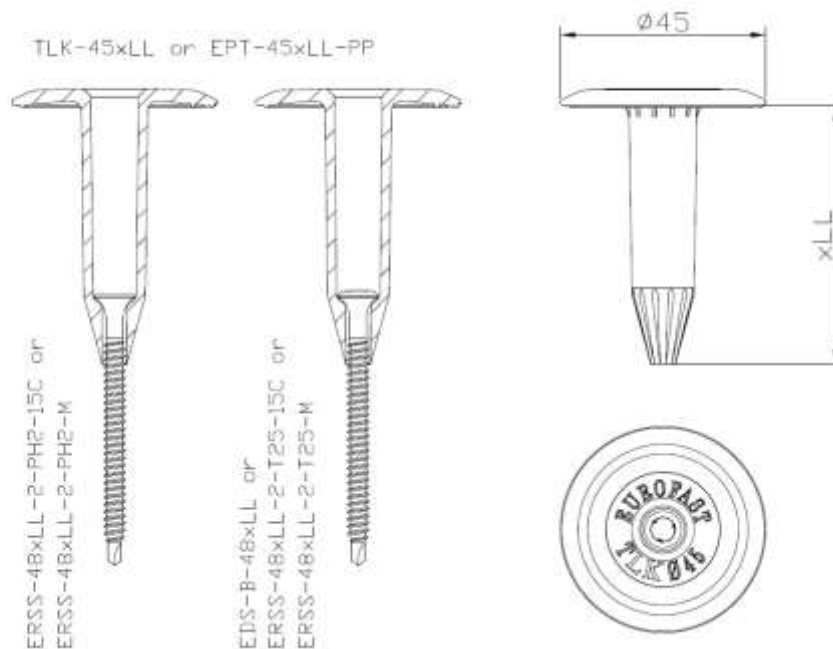


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.8

of European
Technical Assessment
ETA-23/0651

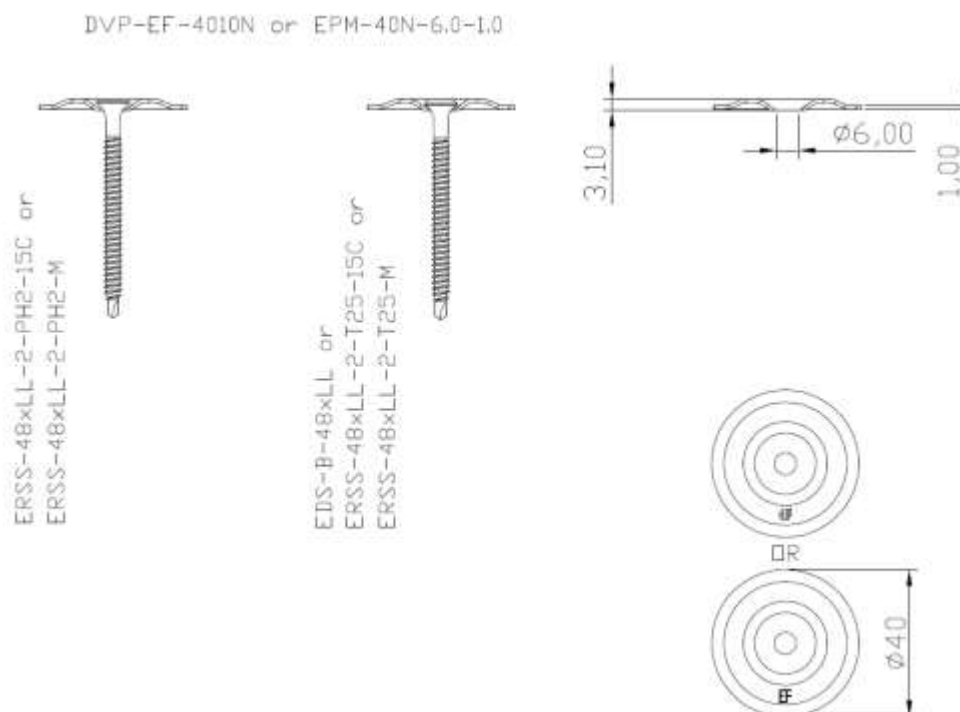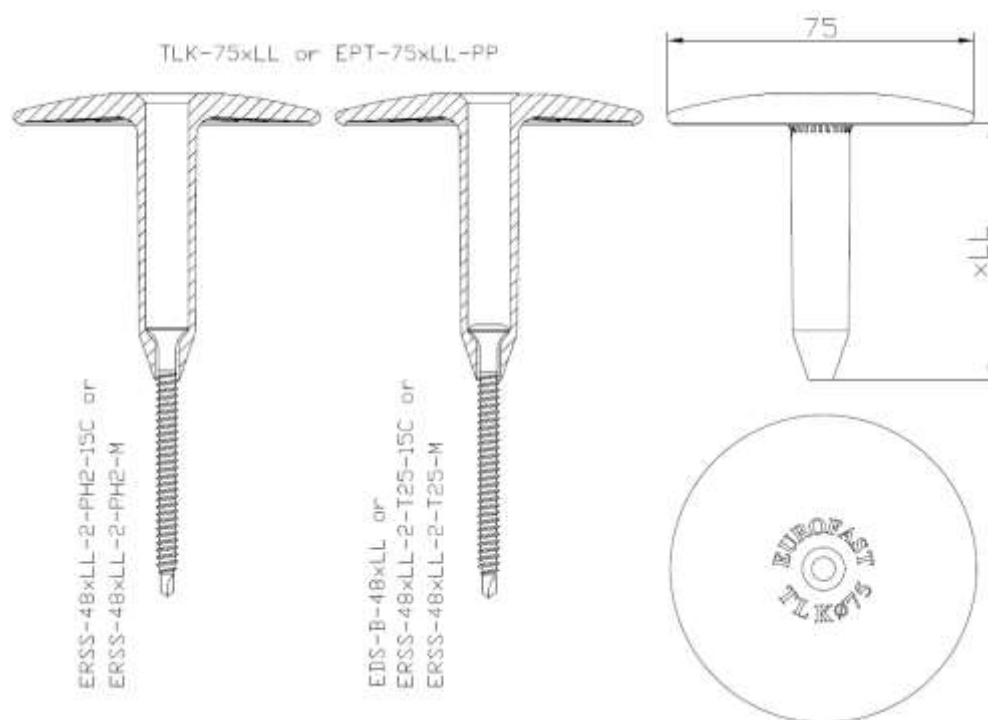


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)


Annex B.9

of European
Technical Assessment
ETA-23/0651

DVP-EF-5010DFR or EPM-50D-4.85-1.0

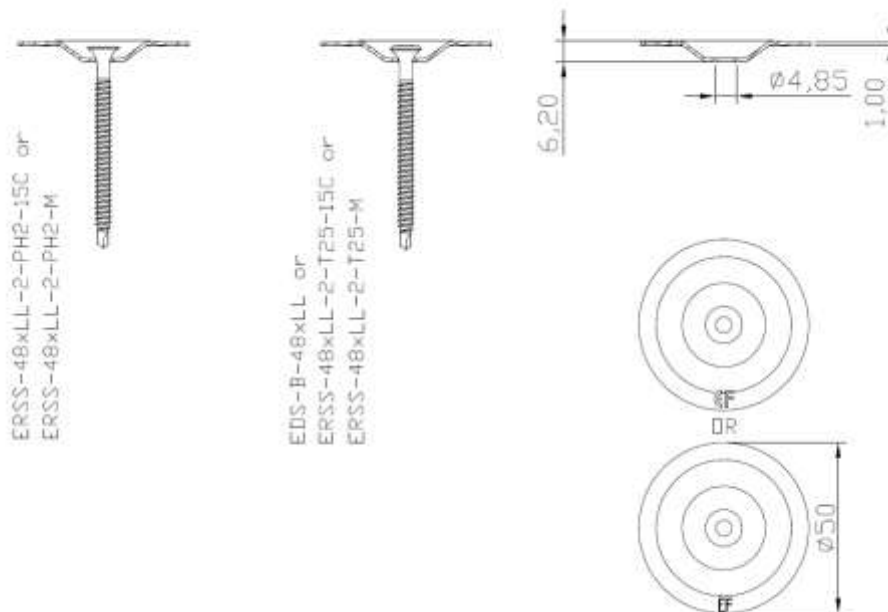

DVP-EF-5010D or EPM-50D-6.3-1.0


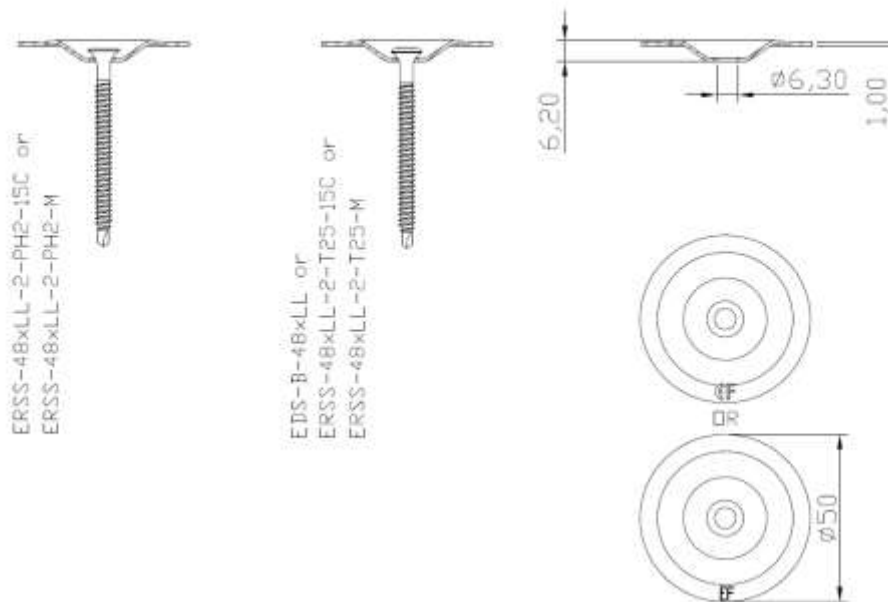


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.10

of European
Technical Assessment
ETA-23/0651

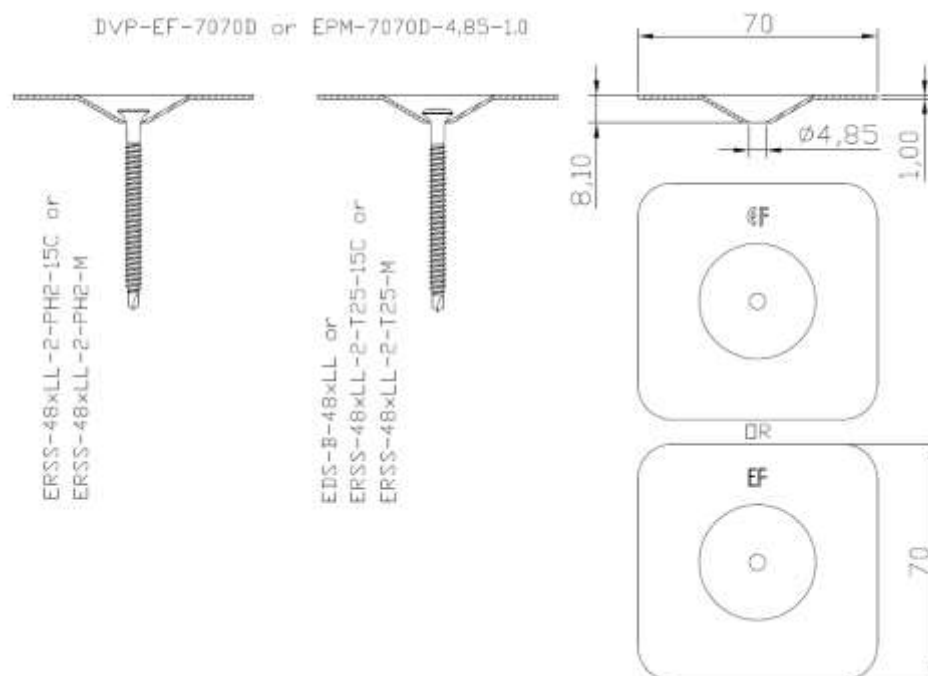
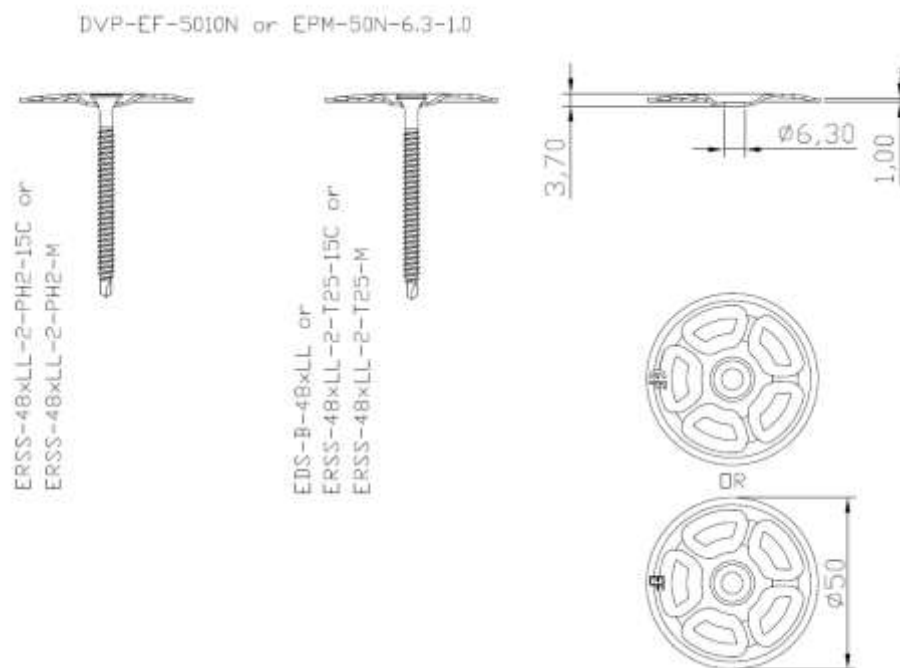


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.11

of European
Technical Assessment
ETA-23/0651

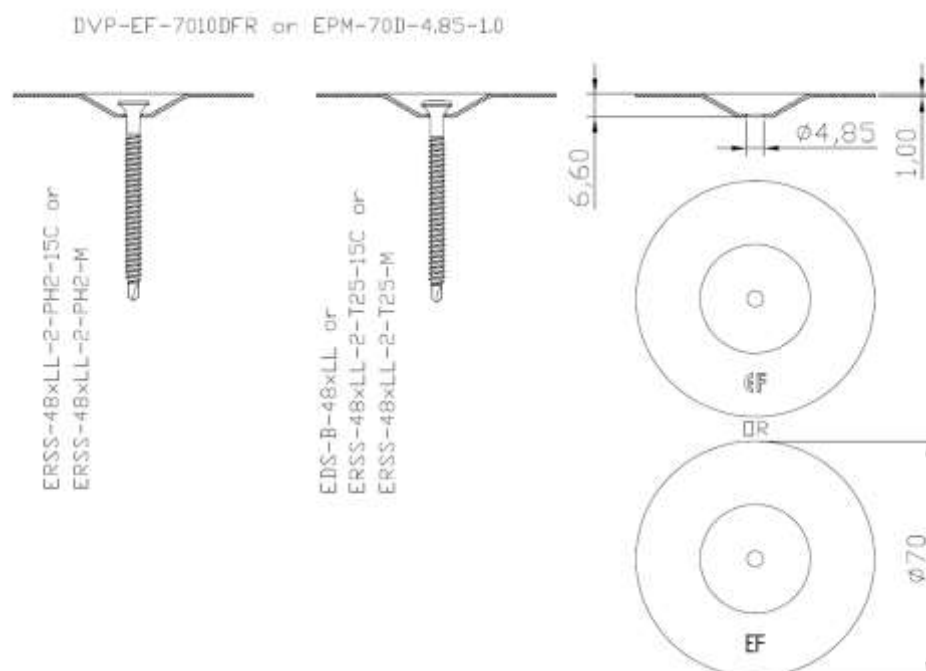
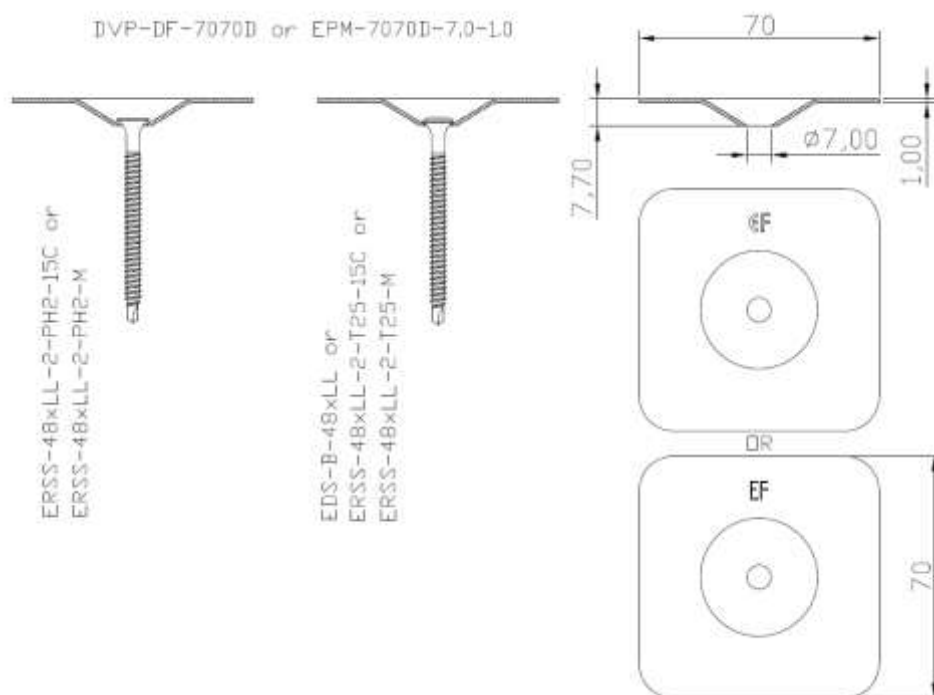


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.12

of European
Technical Assessment
ETA-23/0651

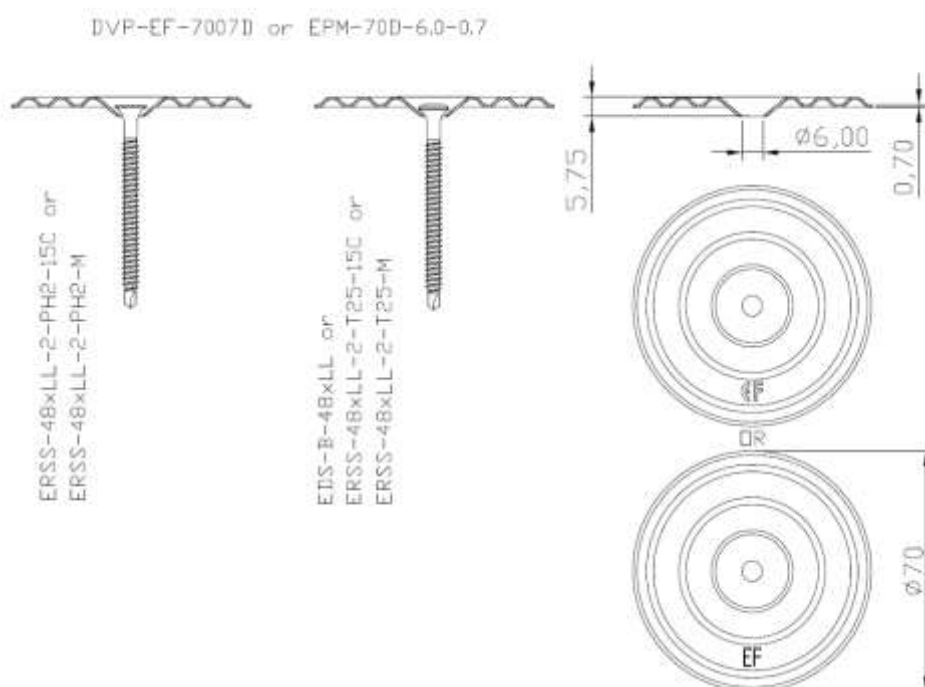
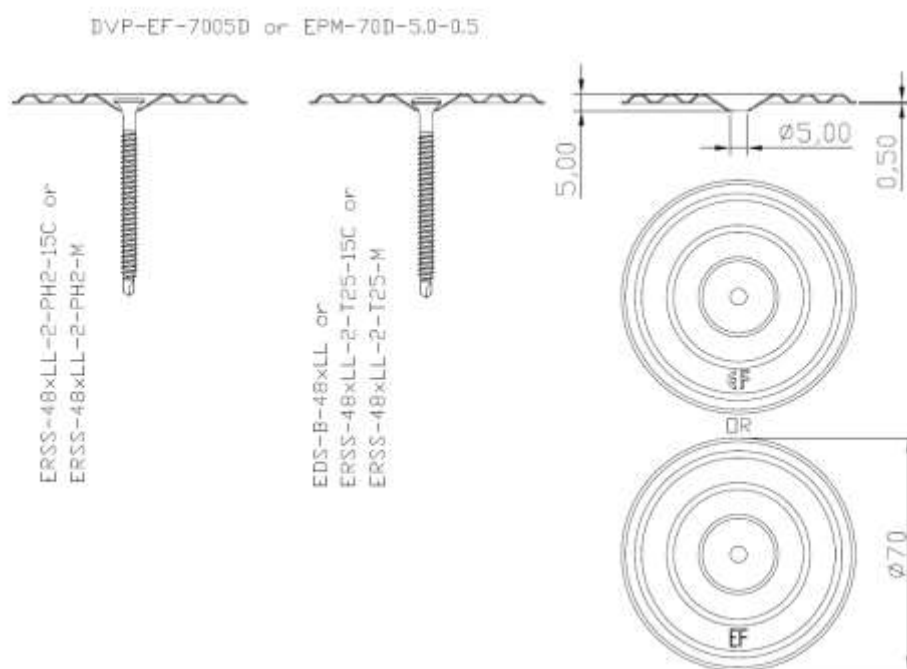


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.13

of European
Technical Assessment
ETA-23/0651

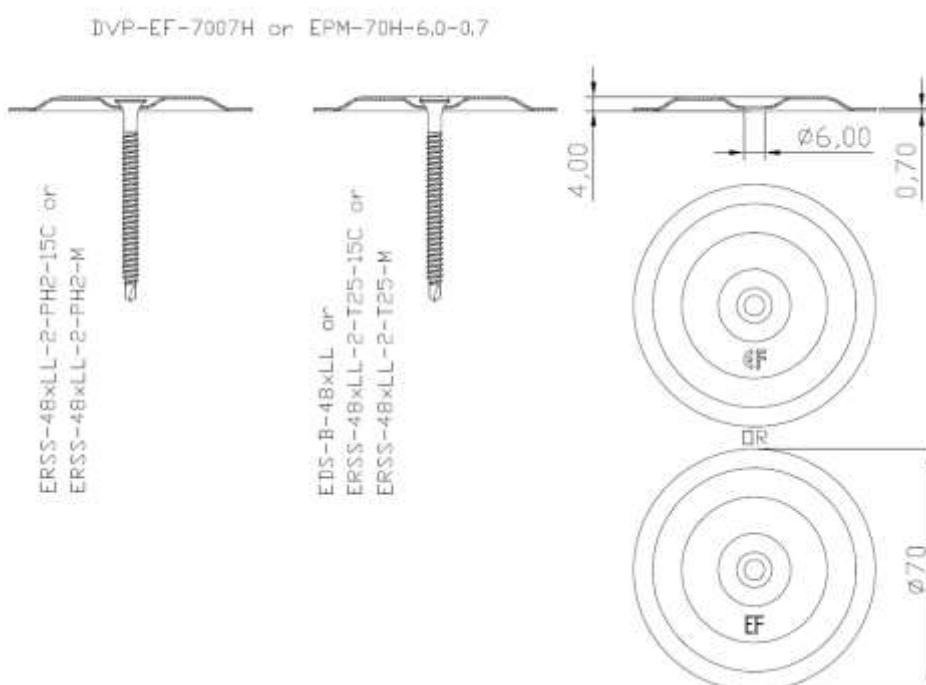
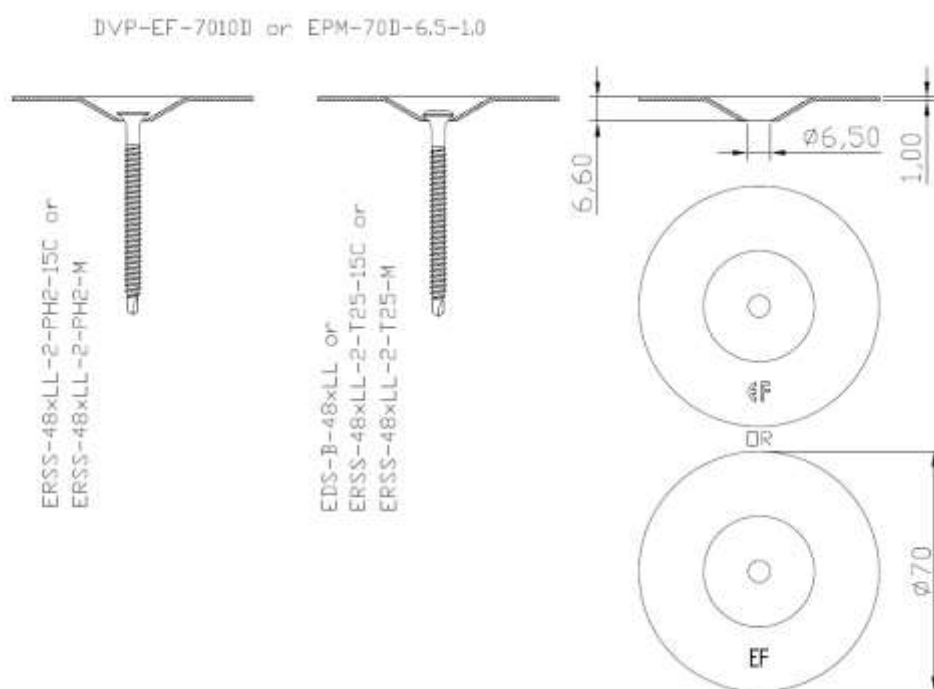


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.14

of European
Technical Assessment
ETA-23/0651

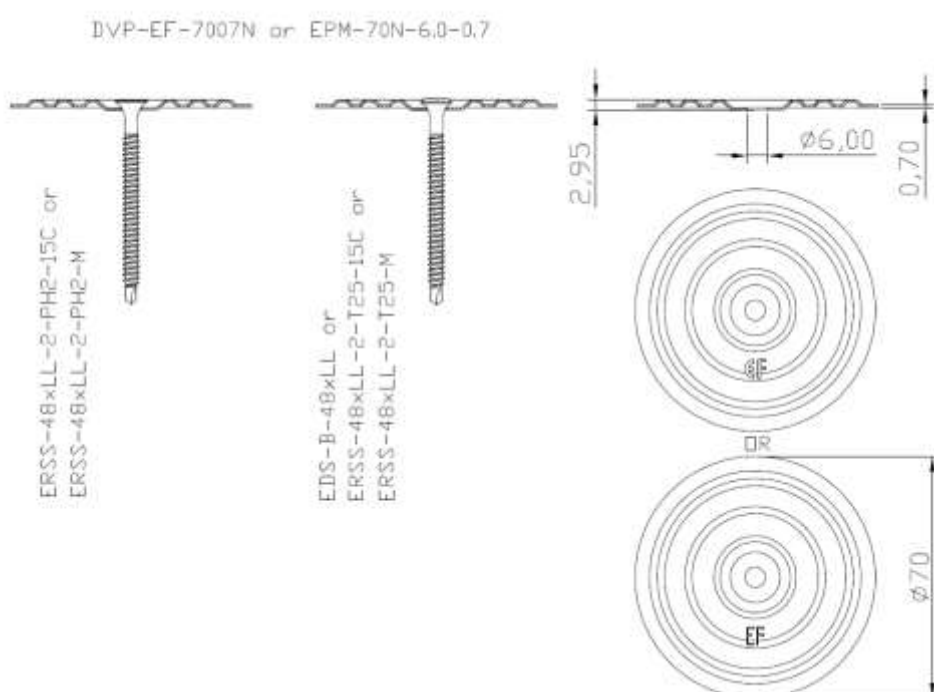
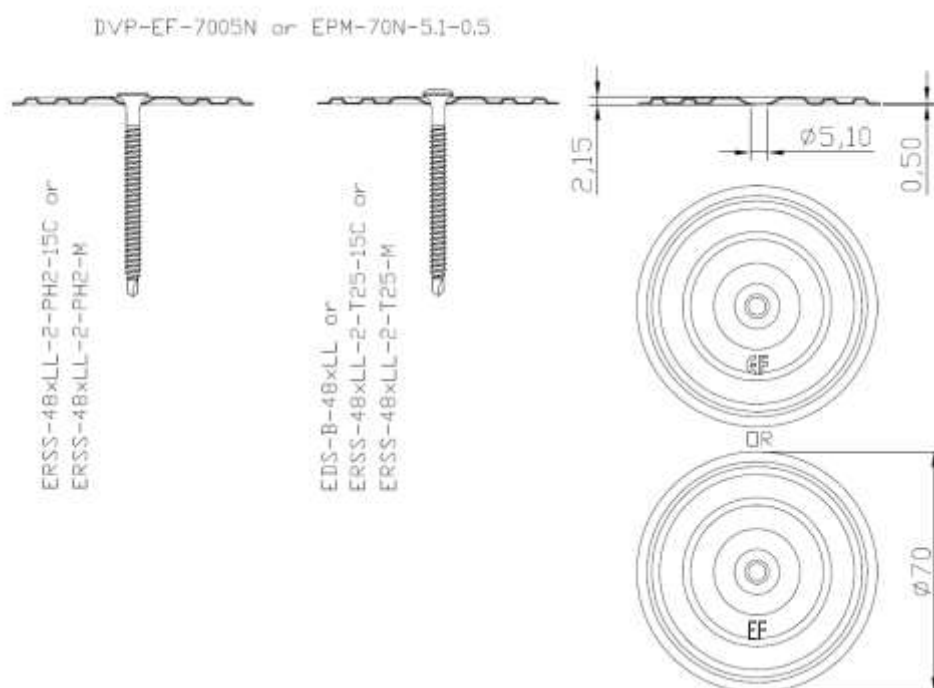


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.15

of European
Technical Assessment
ETA-23/0651

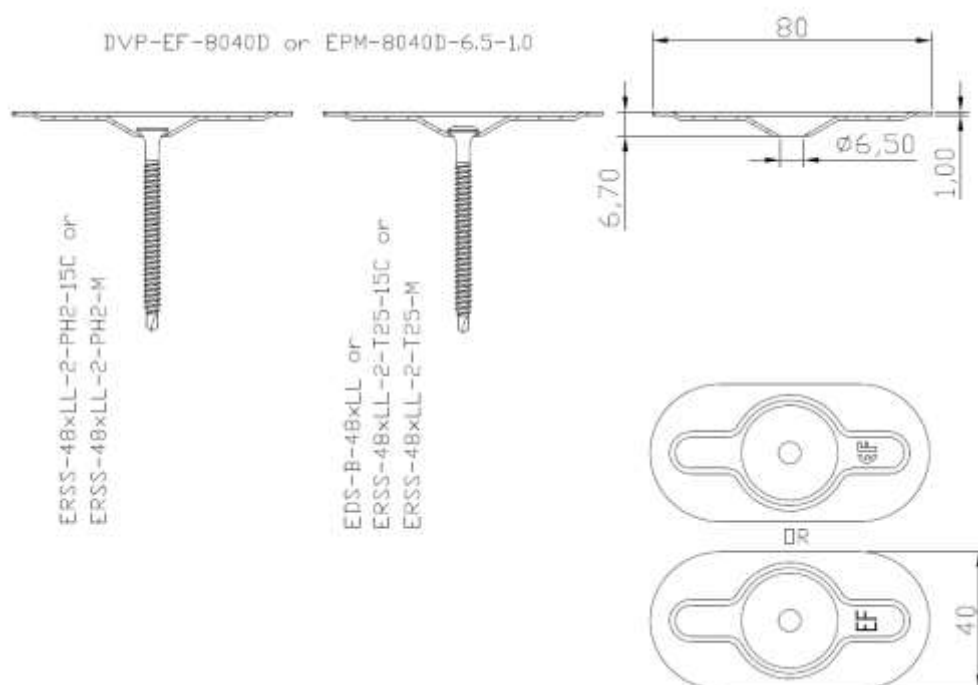
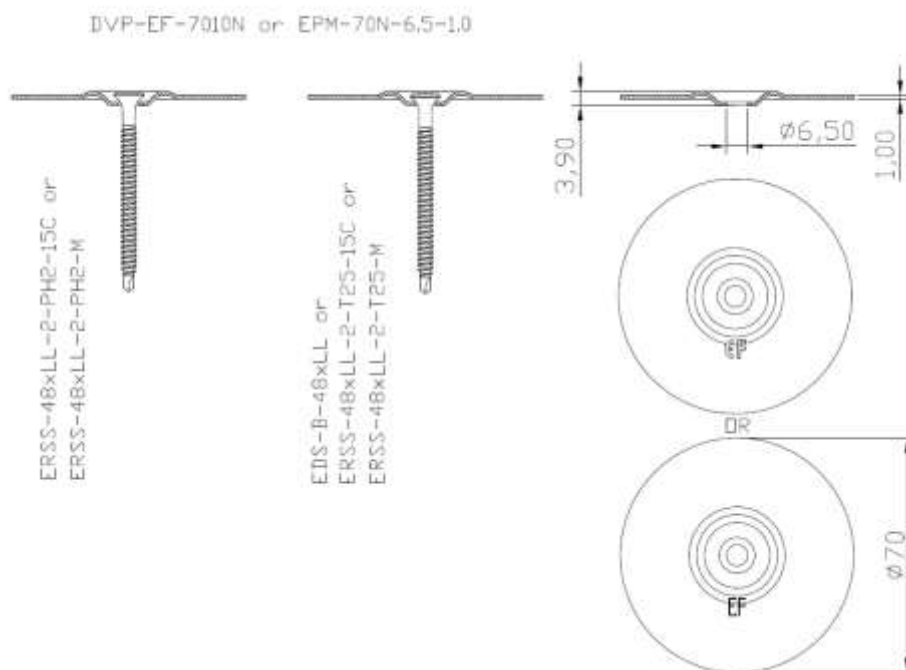


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.16

of European
Technical Assessment
ETA-23/0651

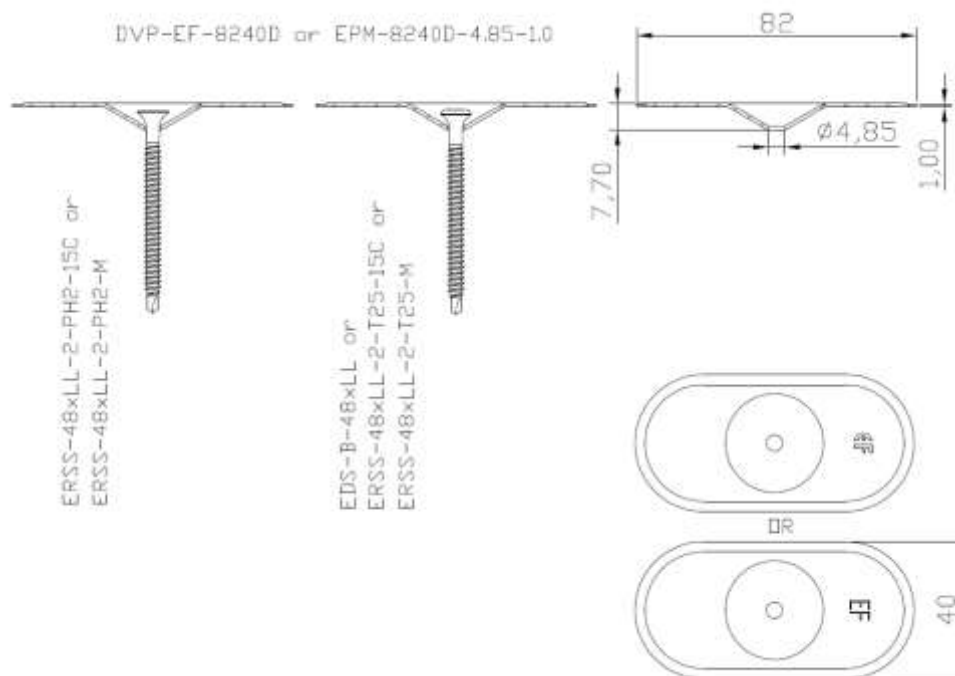
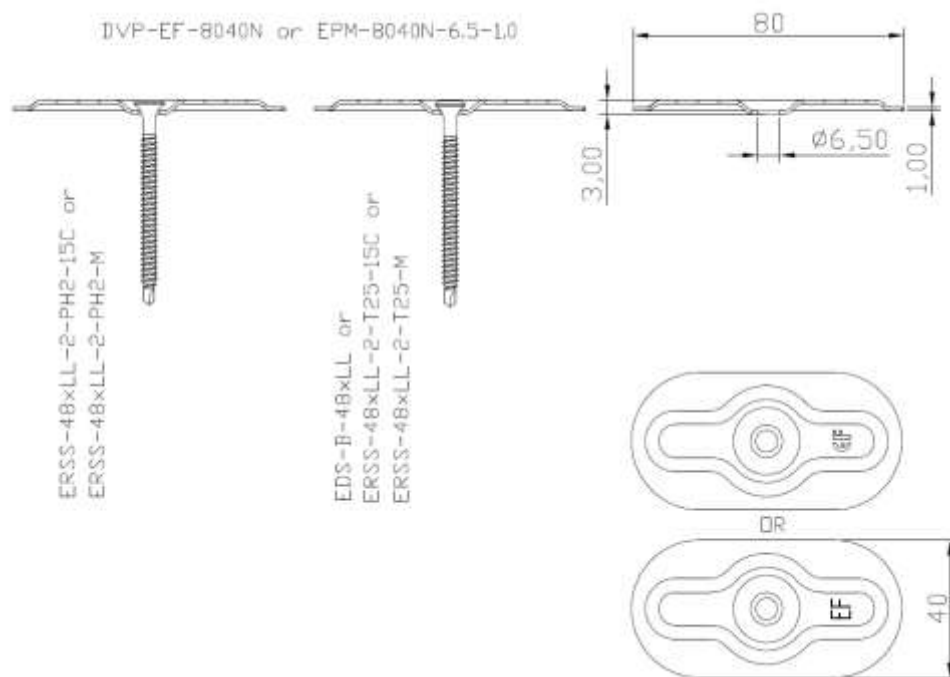


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.17

of European
Technical Assessment
ETA-23/0651

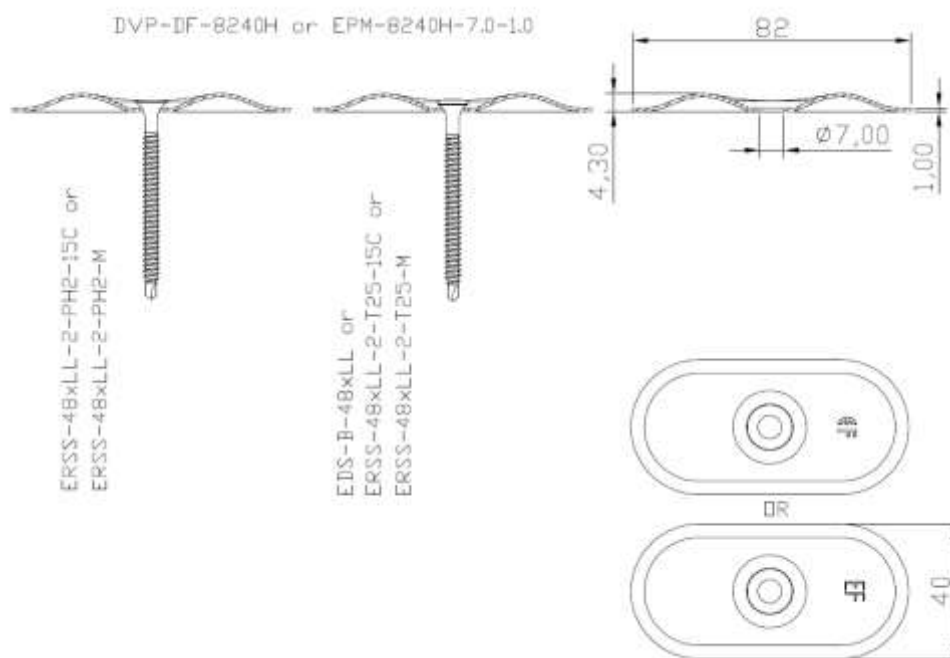
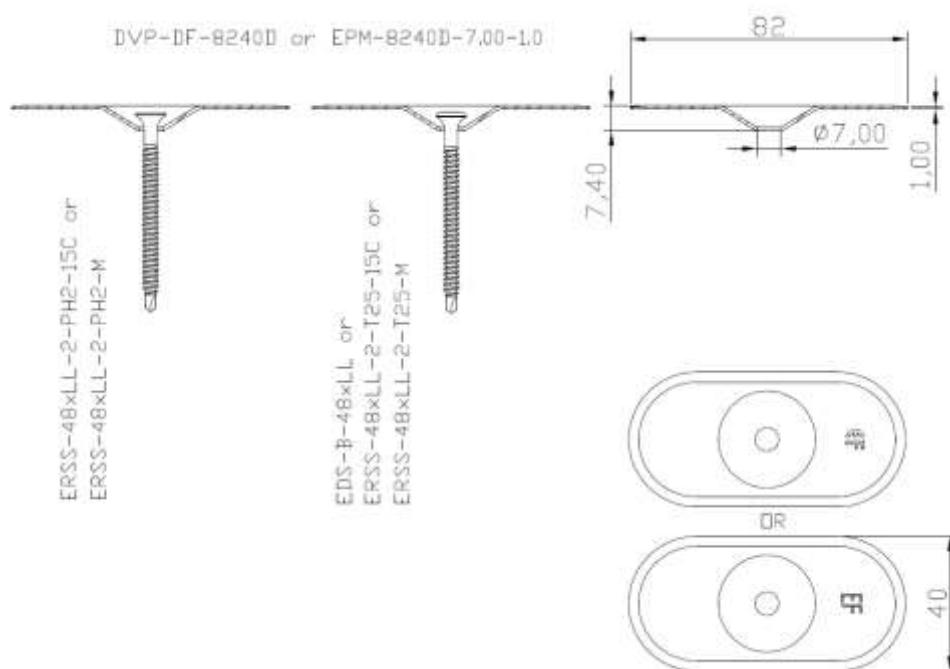


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.18

of European
Technical Assessment
ETA-23/0651

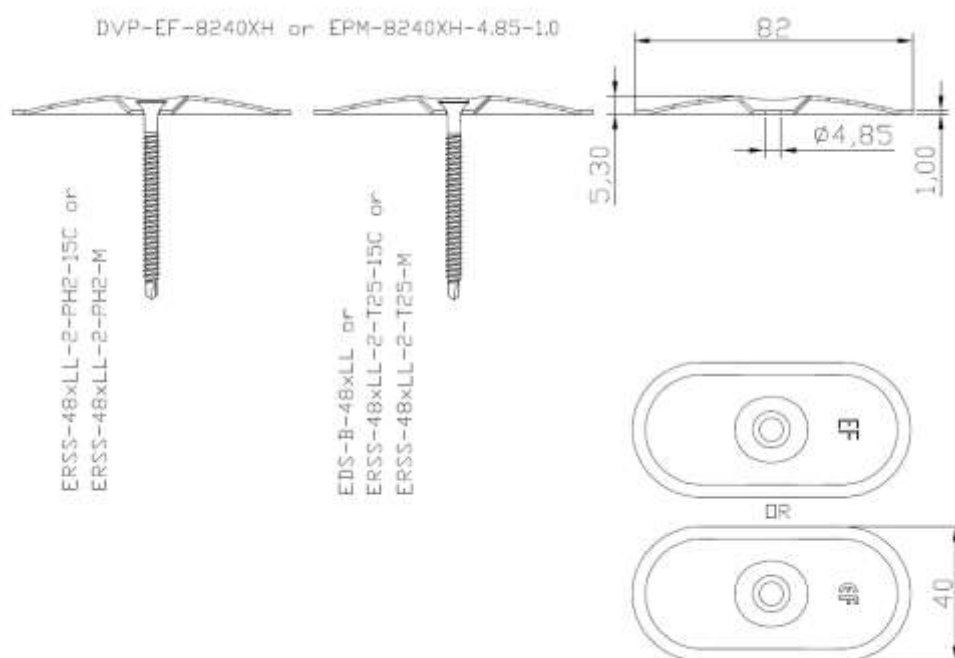
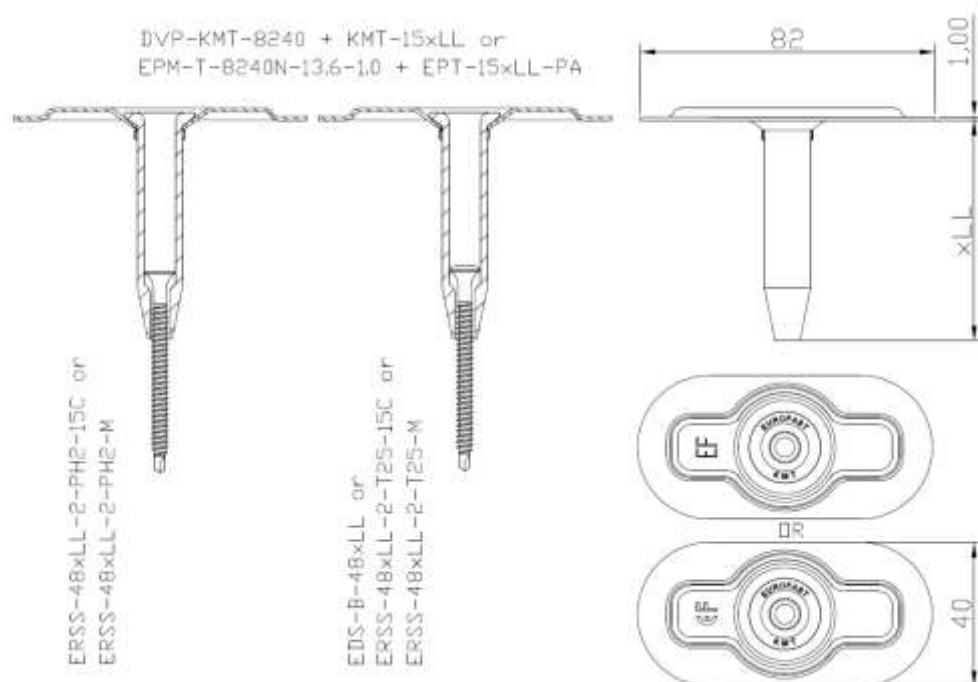


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.19

of European
Technical Assessment
ETA-23/0651

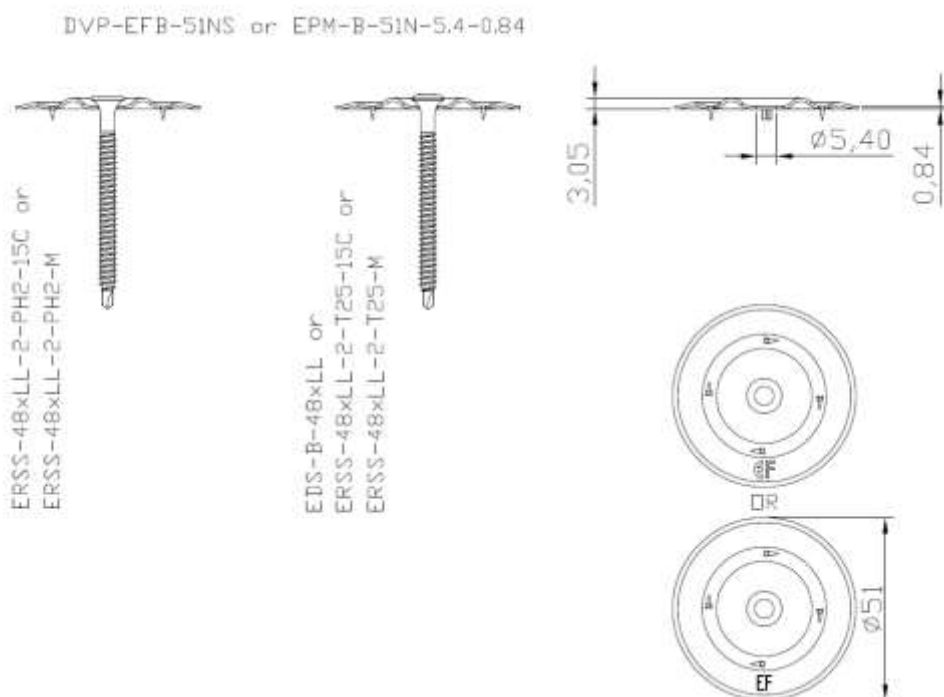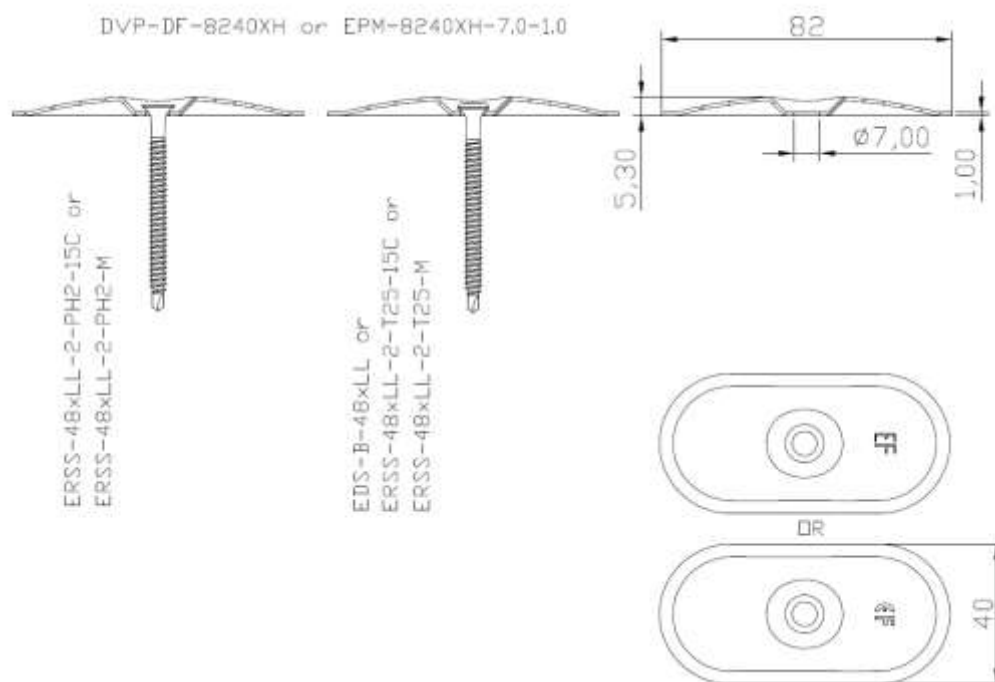


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)


Annex B.20

of European
Technical Assessment
ETA-23/0651

DVP-EF-51N or EPM-51N-6,7-0,84

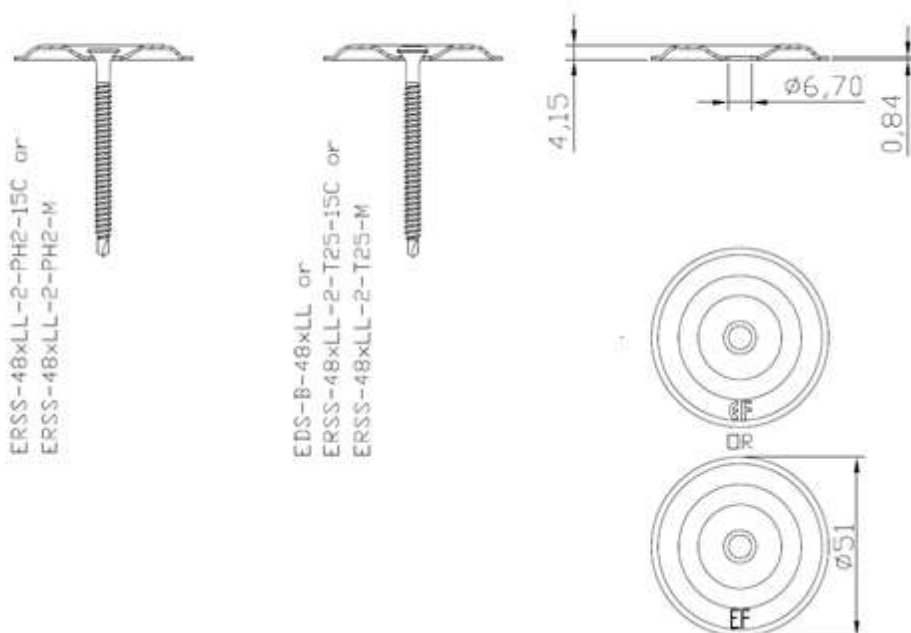

DVP-EFB-8240D or EPM-B-8240D-4,85-1,0


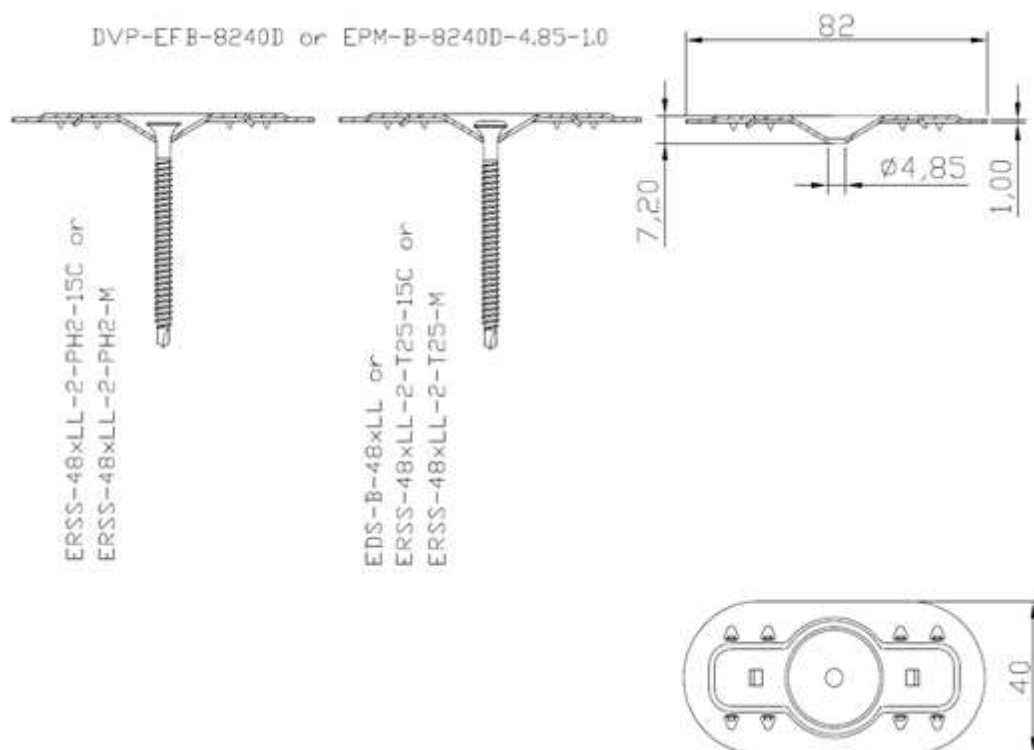


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.21

of European
Technical Assessment
ETA-23/0651

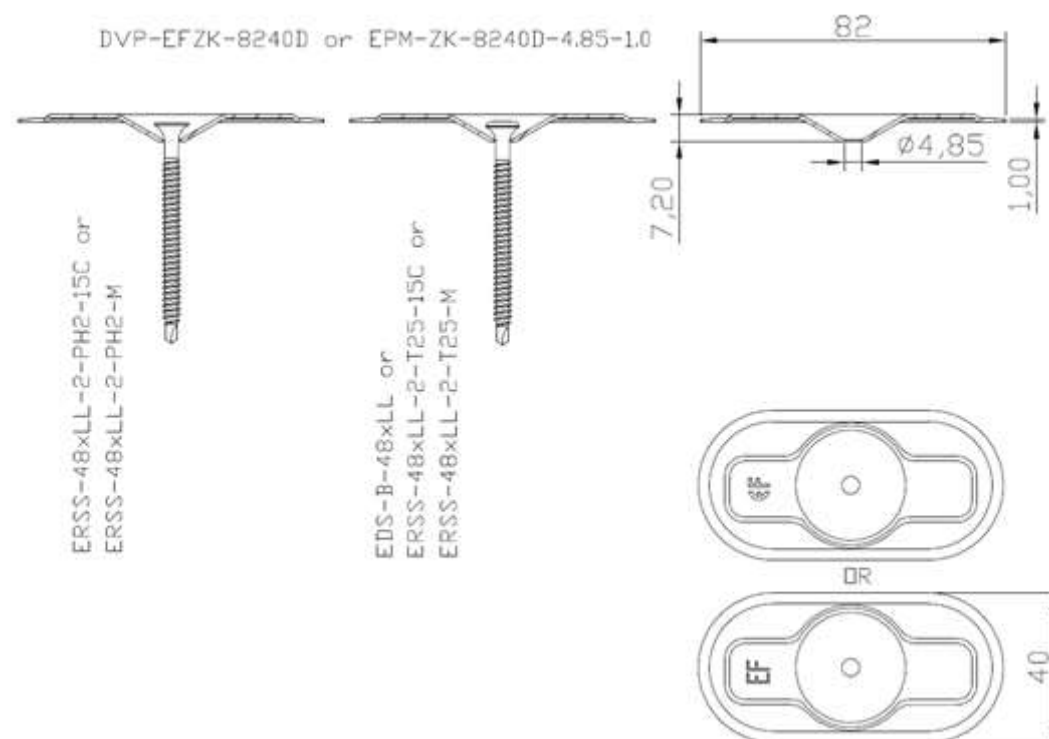
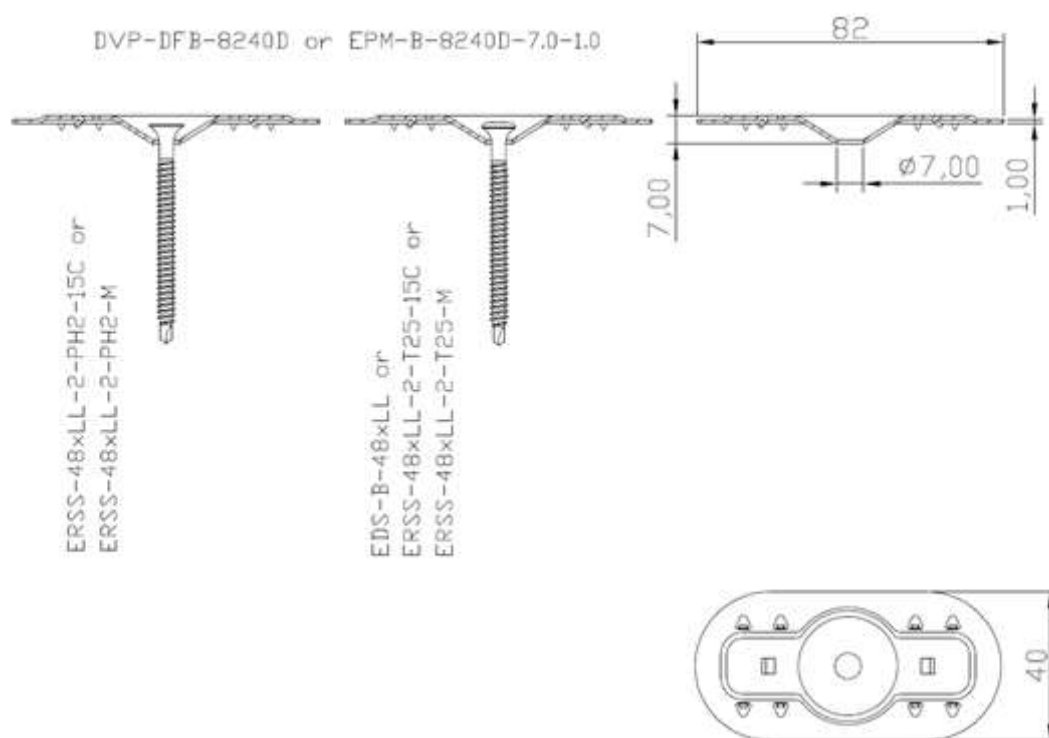


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.22

of European
Technical Assessment
ETA-23/0651

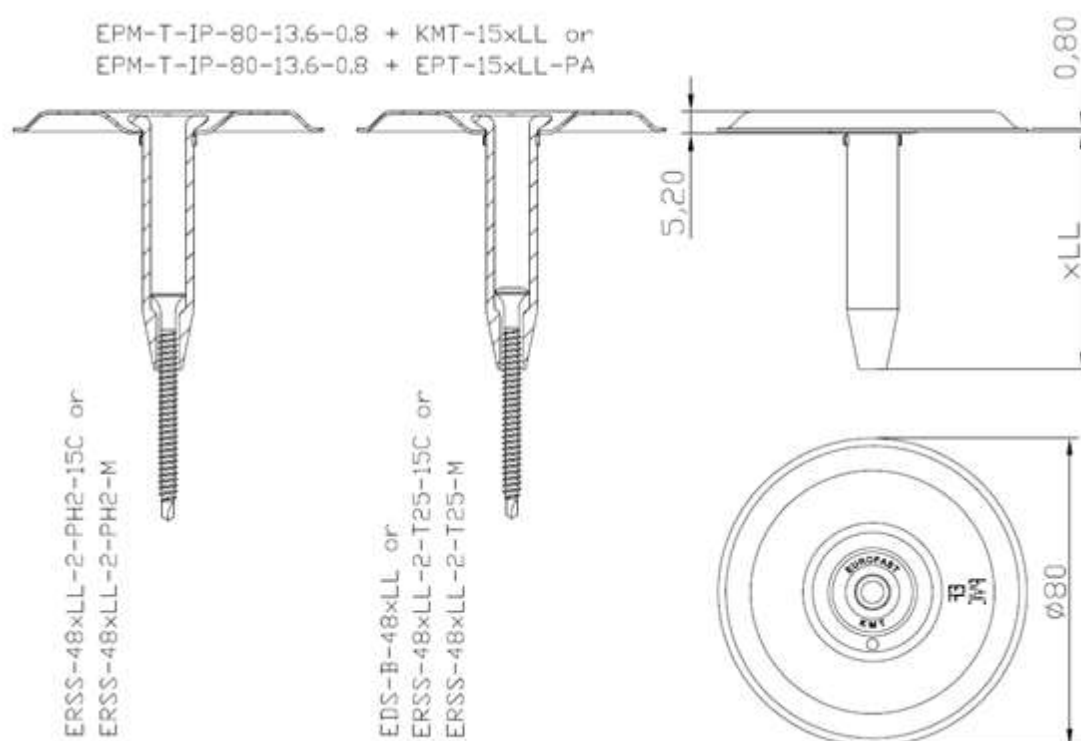
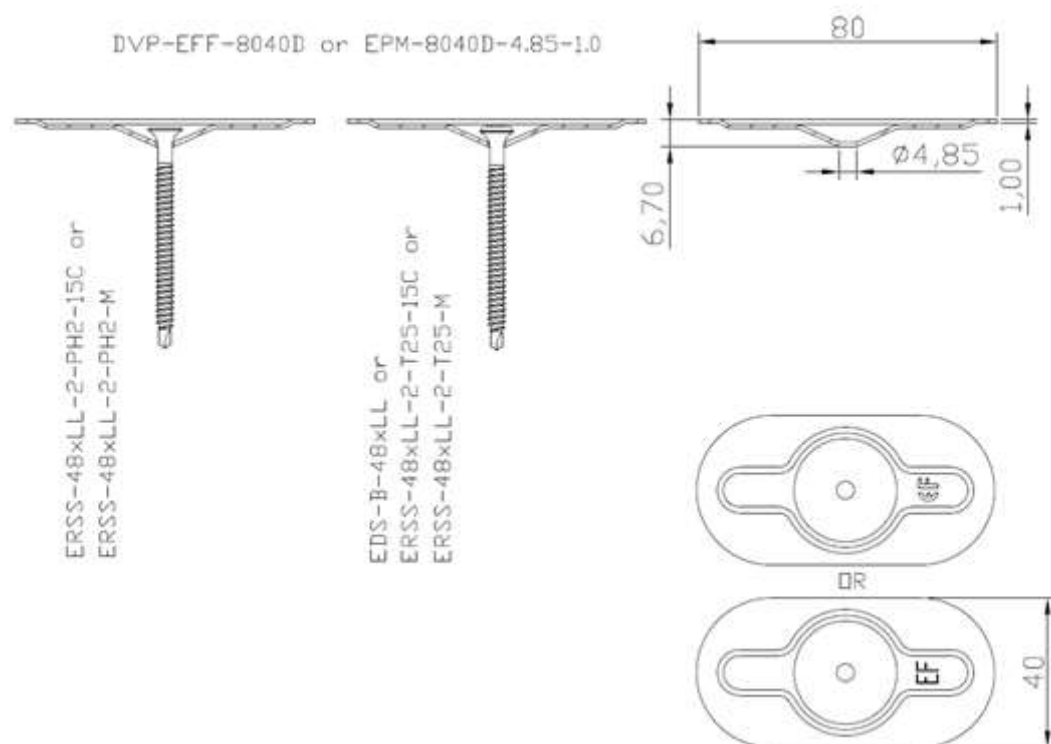


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.23

of European
Technical Assessment
ETA-23/0651

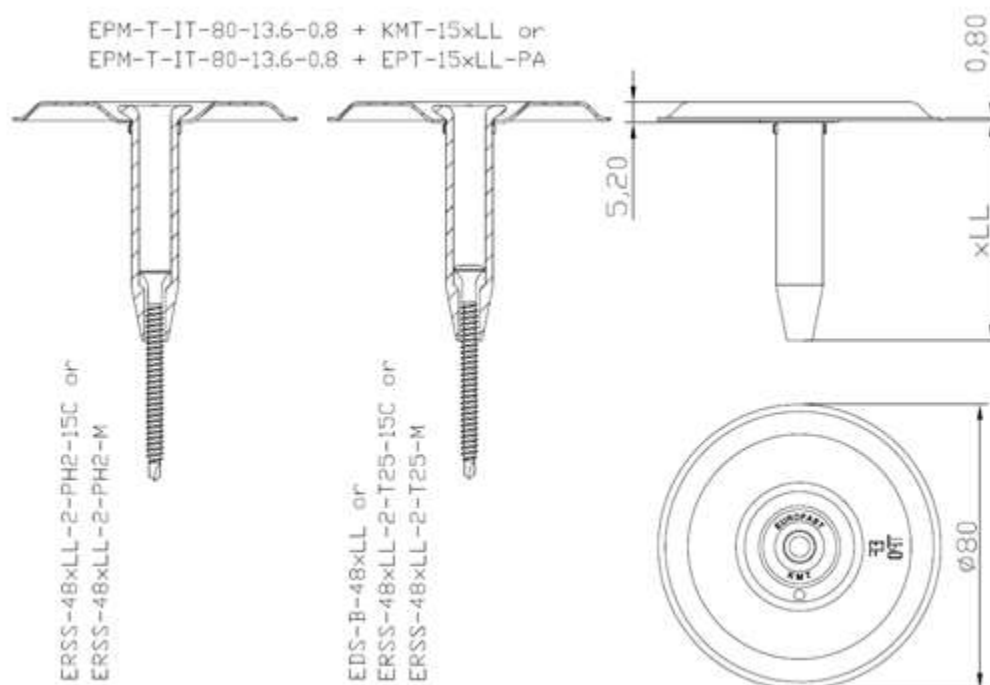
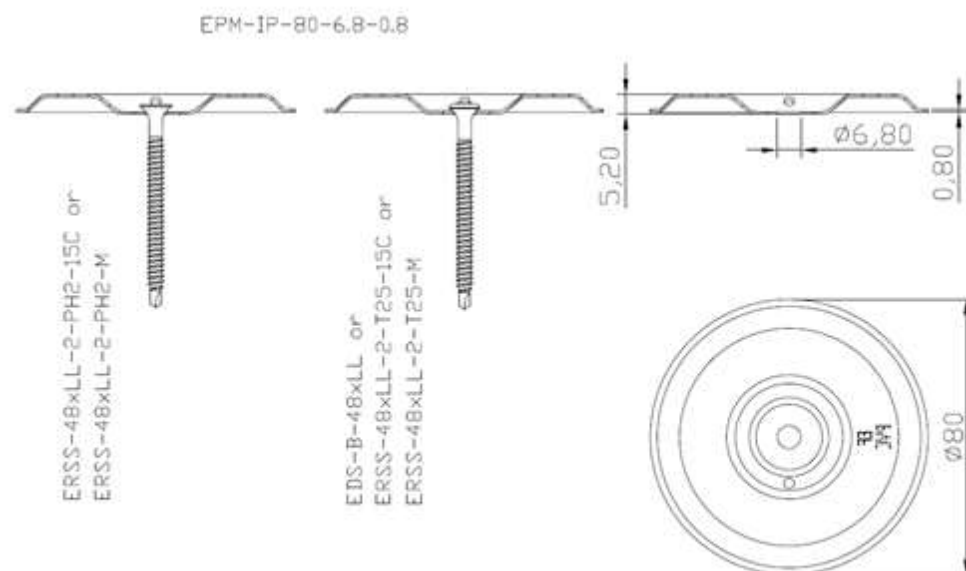


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.24

of European
Technical Assessment
ETA-23/0651

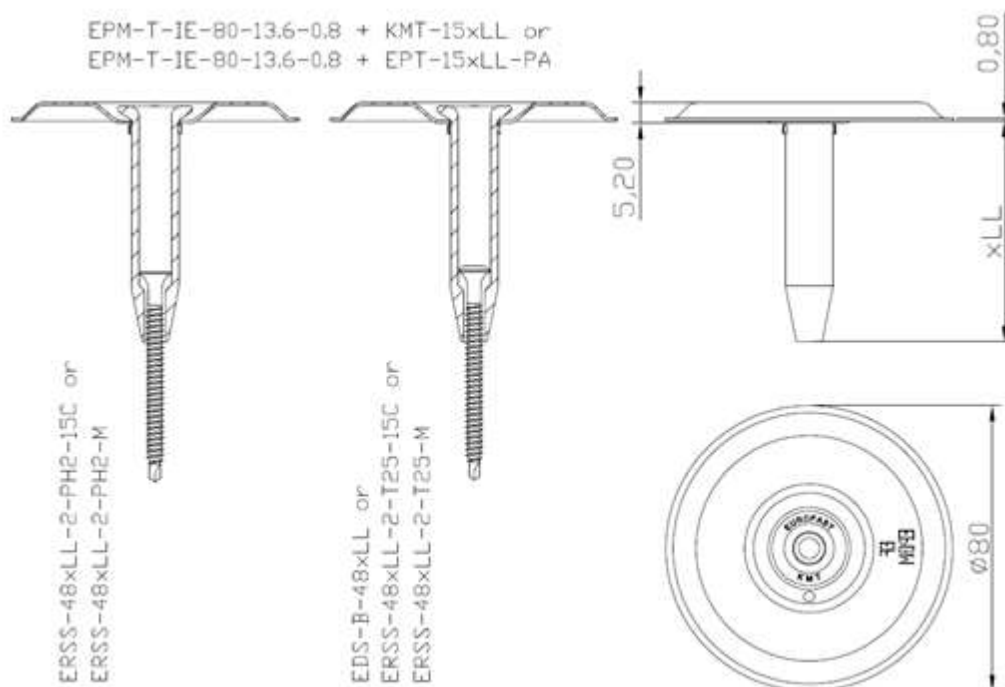
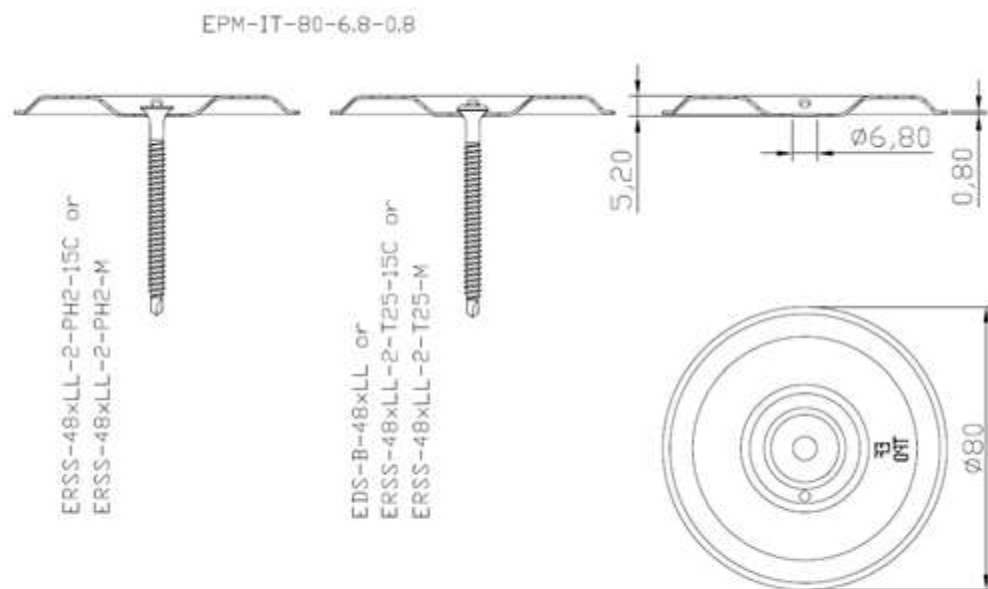


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.25

of European
Technical Assessment
ETA-23/0651

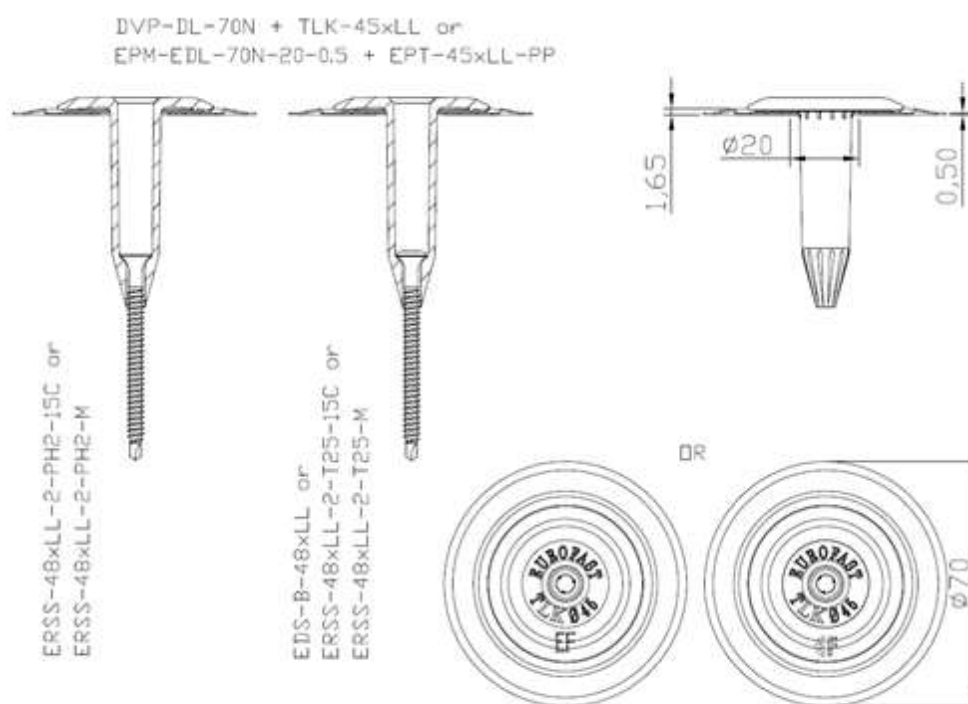
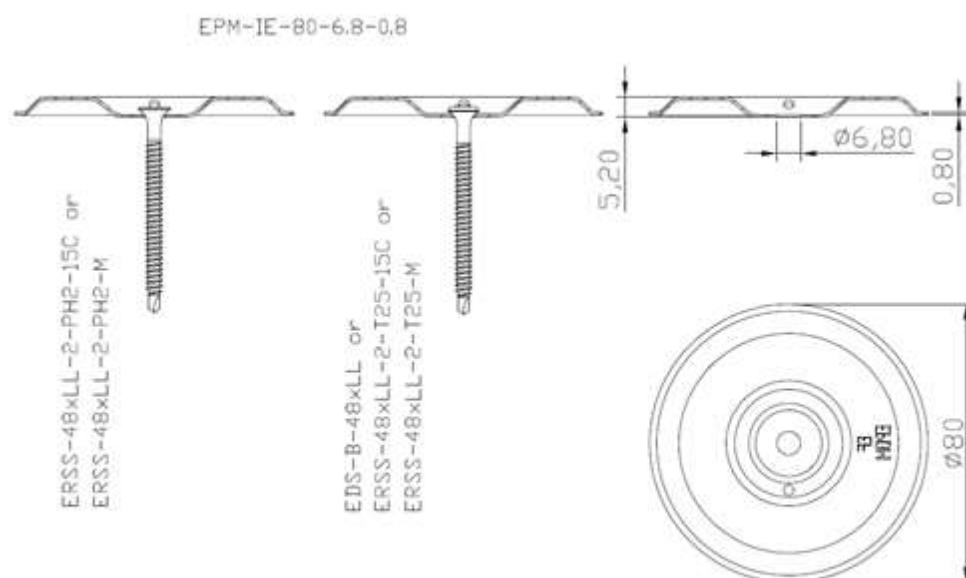


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.26

of European
Technical Assessment
ETA-23/0651

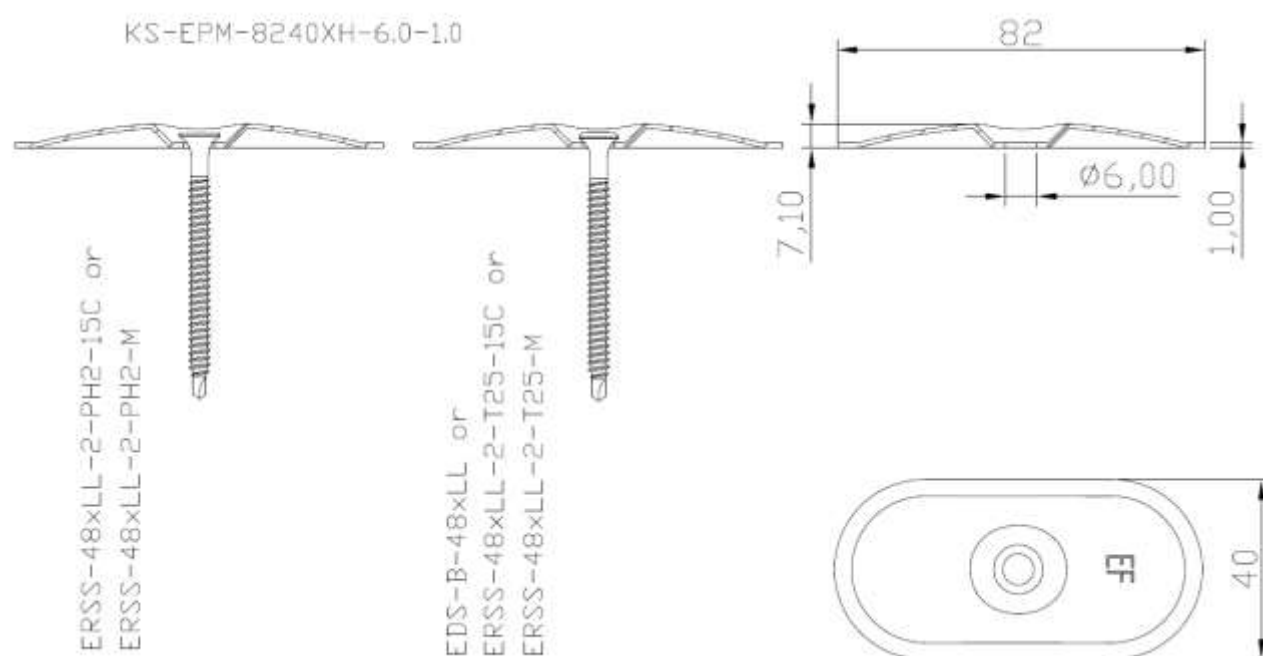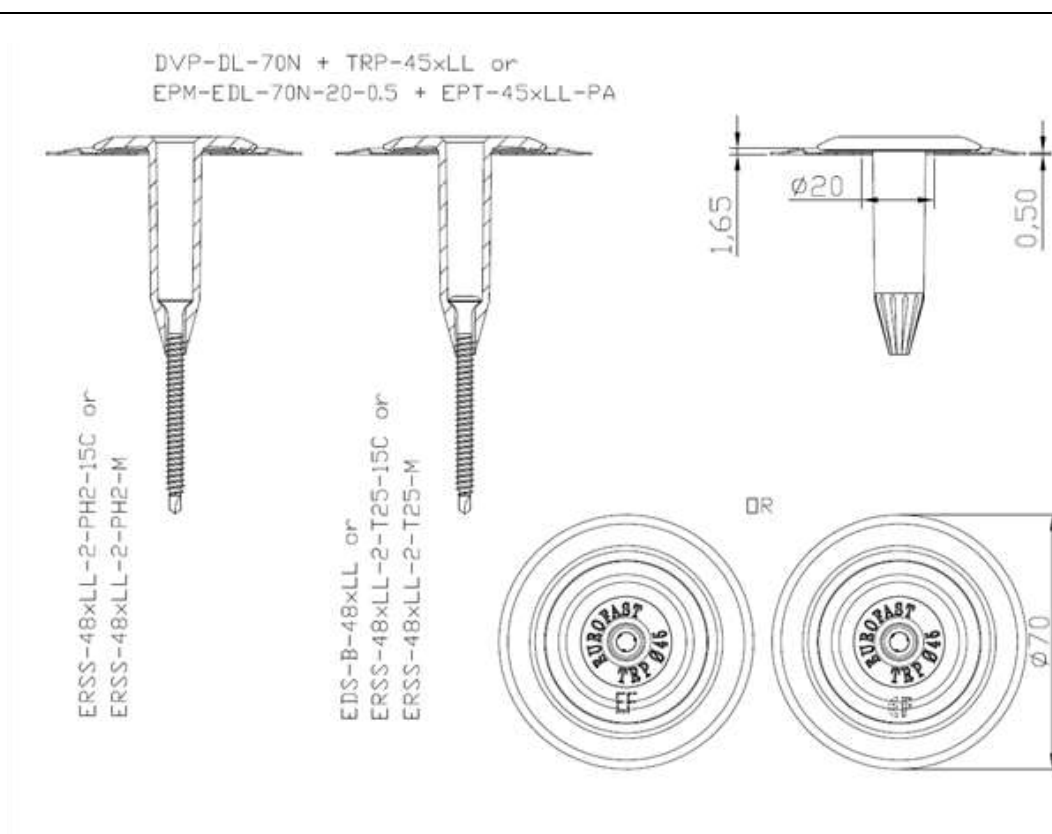


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.27

of European
Technical Assessment
ETA-23/0651

EBS-xxxxx-25-7.1-1.25 or
BC-EBS-xxxxx-25-7.1-1.25

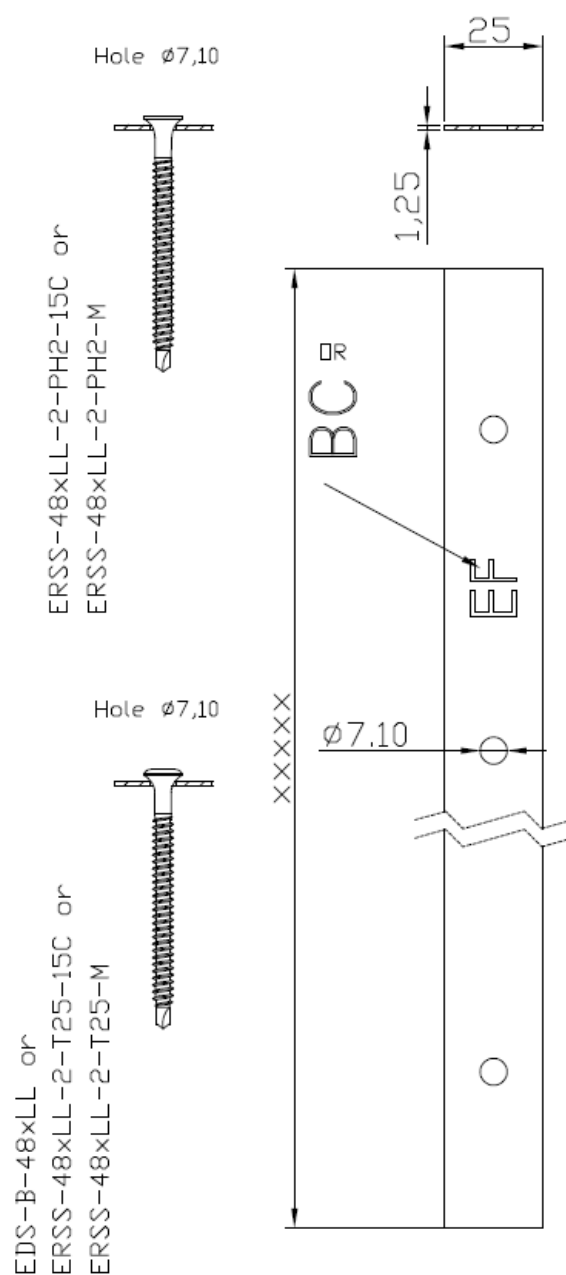


Eurofast Flat Roof Fasteners

EDS-B-48xLL (ERSS-48xLL-2-T25-15C or ERSS-48xLL-2-T25-M)
ERSS-48xLL-2-PH2-15C (ERSS-48xLL-2-PH2-M)

Annex B.28

of European
Technical Assessment
ETA-23/0651

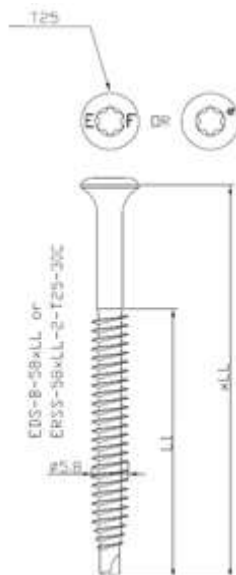

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)									
	Steel S320GD *								
t [mm]	0,50	0,60	0,63	0,70	0,75	0,80	0,88	1,00	1,25
EDS-B-58xLL (ERSS-58xLL-2-T25-30C)	0,94	1,25	1,25	1,72	1,91	2,35	2,35	2,57	3,14

* when using steel S280GD, values must be reduced by 8%

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)							
	OSB/3			Chipboard	Plywood		Timber C24
t [mm]	18	21	25	19	18	21	24
EDS-B-58xLL (ERSS-58xLL-2-T25-30C)	1,29	1,51	1,62	1,54	1,39	1,51	1,48

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	DVP-EFB-51NS (EPM-B-51N-5.4-0.84)	DVP-EF-51N (EPM-51N-6.7-0.84)	EPM-IP-80-6.8-0.8
	-	-	EPM-IT-80-6.8-0.8
	-	-	EPM-IE-80-6.8-0.8
EDS-B-58xLL (ERSS-58xLL-2-T25-30C)	3,87	2,93	2,92

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)

Annex C.1

of European
Technical Assessment
ETA-23/0651

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	-	TLK-45xLL (EPT-45xLL-PP)	HTLK-45xLL (EPT-O-45xLL-PP)
	TRP-45xLL (EPT-45xLL-PA)	TLK-75xLL (EPT-75xLL-PP)	-
	BTRP-45xLL (EPT-B-45xLL-PA)	DVP-DL-70N + TLK-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)	-
	TWP-8040xLL (EPT-8040xLL-PA)	-	-
	EDF-BAR F-TUBE + KMT-15xLL (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)	-	-
	DVP-KMT-8240 + KMT-15xLL (EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)	-	-
	EPM-T-IP-80-13.6-0.8 + KMT-15xLL (EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IT-80-13.6-0.8 + KMT-15xLL (EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IE-80-13.6-0.8 + KMT-15xLL (EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	DVP-DL-70N + TRP-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)	-	-
EDS-B-58xLL (ERSS-58xLL-2-T25-30C)	2,64	1,68	1,78

* "Pull-over" according to CEN/TS 17659:2021

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)					
	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)	DVP-EF-4010N (EPM-40N-6.0-1.0)	DVP-EF-5010D (EPM-50D-6.3-1.0)	DVP-DF-7070D (EPM-7070D-7.0-1.0)	DVP-EF-7007D (EPM-70D-6.0-0.7)
	DVP-EF-7010D (EPM-70D-6.5-1.0)	KS-EPM-8240XH-6.0-1.0	DVP-EF-5010N (EPM-50N-6.3-1.0)	DVP-DF-8240D (EPM-8240D-7.0-1.0)	DVP-EF-7007H (EPM-70H-6.0-0.7)
	DVP-EF-7010N (EPM-70N-6.5-1.0)	-	-	DVP-DF-8240H (EPM-8240H-7.0-1.0)	DVP-EF-7007N (EPM-70N-6.0-0.7)
	DVP-EF-8040D (EPM-8040D-6.5-1.0)	-	-	DVP-DF-8240XH (EPM-8240XH-7.0-1.0)	-
	DVP-EF-8040N (EPM-8040N-6.5-1.0)	-	-	DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)	-
	-	-	-	EBS-xxxxx-25-7.1-1.25 (BC-EBS-xxxxx-25-7.1-1.25)	-
EDS-B-58xLL (ERSS-58xLL-2-T25-30C)	5,05	4,43	3,89	2,96	2,91

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners	Annex C.2 of European Technical Assessment ETA-23/0651
EDS-B-58xLL (ERSS-58xLL-2-T25-30C)	

Screw:

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)

Metal pressure plate:

DVP-EF-4010N	(EPM-40N-6.0-1.0)	EPM-IE-80-6.8-0.8	
DVP-EF-5010D	(EPM-50D-6.3-1.0)	DVP-KMT-8240 + KMT-15xLL	(EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)
DVP-EF-5010N	(EPM-50N-6.3-1.0)	EPM-T-IP-80-13.6-0.8 + KMT-15xLL	(EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)
DVP-DF-7070D	(EPM-7070D-7.0-1.0)	EPM-T-IT-80-13.6-0.8 + KMT-15xLL	(EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-7007D	(EPM-70D-6.0-0.7)	EPM-T-IE-80-13.6-0.8 + KMT-15xLL	(EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-7010D	(EPM-70D-6.5-1.0)	DVP-DL-70N + TRP-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)
DVP-EF-7007H	(EPM-70H-6.0-0.7)	DVP-DL-70N + TLK-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)
DVP-EF-7007N	(EPM-70N-6.0-0.7)	KS-EPM-8240XH-6.0-1.0	
DVP-EF-7010N	(EPM-70N-6.5-1.0)		
DVP-EF-8040D	(EPM-8040D-6.5-1.0)		
DVP-EF-8040N	(EPM-8040N-6.5-1.0)		
DVP-DF-8240D	(EPM-8240D-7.0-1.0)		
DVP-DF-8240H	(EPM-8240H-7.0-1.0)		
DVP-DF-8240XH	(EPM-8240XH-7.0-1.0)		
DVP-EFB-51NS	(EPM-B-51N-5.4-0.84)		
DVP-EF-51N	(EPM-51N-6.7-0.84)		
DVP-DFB-8240D	(EPM-B-8240D-7.0-1.0)		
EPM-IP-80-6.8-0.8			
EPM-IT-80-6.8-0.8			

Pressure plate with tube:

TRP-45xLL	(EPT-45xLL-PA)
BTRP-45xLL	(EPT-B-45xLL-PA)
TWP-8040xLL	(EPT-8040xLL-PA)
TLK-45xLL	(EPT-45xLL-PP)
HTLK-45xLL	(EPT-O-45xLL-PP)
TLK-75xLL	(EPT-75xLL-PP)

Termination bar:

EDF-BAR F-TUBE	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)
EDF-BAR F-TUBE + KMT-15xLL	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)
EBS-xxxxx-25-7.1-1.25	(BC-EBS-xxxxx-25-7.1-1.25)

Substrate:

Steel S280		EN 10346
Steel S320		EN 10346
OSB/3	$\rho_{\min} = 550 \text{ kg/m}^3$	EN 12369-1
Chipboard	$\rho_{\min} = 600 \text{ kg/m}^3$	EN 12369-1
Plywood	$\rho_{\min} = 400 \text{ kg/m}^3$	EN 12369-2
Timber, class C24	$\rho_{\min} = 350 \text{ kg/m}^3$	EN 338

Installation data:


Max. drilling capacity in steel substrate:	2 x 1,25 mm
Head type:	Raised Bugle Head
Recess:	TX25
Fixing in steel substrate:	Min. 20 mm of the screw fixed through the steel sheet
Fixing in wooden and wood-based substrate:	Full thread through the substrate or minimum embedment depth
Installation force of installation tool in:	
- steel substrate	15 kg
- wooden and wood-based substrate:	30 kg
Installation tool speed:	2000 - 2500 rpm

Eurofast Flat Roof Fasteners

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)

Annex C.3

of European
Technical Assessment
ETA-23/0651

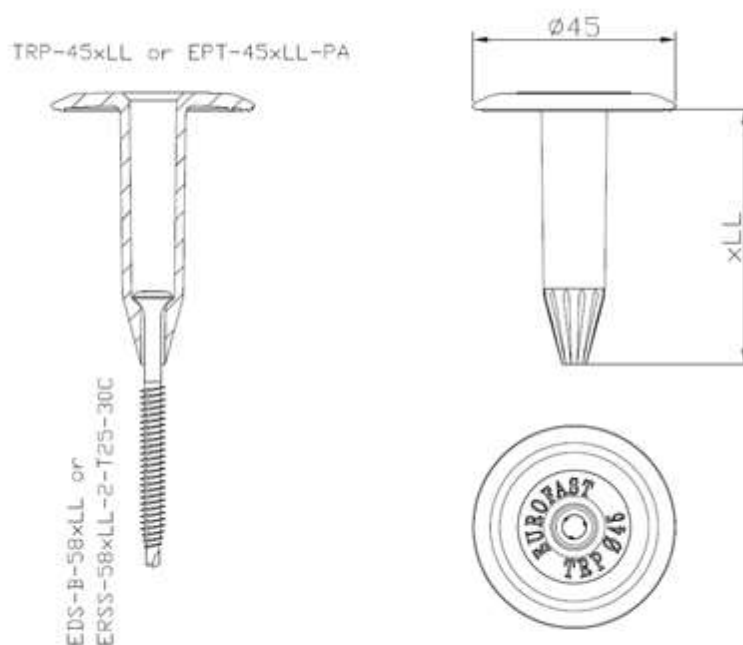


Eurofast Flat Roof Fasteners

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)



Annex C.4

of European
Technical Assessment
ETA-23/0651

BTRP-45xLL or EPT-B-45xLL-PA



TWP-8040xLL or EPT-B040xLL-PA

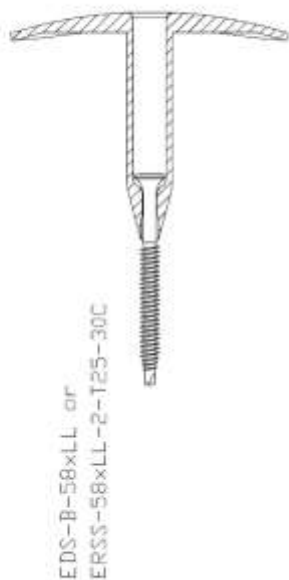


Eurofast Flat Roof Fasteners


EDS-B-58xLL (ERSS-58xLL-2-T25-30C)

Annex C.5
of European
Technical Assessment
ETA-23/0651

EDF-BAR-F-TUBE + KMT-15xLL or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0
+ EPT-15xLL-PA

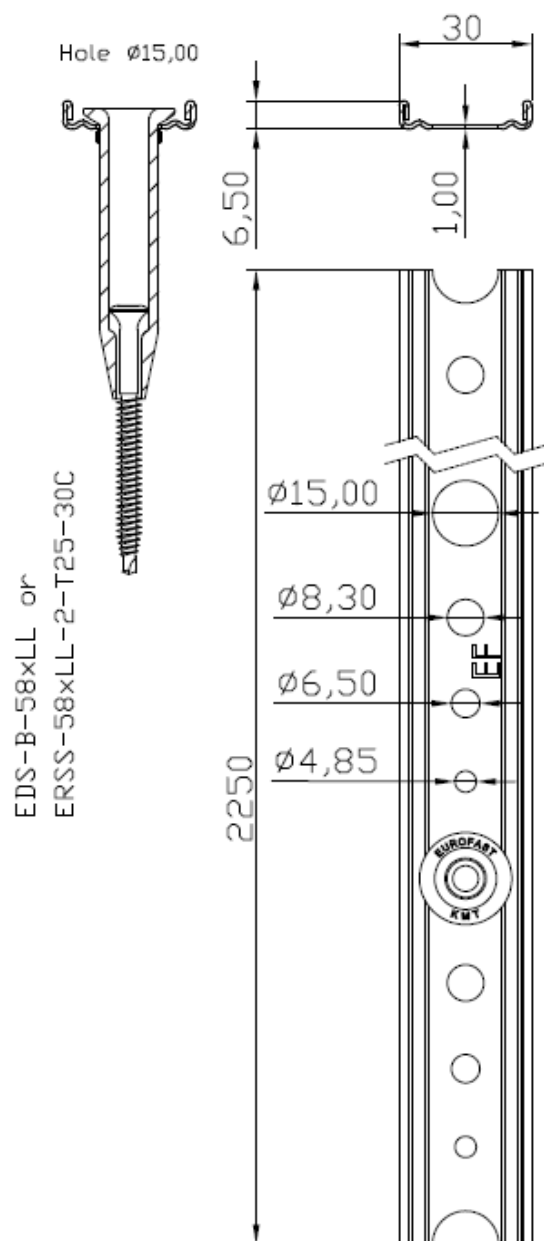

EDF-BAR-F-TUBE or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0

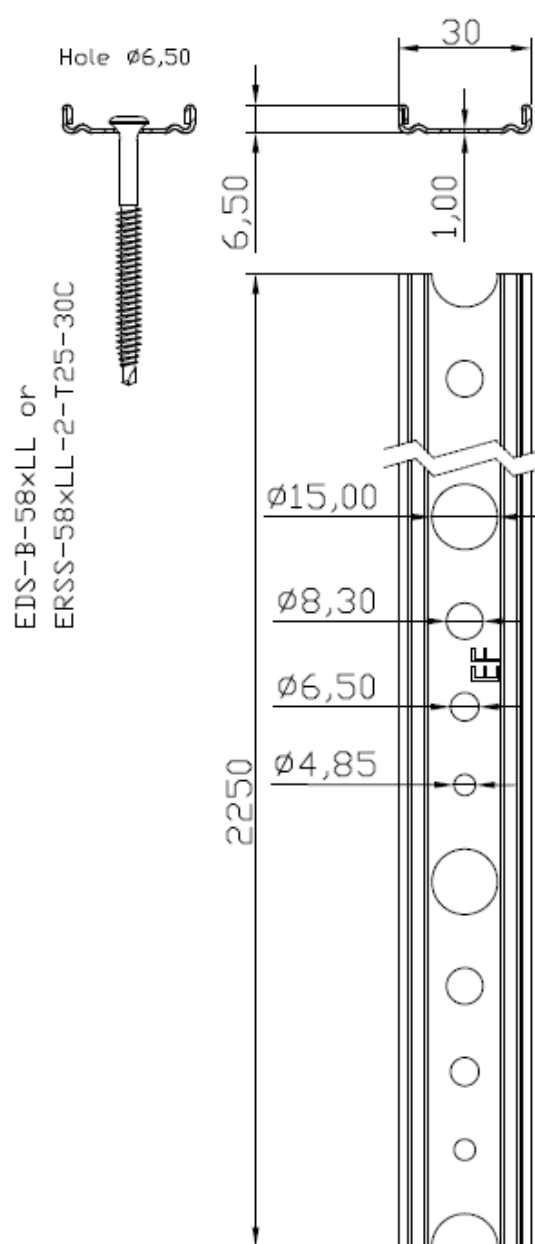



Eurofast Flat Roof Fasteners

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)



Annex C.6

of European
Technical Assessment
ETA-23/0651

TLK-45xLL or EPT-45xLL-PP

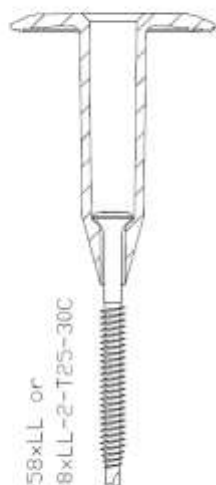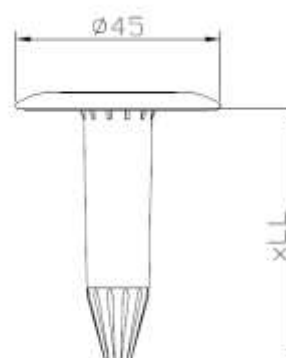EDS-B-58xLL or
ERSS-58xLL-2-T25-30C

HTLK-45xLL or EPT-D-45xLL-PP

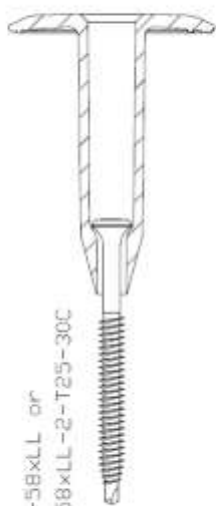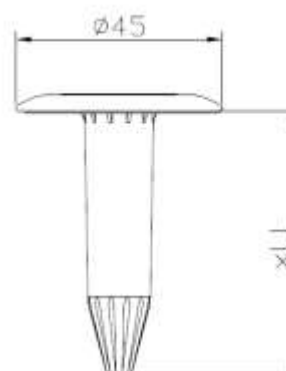
EDS-B-58xLL or
ERSS-58xLL-2-T25-30C

Eurofast Flat Roof Fasteners



EDS-B-58xLL (ERSS-58xLL-2-T25-30C)

Annex C.7
of European
Technical Assessment
ETA-23/0651

TLK-75xLL or EPT-75xLL-PP

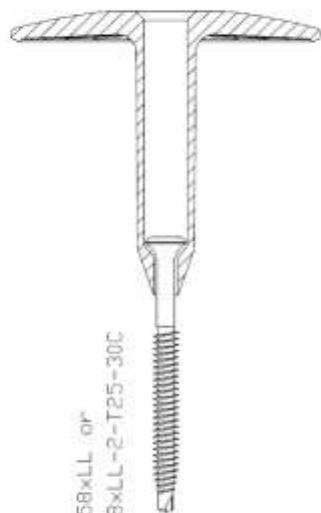
EDS-B-58xLL or
ERSS-58xLL-2-T25-30C


DVP-EF-4010N or EPM-40N-6.0-1.0

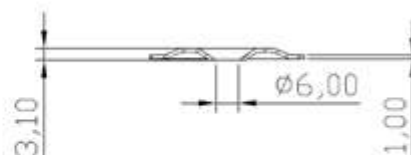
EDS-B-58xLL or
ERSS-58xLL-2-T25-30C


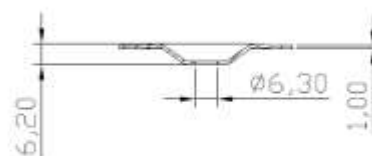
Eurofast Flat Roof Fasteners

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)

Annex C.8

of European
Technical Assessment
ETA-23/0651

DVP-EF-5010D or EPM-50D-6.3-1.0

EDS-B-58xLL or
ERSS-58xLL-2-T25-30C

DR




EF

DVP-EF-5010N or EPM-50N-6.3-1.0

EDS-B-58xLL or
ERSS-58xLL-2-T25-30C

DR



EF


Eurofast Flat Roof Fasteners

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)


Annex C.9

of European
Technical Assessment
ETA-23/0651

DVP-DF-7070D or EPM-7070D-7.0-1.0

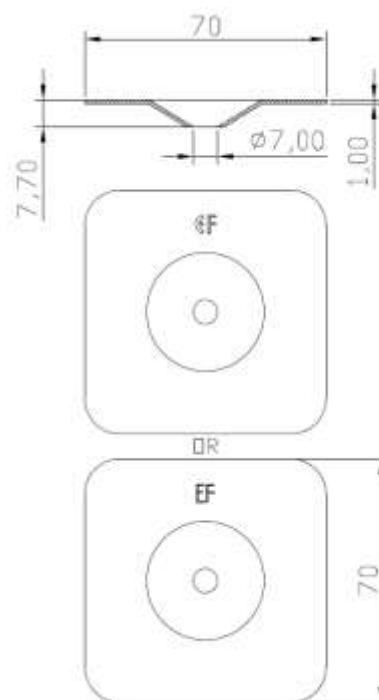
EDS-B-58xLL or
ERSS-58xLL-2-T25-30C


DVP-EF-7007D or EPM-70D-6.0-0.7

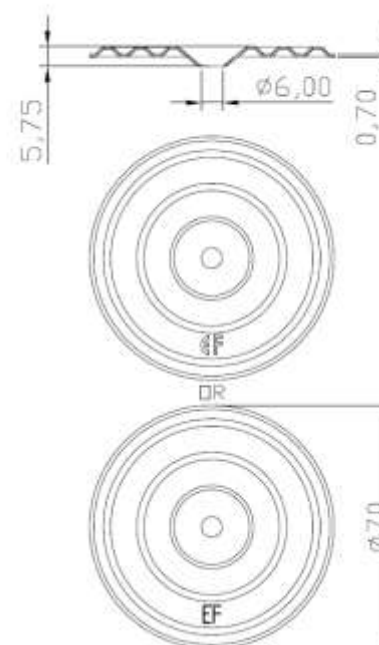
EDS-B-58xLL or
ERSS-58xLL-2-T25-30C


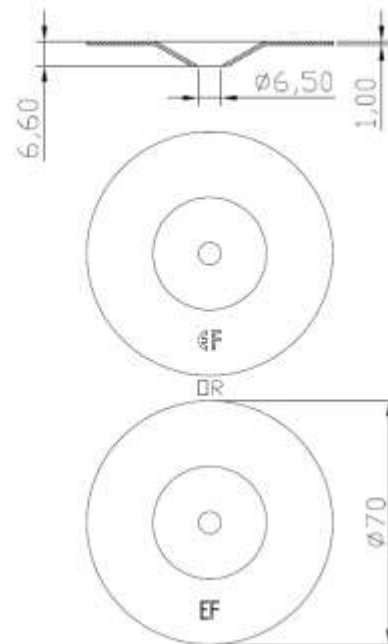
Eurofast Flat Roof Fasteners

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)


Annex C.10

of European
Technical Assessment
ETA-23/0651

DVP-EF-7010D or EPM-70D-6,5-1,0

EDS-B-58xLL or
ERSS-58xLL-2-T25-30C

DVP-EF-7007H or EPM-70H-6,0-0,7

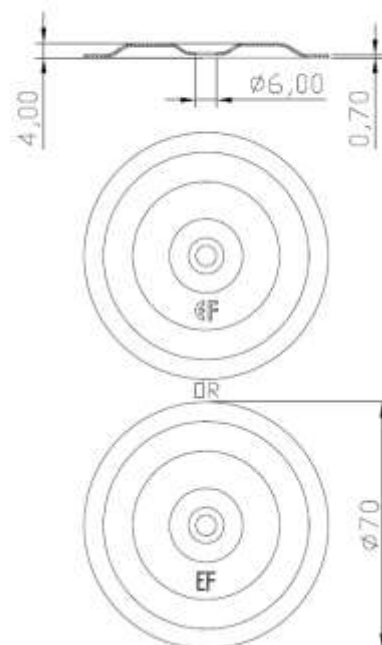
EDS-B-58xLL or
ERSS-58xLL-2-T25-30C

Eurofast Flat Roof Fasteners


EDS-B-58xLL (ERSS-58xLL-2-T25-30C)

Annex C.11
of European
Technical Assessment
ETA-23/0651

DVP-EF-7007N or EPM-70N-6.0-0.7

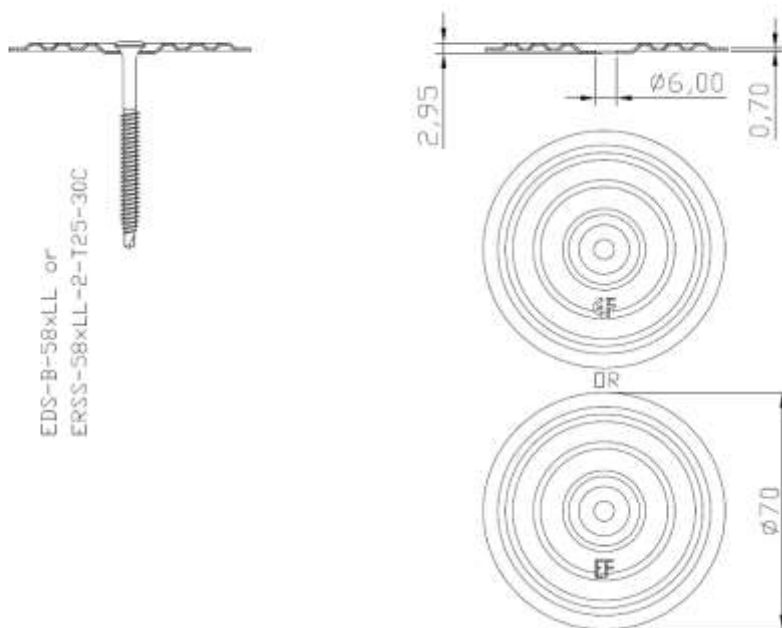

DVP-EF-7010N or EPM-70N-6.5-1.0

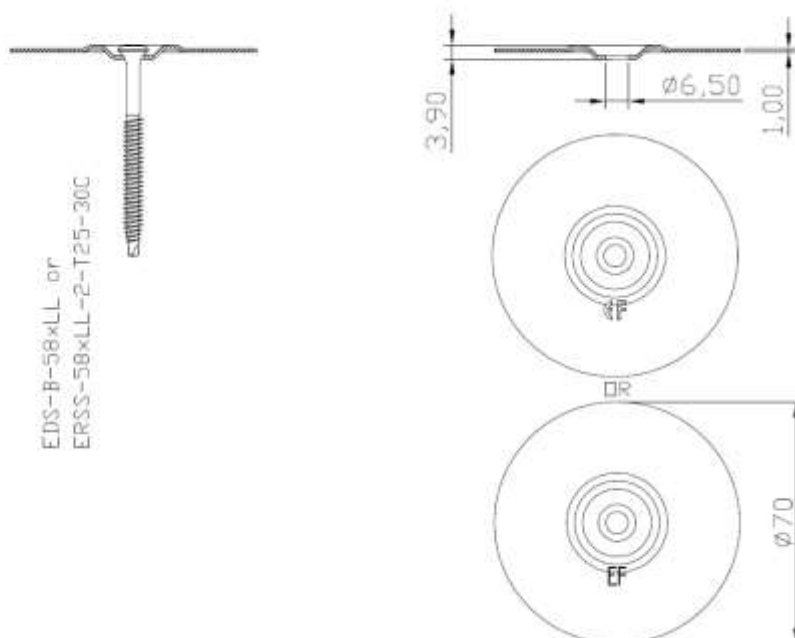



Eurofast Flat Roof Fasteners

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)


Annex C.12

of European
Technical Assessment
ETA-23/0651




DVP-EF-8040D or EPM-8040D-6,5-1,0

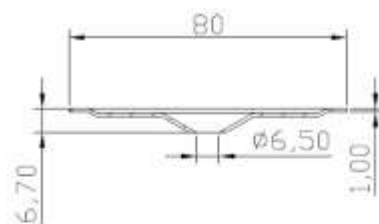EDS-B-58xLL or
ERSS-58xLL-2-T25-30C

OR



DVP-EF-8040N or EPM-8040N-6,5-1,0

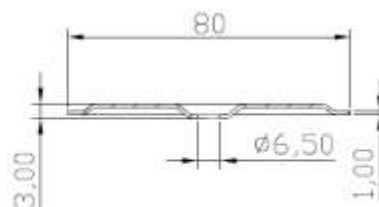EDS-B-58xLL or
ERSS-58xLL-2-T25-30C

OR






Eurofast Flat Roof Fasteners

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)

Annex C.13

of European
Technical Assessment
ETA-23/0651


DVP-DF-8240D or EPM-8240D-7,00-1,0

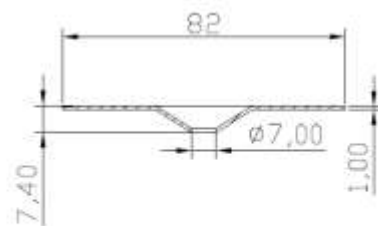
EDS-B-58xLL or
ERSS-58xLL-2-T25-30C


DR



DVP-DF-8240H or EPM-8240H-7,0-1,0

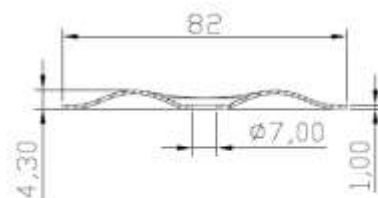
EDS-B-58xLL or
ERSS-58xLL-2-T25-30C


DR




Eurofast Flat Roof Fasteners

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)



Annex C.14

of European
Technical Assessment
ETA-23/0651


DVP-KMT-8240 + KMT-15xLL or
EPM-T-8240N-13,6-1.0 + EPT-15xLL-PA

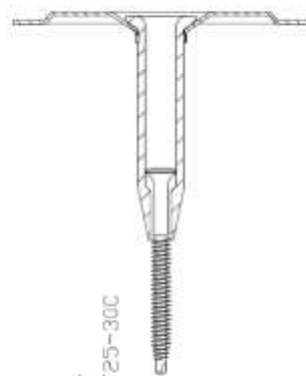

EDS-B-58xLL or
ERSS-58xLL-2-T25-30C

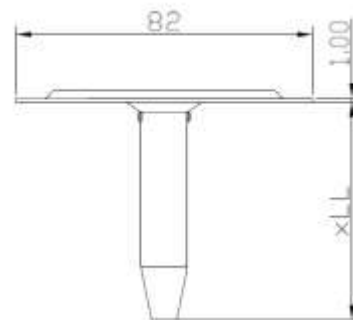


DR

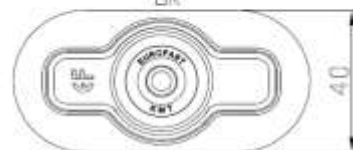

DVP-DF-8240XH or EPM-8240XH-7.0-1.0



EDS-B-58xLL or
ERSS-58xLL-2-T25-30C

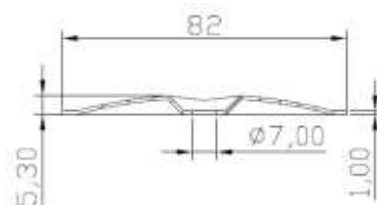

DR





Eurofast Flat Roof Fasteners



EDS-B-58xLL (ERSS-58xLL-2-T25-30C)

Annex C.15
of European
Technical Assessment
ETA-23/0651

DVP-EFB-51NS or EPM-B-51N-5.4-0.84

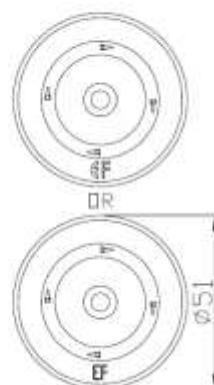
EDS-B-58xLL or
ERSS-58xLL-2-T25-30C


DVP-EF-51N or EPM-51N-6.7-0.84

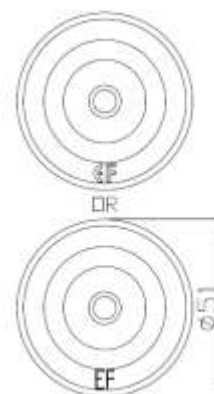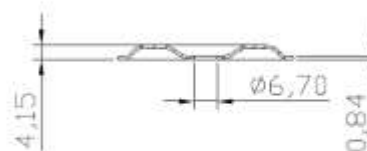
EDS-B-58xLL or
ERSS-58xLL-2-T25-30C




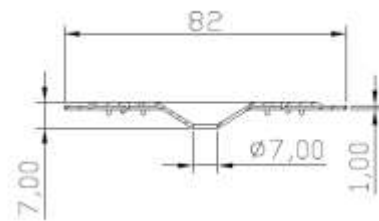
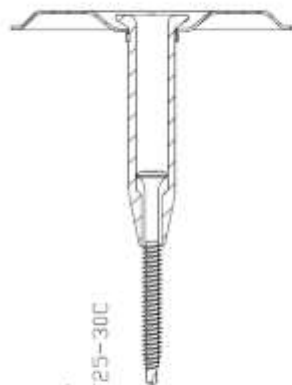

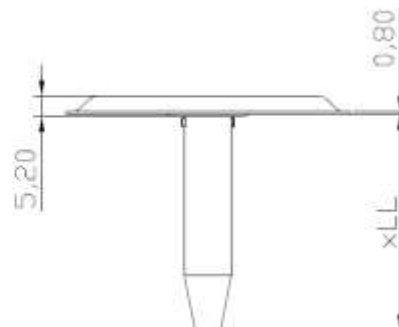
Eurofast Flat Roof Fasteners

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)

Annex C.16

of European
Technical Assessment
ETA-23/0651



DVP-DFB-8240D or EPM-B-8240D-7,0-1,0

EDS-B-58xLL or
ERSS-58xLL-2-T25-30CEPM-T-IP-80-13,6-0,8 + KMT-15xLL or
EPM-T-IP-80-13,6-0,8 + EPT-15xLL-PAEDS-B-58xLL or
ERSS-58xLL-2-T25-30C

Eurofast Flat Roof Fasteners

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)

Annex C.17
of European
Technical Assessment
ETA-23/0651

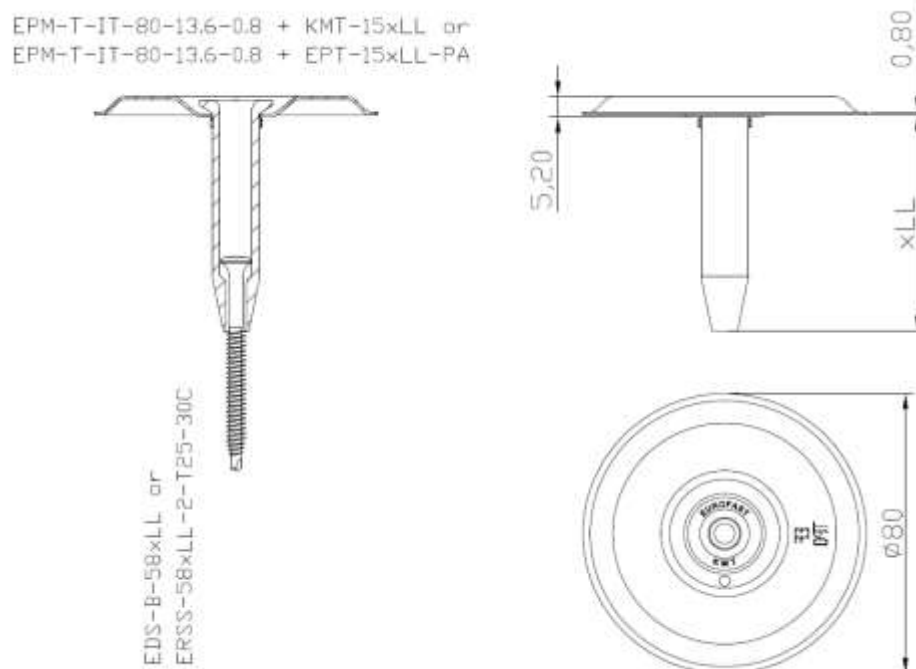
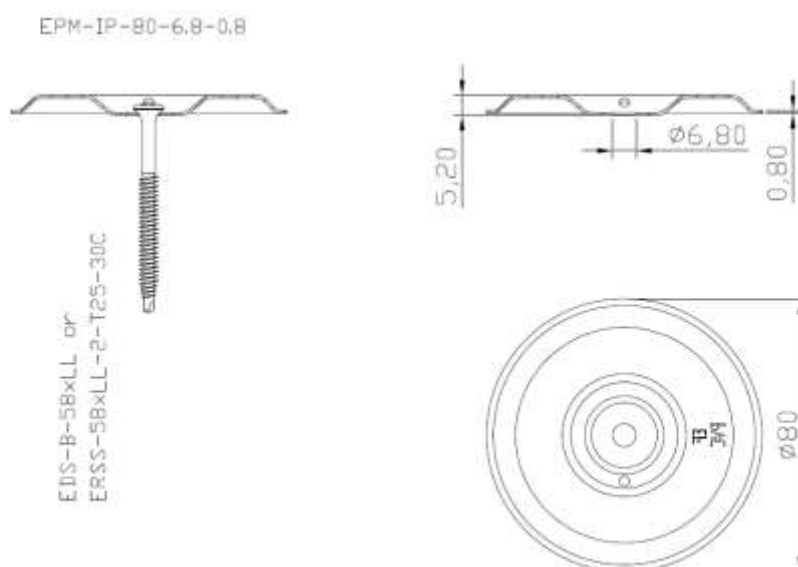



Eurofast Flat Roof Fasteners

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)


Annex C.18

of European
Technical Assessment
ETA-23/0651

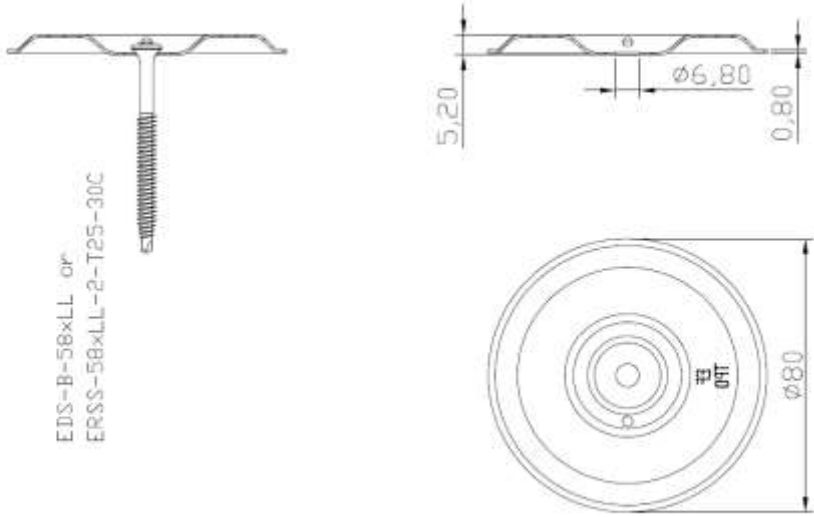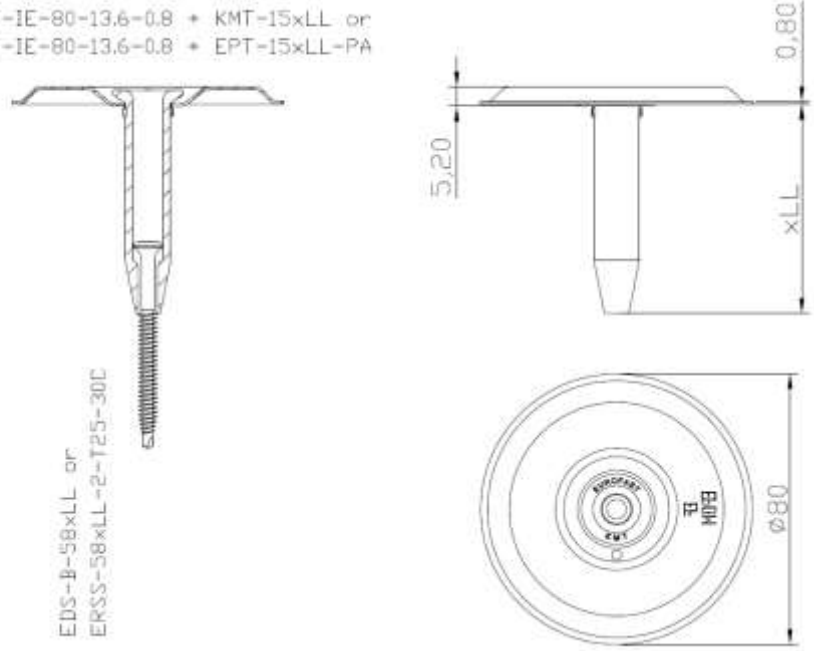EPM-1T-80-6,8-0,8  EDS-B-58xLL or ERSS-58xLL-2-T25-30C	
EPM-T-1E-80-13,6-0,8 + KMT-15xLL or EPM-T-1E-80-13,6-0,8 + EPT-15xLL-PA  EDS-B-58xLL or ERSS-58xLL-2-T25-30C	
Eurofast Flat Roof Fasteners	Annex C.19 of European Technical Assessment ETA-23/0651
EDS-B-58xLL (ERSS-58xLL-2-T25-30C)	

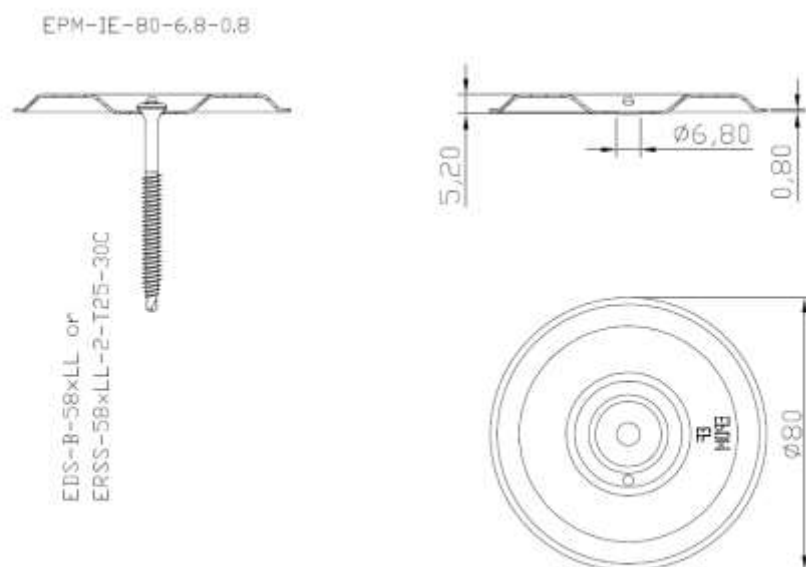

DVP-DL-70N + TLK-45xLL or
EPM-EDL-70N-20-0,5 + EPT-45xLL-PP

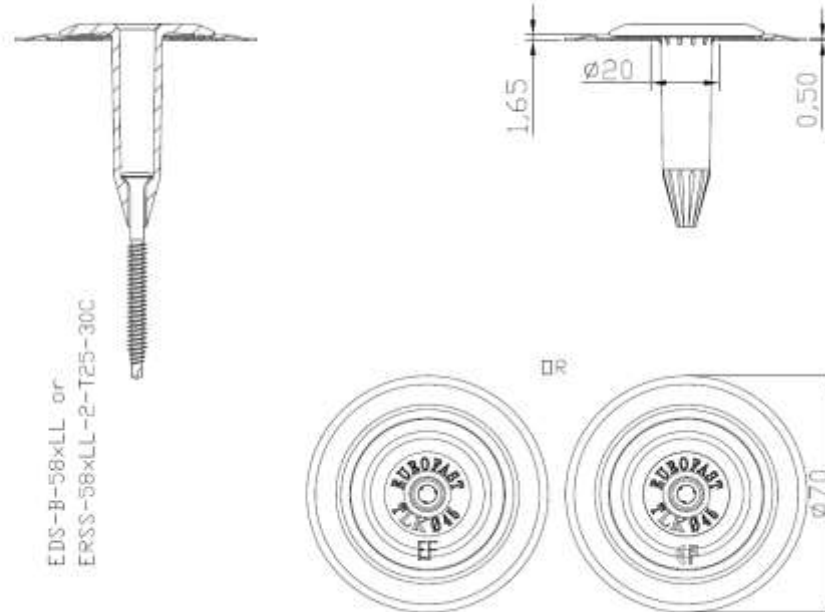


Eurofast Flat Roof Fasteners

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)



Annex C.20

of European
Technical Assessment
ETA-23/0651


DVP-DL-70N + TRP-45xLL or
EPM-EDL-70N-20-0.5 + EPT-45xLL-PA

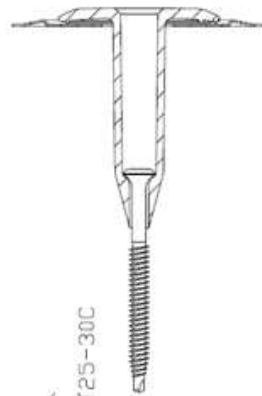


EDS-B-58xLL or
ERSS-58xLL-2-T25-30C

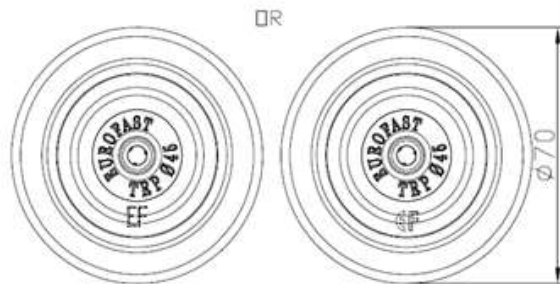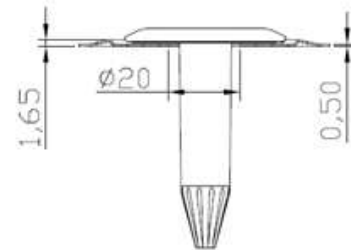

KS-EPM-8240XH-6.0-1.0

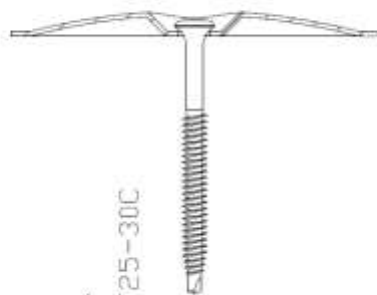

EDS-B-58xLL or
ERSS-58xLL-2-T25-30C

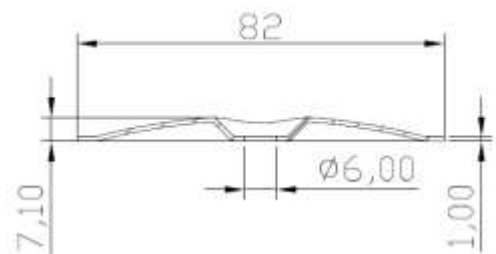


Eurofast Flat Roof Fasteners

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)

Annex C.21

of European
Technical Assessment
ETA-23/0651


EBS-xxxxx-25-7.1-1.25 or
BC-EBS-xxxxx-25-7.1-1.25

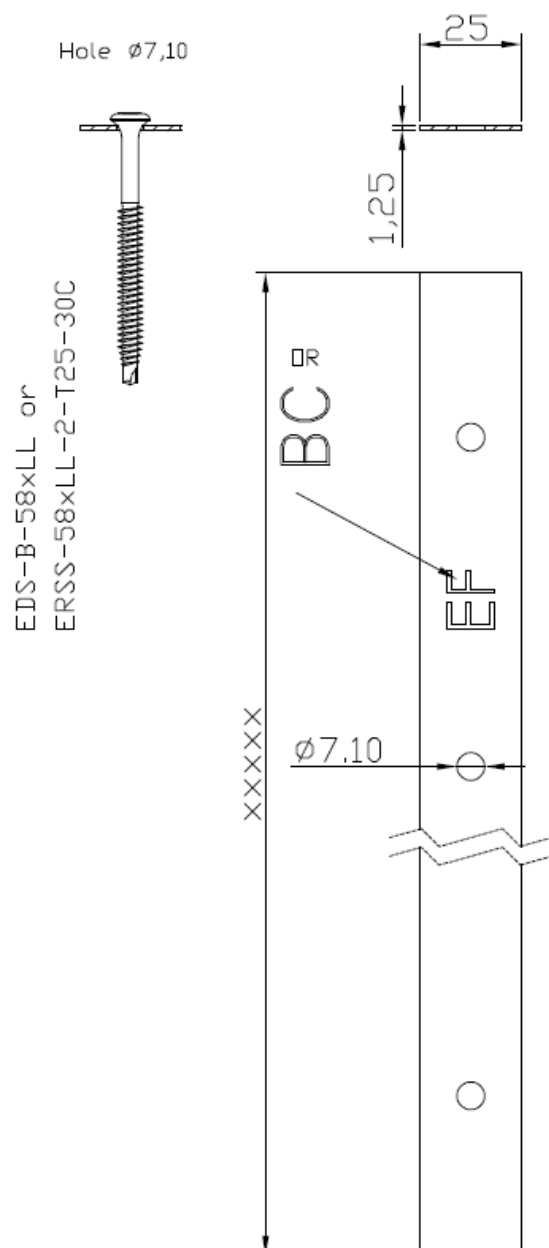

Eurofast Flat Roof Fasteners

EDS-B-58xLL (ERSS-58xLL-2-T25-30C)

Annex C.22
of European
Technical Assessment
ETA-23/0651

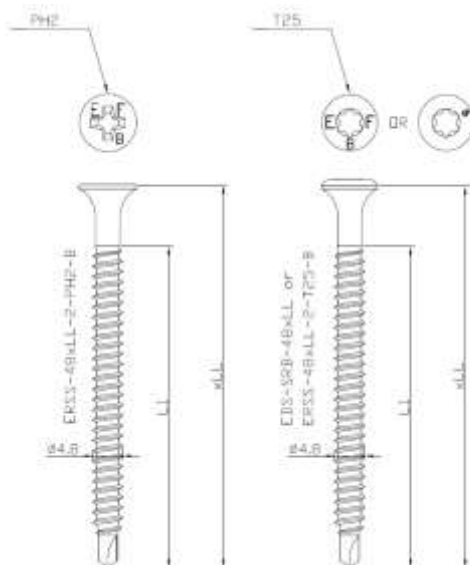

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)									
t [mm]	Steel S320GD*						Aluminium		
	0,70	0,75	0,80	0,88	1,00	1,25	0,80	0,85	1,00
EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)	1,15	1,17	1,31	1,31	1,36	2,23	0,71	0,75	1,02
ERSS-48xLL-2-PH2-B	1,15	1,17	1,31	1,31	1,36	2,23	0,71	0,75	1,02

* when using steel S280GD, values must be reduced by 8%

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)							
t [mm]	OSB/3			Chipboard	Plywood		Timber C24
	18	21	25	19	18	21	24
EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)	1,12	1,12	1,30	1,16	1,01	1,07	1,75
ERSS-48xLL-2-PH2-B	1,12	1,12	1,30	1,16	1,01	1,07	1,75

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)					
	DVP-EF-7005D (EPM-70D-5.0-0.5)	DVP-EF-7007D (EPM-70D-6.0-0.7)	DVP-EFB-51NS (EPM-B-51N-5.4-0.84)	DVP-EF-51N (EPM-51N-6.7-0.84)	EPM-IP-80-6.8-0.8
	DVP-EF-7005N (EPM-70N-5.1-0.5)	DVP-EF-7007H (EPM-70H-6.0-0.7)	-	-	EPM-IT-80-6.8-0.8
	-	DVP-EF-7007N (EPM-70N-6.0-0.7)	-	-	EPM-IE-80-6.8-0.8
EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)	2,36	2,91	3,87	2,93	2,92
ERSS-48xLL-2-PH2-B	2,36	2,91	3,87	2,93	2,92

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.1

of European
Technical Assessment
ETA-23/0651

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	-	TLK-45xLL (EPT-45xLL-PP)	HTLK-45xLL (EPT-O-45xLL-PP)
	TRP-45xLL (EPT-45xLL-PA)	TLK-75xLL (EPT-75xLL-PP)	-
	BTRP-45xLL (EPT-B-45xLL-PA)	DVP-DL-70N + TLK-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)	-
	TWP-8040xLL (EPT-8040xLL-PA)	-	-
	EDF-BAR F-TUBE + KMT-15xLL (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)	-	-
	DVP-KMT-8240 + KMT-15xLL (EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)	-	-
	EPM-T-IP-80-13.6-0.8 + KMT-15xLL (EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IT-80-13.6-0.8 + KMT-15xLL (EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IE-80-13.6-0.8 + KMT-15xLL (EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	DVP-DL-70N + TRP-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)	-	-
EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)	2,64	1,68	1,78
ERSS-48xLL-2-PH2-B	2,64	1,68	1,78

* "Pull-over" according to CEN/TS 17659:2021

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)					
	EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)	DVP-EF-7010D (EPM-70D-6.5-1.0)	DVP-EF-4010N (EPM-40N-6.0-1.0)	DVP-EF-5010D (EPM-50D-6.3-1.0)	DVP-DF-7070D (EPM-7070D-7.0-1.0)
	EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)	DVP-EF-7010N (EPM-70N-6.5-1.0)	KS-EPM-8240XH- 6.0-1.0	DVP-EF-5010N (EPM-50N-6.3-1.0)	DVP-DF-8240D (EPM-8240D-7.0-1.0)
	DVP-EF-5010DFR (EPM-50D-4.85-1.0)	DVP-EF-8040D (EPM-8040D-6.5-1.0)	-	-	DVP-DF-8240H (EPM-8240H-7.0-1.0)
	DVP-EF-7070D (EPM-7070D-4.85-1.0)	DVP-EF-8040N (EPM-8040N-6.5-1.0)	-	-	DVP-DF-8240XH (EPM-8240XH-7.0-1.0)
	DVP-EF-7010DFR (EPM-70D-4.85-1.0)	-	-	-	DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)
	DVP-EF-8240D (EPM-8240D-4.85-1.0)	-	-	-	EBS-xxxxx-25-7.1-1.25 (BC-EBS-xxxxx-25-7.1-1.25)
	DVP-EF-8240XH (EPM-8240XH-4.85-1.0)	-	-	-	-
	DVP-EFB-8240D (EPM-B-8240D-4.85-1.0)	-	-	-	-
	DVP-EFZK-8240D (EPM-ZK-8240D-4.85-1.0)	-	-	-	-
	DVP-EFF-8040D (EPM-8040D-4.85-1.0)	-	-	-	-
	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3- 15.0-1.0)	-	-	-	-
EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)	5,18	5,05	4,43	3,89	2,96
ERSS-48xLL-2-PH2-B	5,18	5,05	4,43	3,89	2,96

Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.2

of European
Technical Assessment
ETA-23/0651

Screw:

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
 ERSS-48xLL-2-PH2-B

Metal pressure plate:

DVP-EF-4010N	(EPM-40N-6.0-1.0)	DVP-DF-8240H	(EPM-8240H-7.0-1.0)
DVP-EF-5010DFR	(EPM-50D-4.85-1.0)	DVP-EF-8240XH	(EPM-8240XH-4.85-1.0)
DVP-EF-5010D	(EPM-50D-6.3-1.0)	DVP-DF-8240XH	(EPM-8240XH-7.0-1.0)
DVP-EF-5010N	(EPM-50N-6.3-1.0)	DVP-EFB-51NS	(EPM-B-51N-5.4-0.84)
DVP-EF-7070D	(EPM-7070D-4.85-1.0)	DVP-EF-51N	(EPM-51N-6.7-0.84)
DVP-DF-7070D	(EPM-7070D-7.0-1.0)	DVP-EFB-8240D	(EPM-B-8240D-4.85-1.0)
DVP-EF-7010DFR	(EPM-70D-4.85-1.0)	DVP-DFB-8240D	(EPM-B-8240D-7.0-1.0)
DVP-EF-7005D	(EPM-70D-5.0-0.5)	DVP-EFZK-8240D	(EPM-ZK-8240D-4.85-1.0)
DVP-EF-7007D	(EPM-70D-6.0-0.7)	DVP-EFF-8040D	(EPM-8040D-4.85-1.0)
DVP-EF-7010D	(EPM-70D-6.5-1.0)	EPM-IP-80-6.8-0.8	
DVP-EF-7007H	(EPM-70H-6.0-0.7)	EPM-IT-80-6.8-0.8	
DVP-EF-7005N	(EPM-70N-5.1-0.5)	EPM-IE-80-6.8-0.8	
DVP-EF-7007N	(EPM-70N-6.0-0.7)	DVP-KMT-8240 + KMT-15xLL	(EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)
DVP-EF-7010N	(EPM-70N-6.5-1.0)	EPM-T-IP-80-13.6-0.8 + KMT-15xLL	(EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8040D	(EPM-8040D-6.5-1.0)	EPM-T-IT-80-13.6-0.8 + KMT-15xLL	(EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8040N	(EPM-8040N-6.5-1.0)	EPM-T-IE-80-13.6-0.8 + KMT-15xLL	(EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8240D	(EPM-8240D-4.85-1.0)	DVP-DL-70N + TRP-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)
DVP-DF-8240D	(EPM-8240D-7.0-1.0)	DVP-DL-70N + TLK-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)
		KS-EPM-8240XH-6.0-1.0	

Pressure plate with tube:

TRP-45xLL (EPT-45xLL-PA)
 BTRP-45xLL (EPT-B-45xLL-PA)
 TWP-8040xLL (EPT-8040xLL-PA)
 TLK-45xLL (EPT-45xLL-PP)
 HTLK-45xLL (EPT-O-45xLL-PP)
 TLK-75xLL (EPT-75xLL-PP)

Termination bar:

EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)
 EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)
 EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)
 EDF-BAR F-TUBE + KMT-15xLL (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)
 EBS-xxxxx-25-7.1-1.25 (BC-EBS-xxxxx-25-7.1-1.25)

Substrate:

Steel S280		EN 10346
Steel S320		EN 10346
Aluminium	$R_m \geq 195 \text{ N/mm}^2$	EN 485
OSB/3	$\rho_{\min} = 550 \text{ kg/m}^3$	EN 12369-1
Chipboard	$\rho_{\min} = 600 \text{ kg/m}^3$	EN 12369-1
Plywood	$\rho_{\min} = 400 \text{ kg/m}^3$	EN 12369-2
Timber, class $\geq$ C24	$\rho_{\min} = 350 \text{ kg/m}^3$	EN 338

Installation data:


Max. drilling capacity in steel substrate:	2x1,25 mm
Head type:	Bugle Head / Raised Bugle Head
Recess:	PH2 / TX25
Fixing in steel substrate:	Min. 20 mm of the screw fixed through the steel sheet
Fixing in aluminium substrate:	Min. 20 mm of the screw fixed through the aluminium sheet
Fixing in wooden and wood-based substrate:	Full thread through the substrate or minimum embedment depth
Installation force of installation tool in:	
- steel and aluminium substrate	25 kg
- wooden and wood-based substrate:	35 kg
Installation tool speed:	1500 - 2500 rpm

Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
 (ERSS-48xLL-2-PH2-B)

Annex D.3

of European
 Technical Assessment
 ETA-23/0651


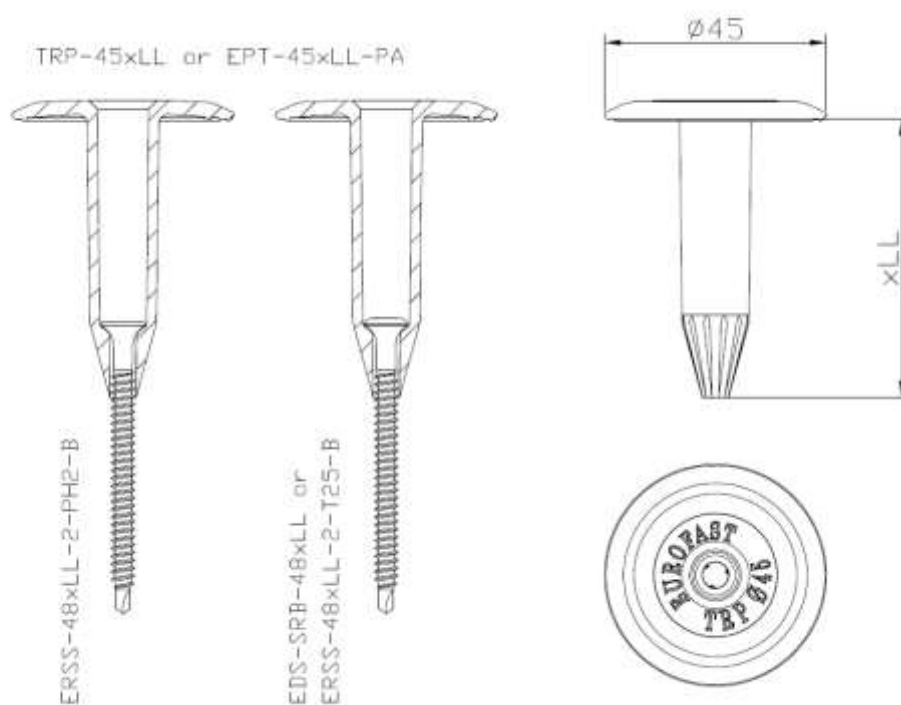


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)


Annex D.4

of European
Technical Assessment
ETA-23/0651

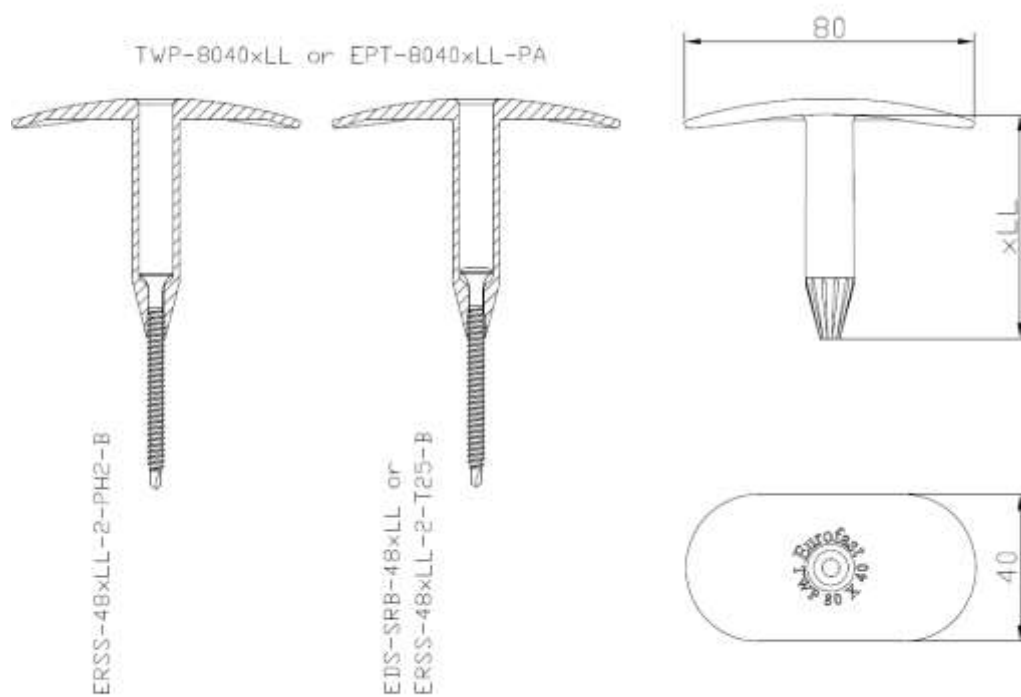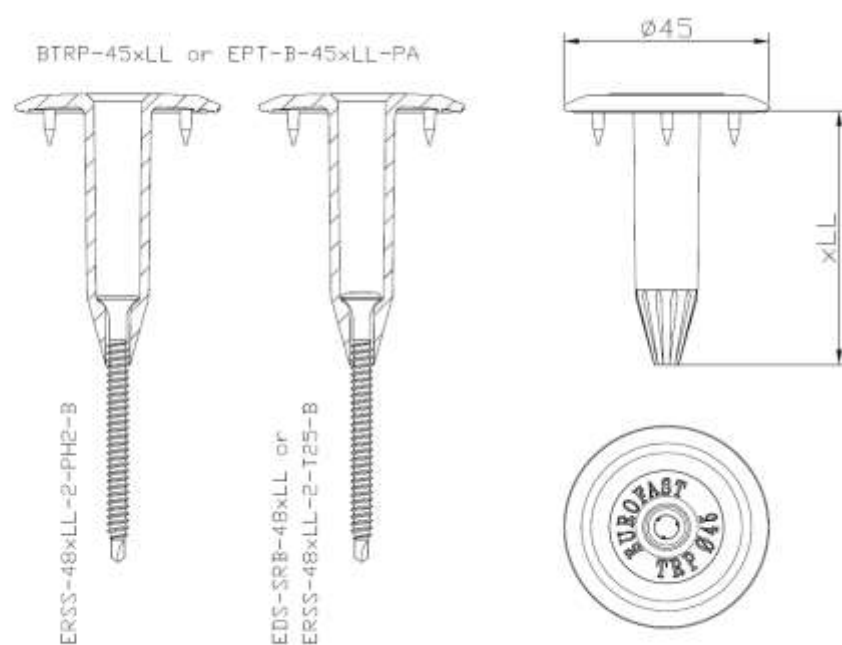


Eurofast Flat Roof Fasteners	Annex D.5 of European Technical Assessment ETA-23/0651
EDS-SRB-48xLL (ERSS-48xLL-2-T25-B) (ERSS-48xLL-2-PH2-B)	

EDF-BAR-F-TUBE + KMT-15xLL or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0
+ EPT-15xLL-PA

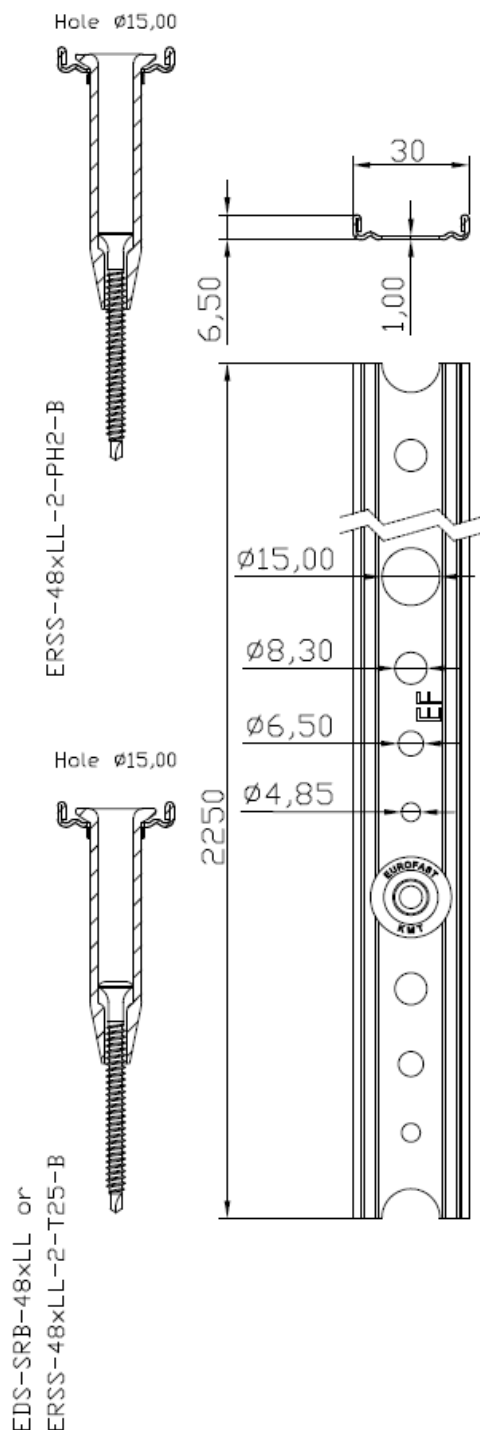

EDF-BAR-F-TUBE or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0

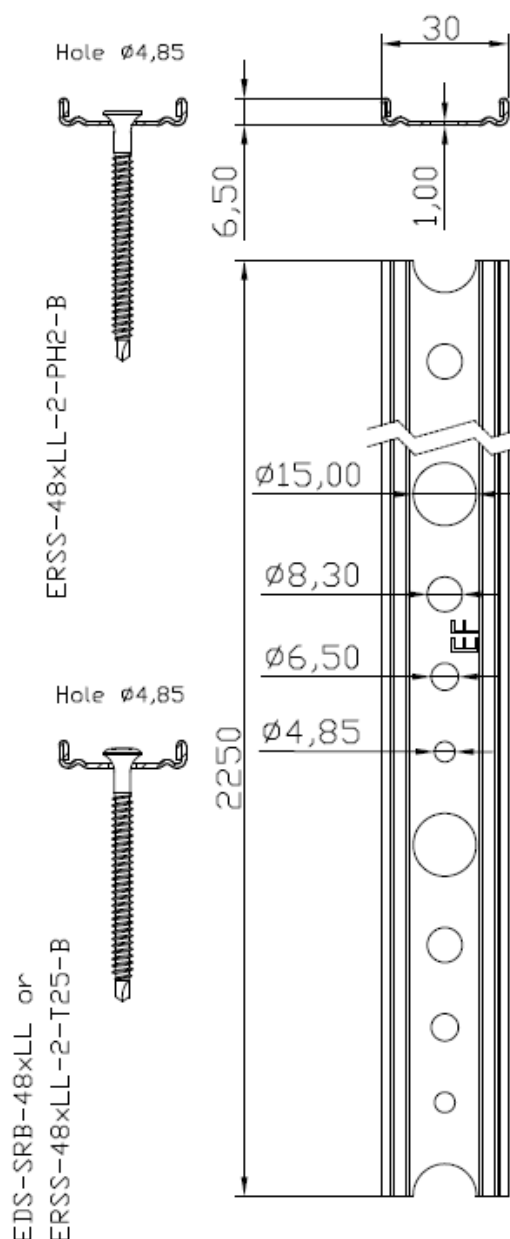


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)


Annex D.6

of European
Technical Assessment
ETA-23/0651

EDF-BAR F or
ETM-2250-30-4.8-8.5-1.0

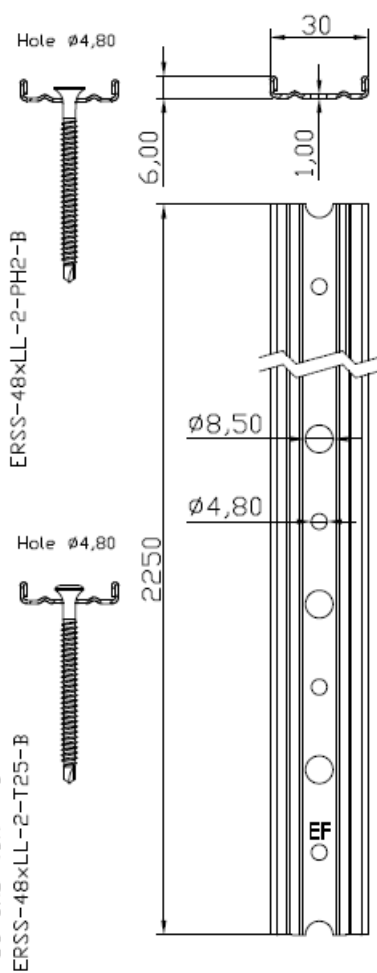

EDF-BAR FB or
ETM-B-2250-30-4.8-8.5-1.0


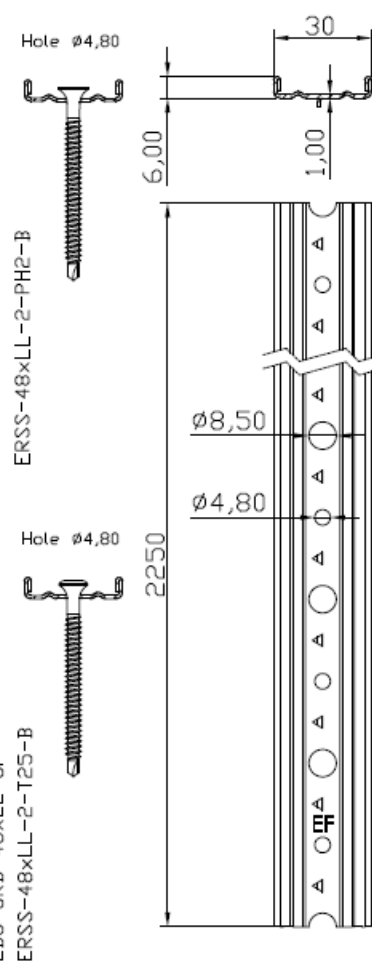


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.7

of European
Technical Assessment
ETA-23/0651

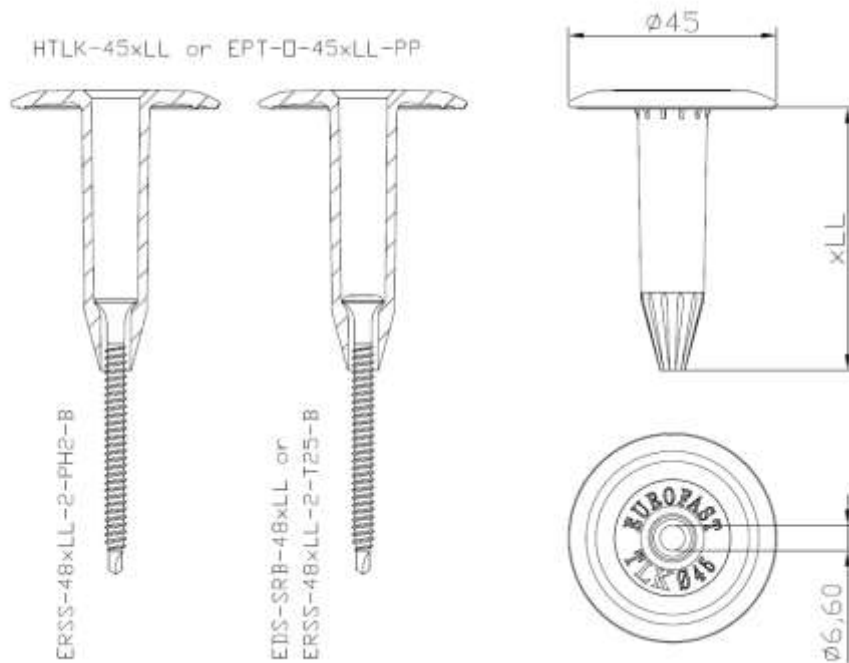
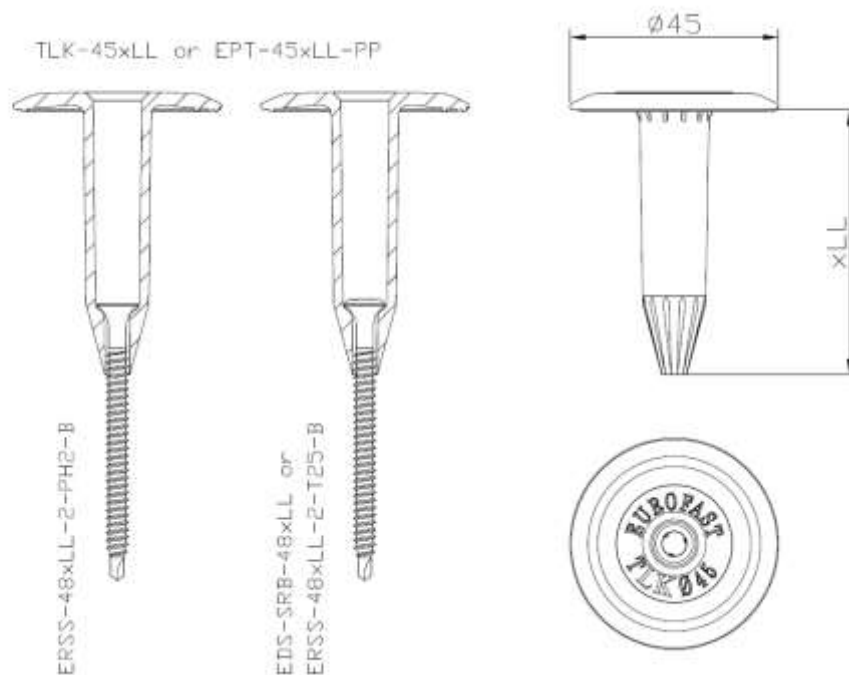


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.8

of European
Technical Assessment
ETA-23/0651

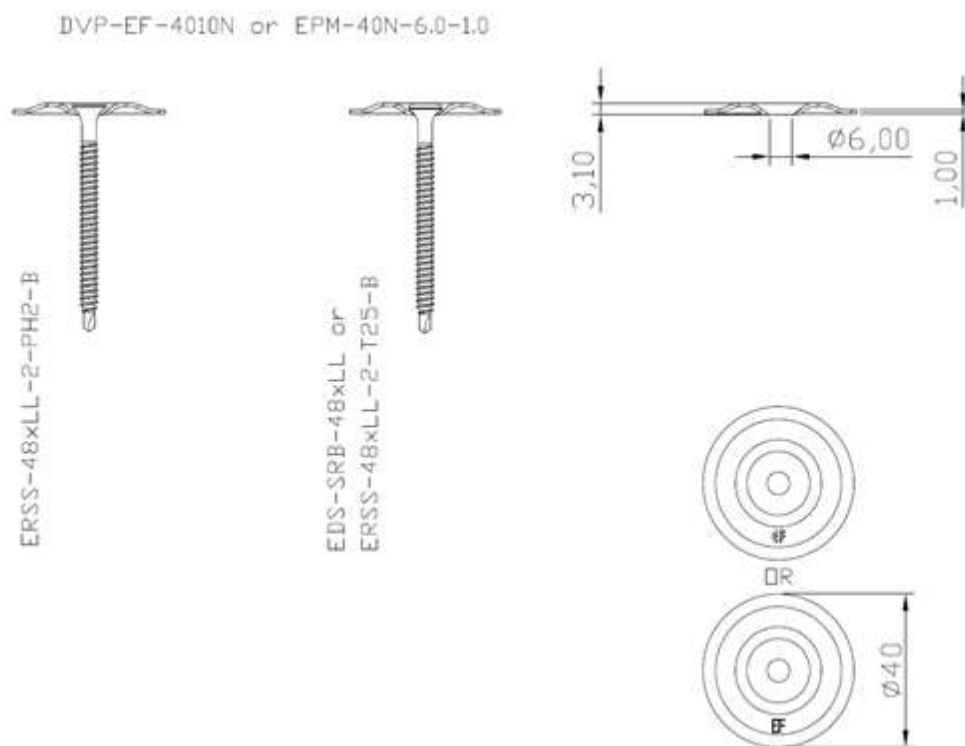
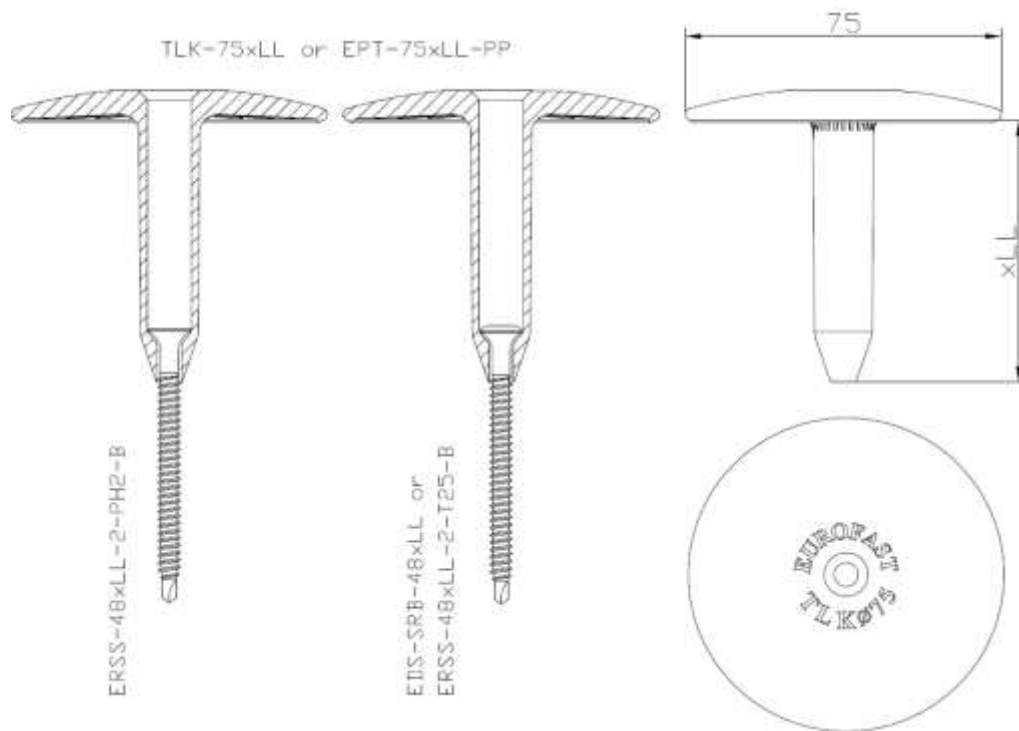


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.9

of European
Technical Assessment
ETA-23/0651

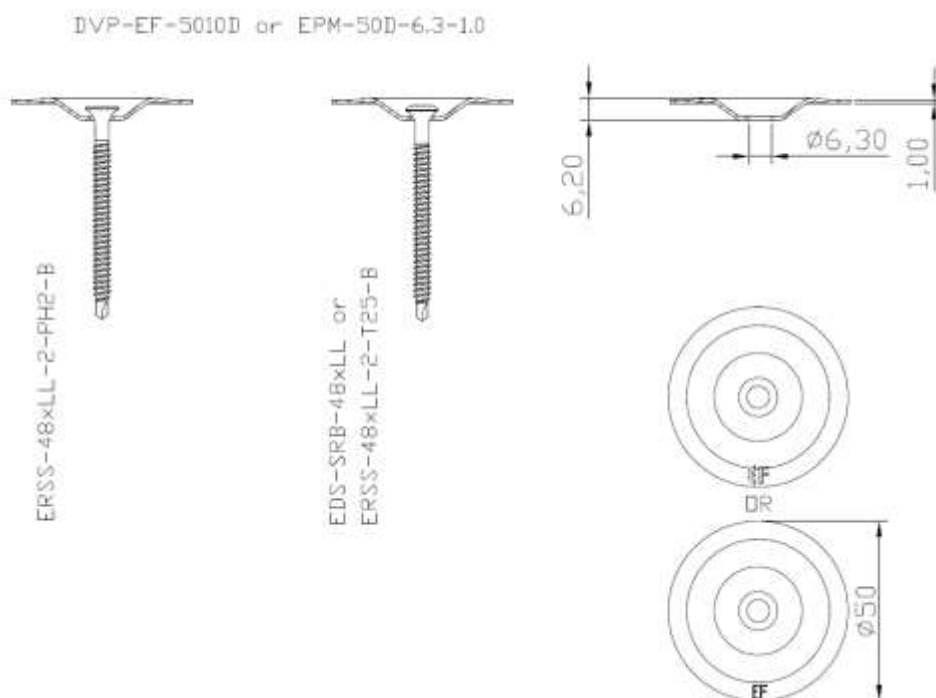
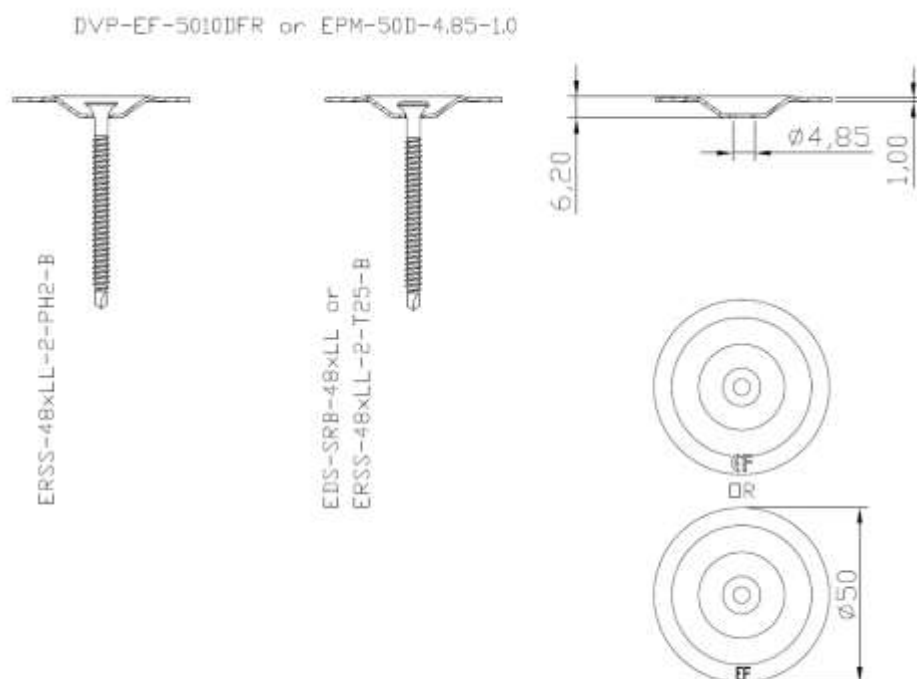


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.10

of European
Technical Assessment
ETA-23/0651

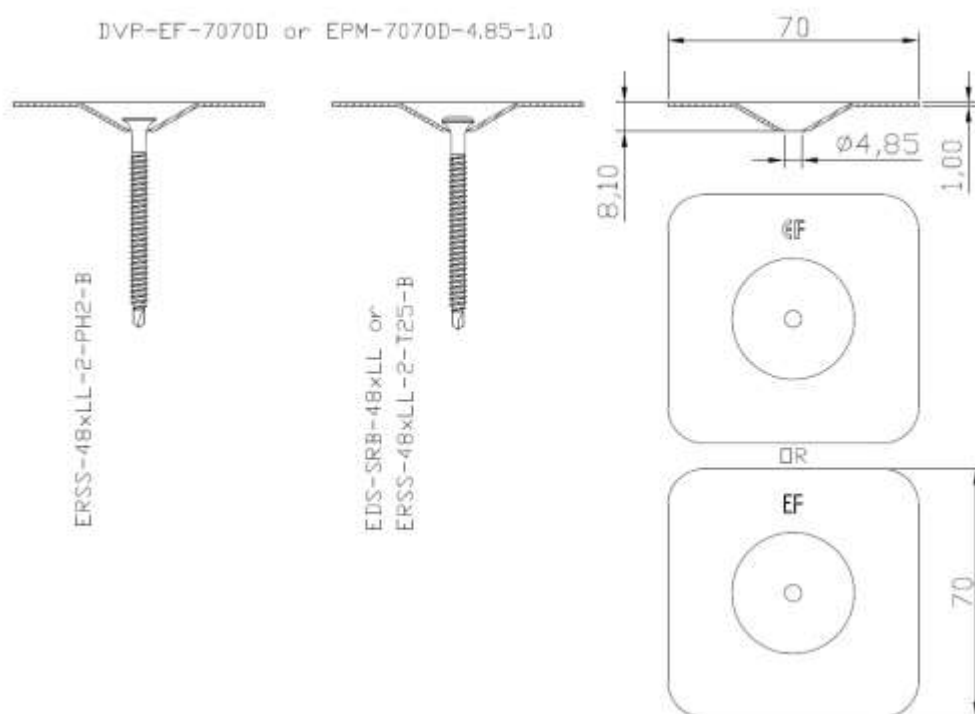
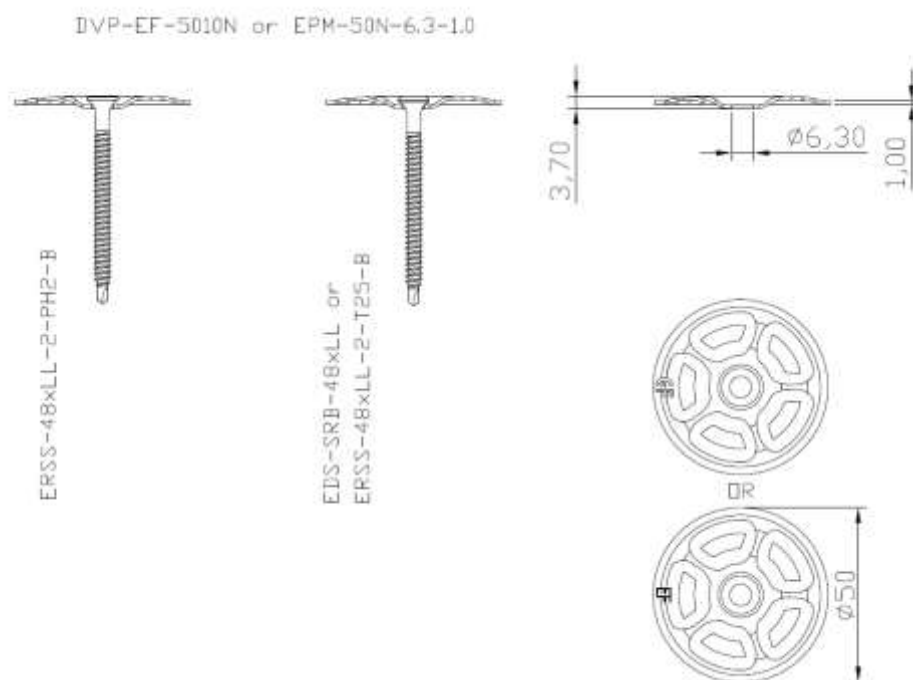


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.11

of European
Technical Assessment
ETA-23/0651

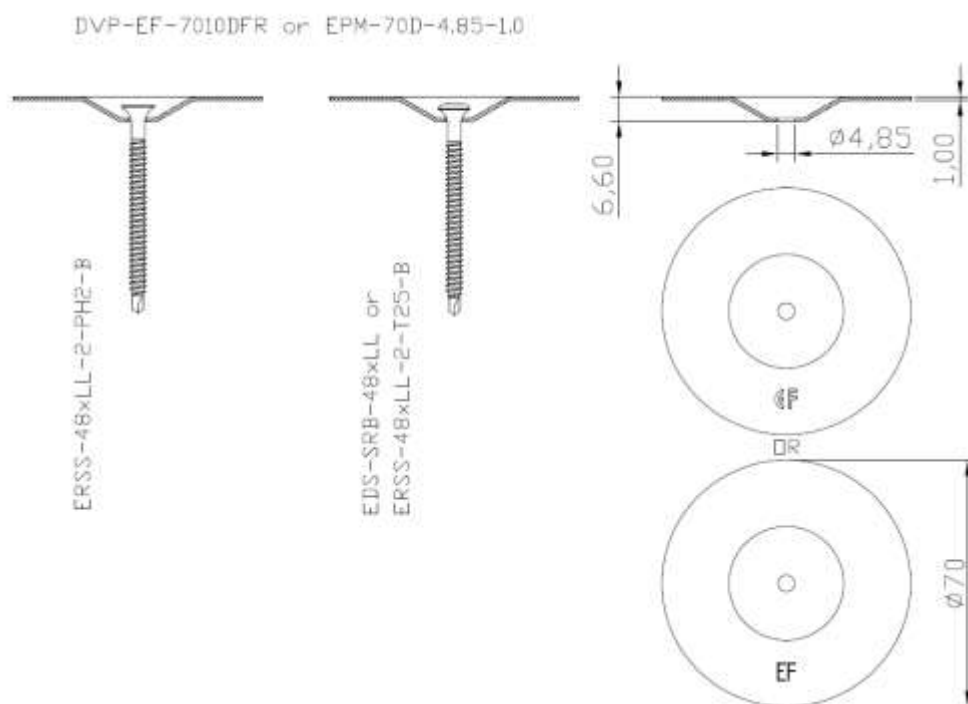
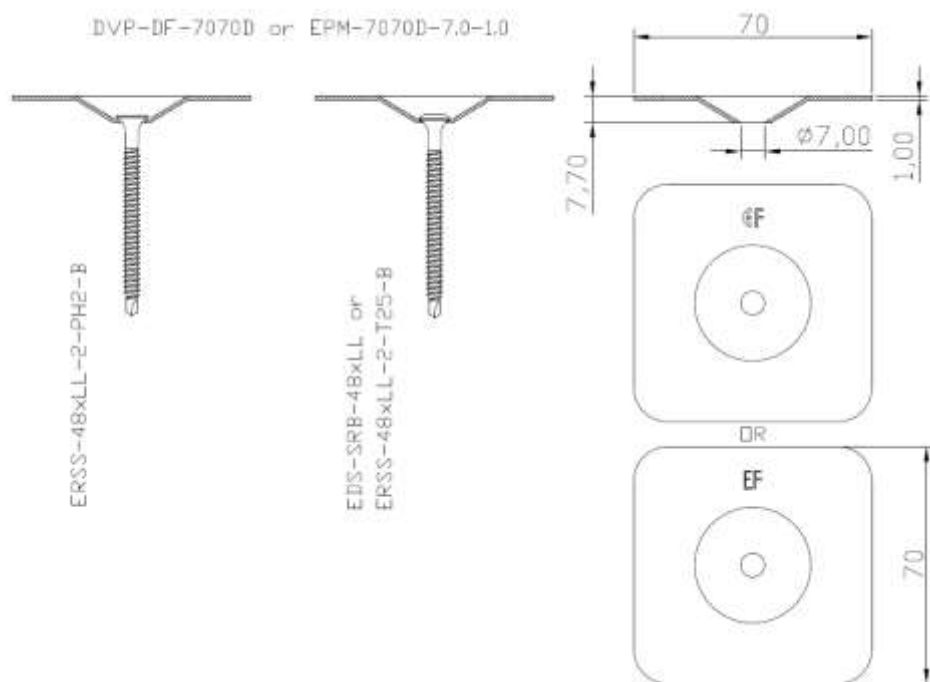


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.12

of European
Technical Assessment
ETA-23/0651

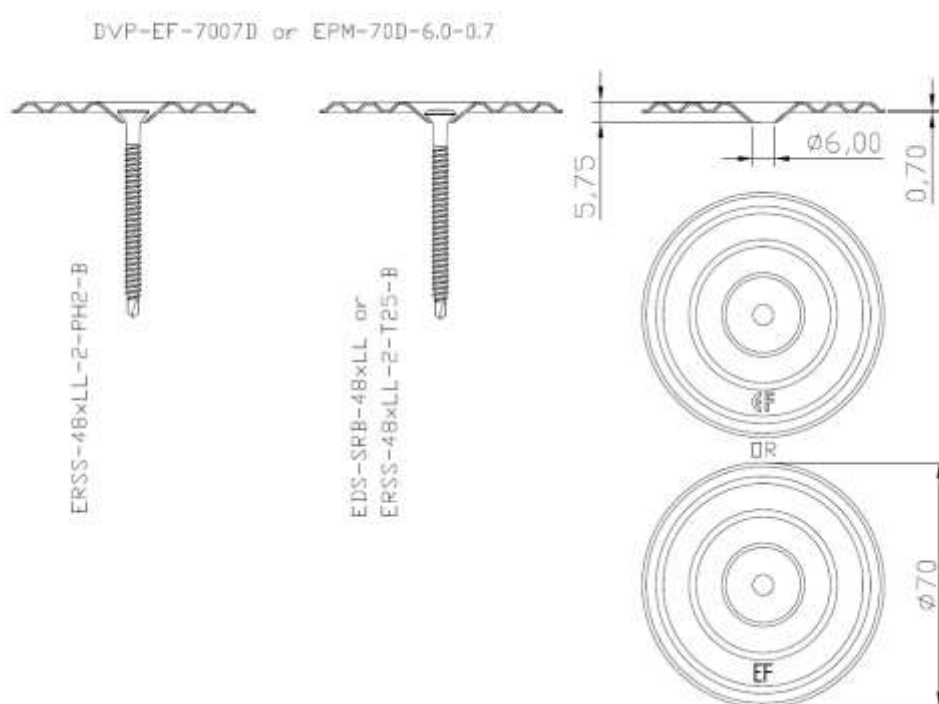
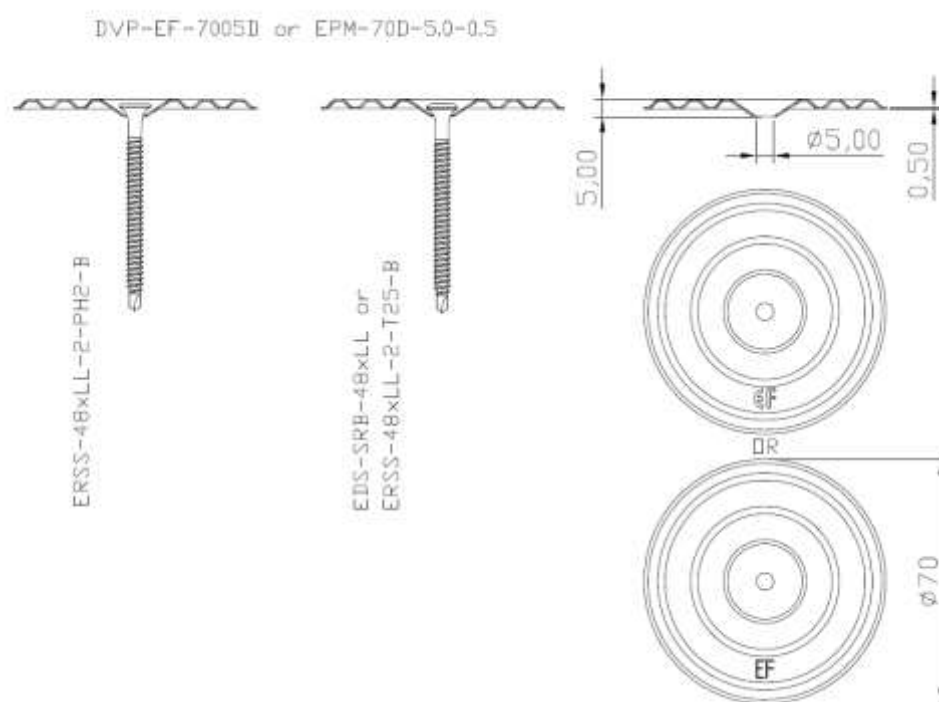


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.13

of European
Technical Assessment
ETA-23/0651

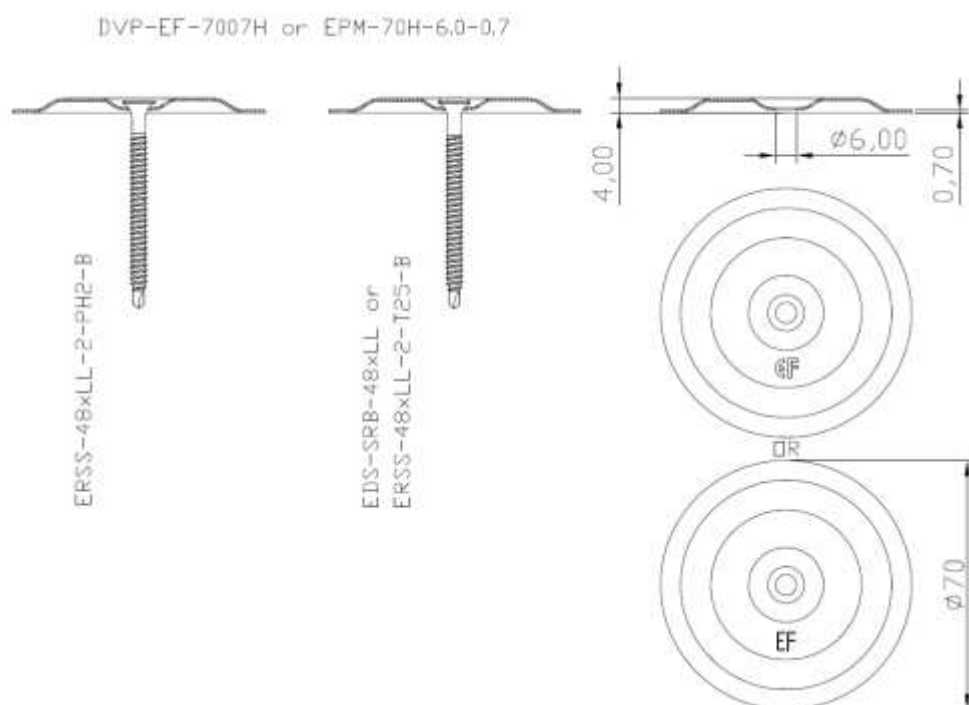
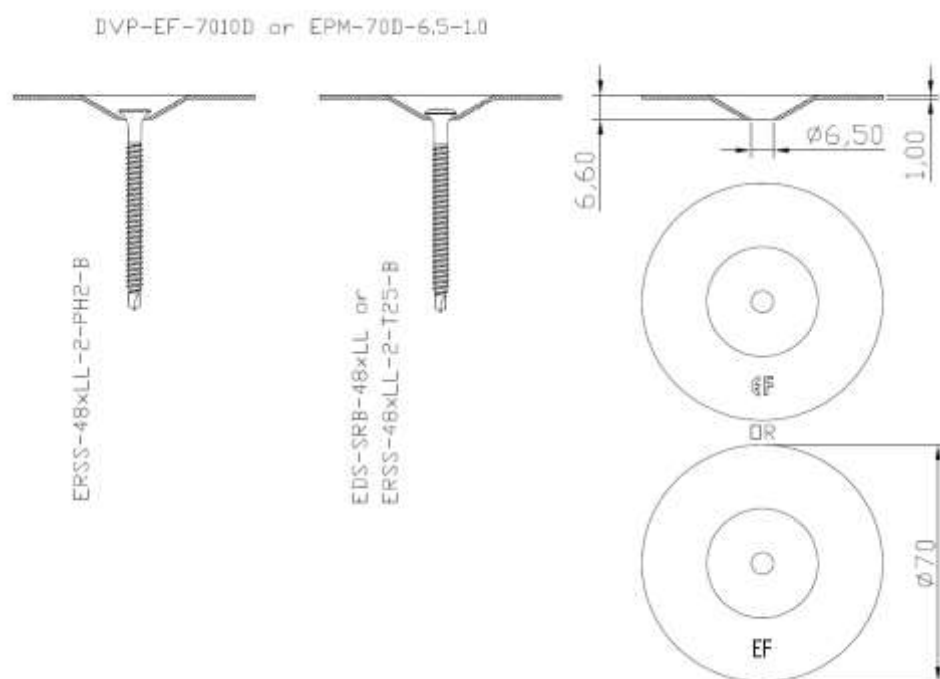


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.14



of European
Technical Assessment
ETA-23/0651

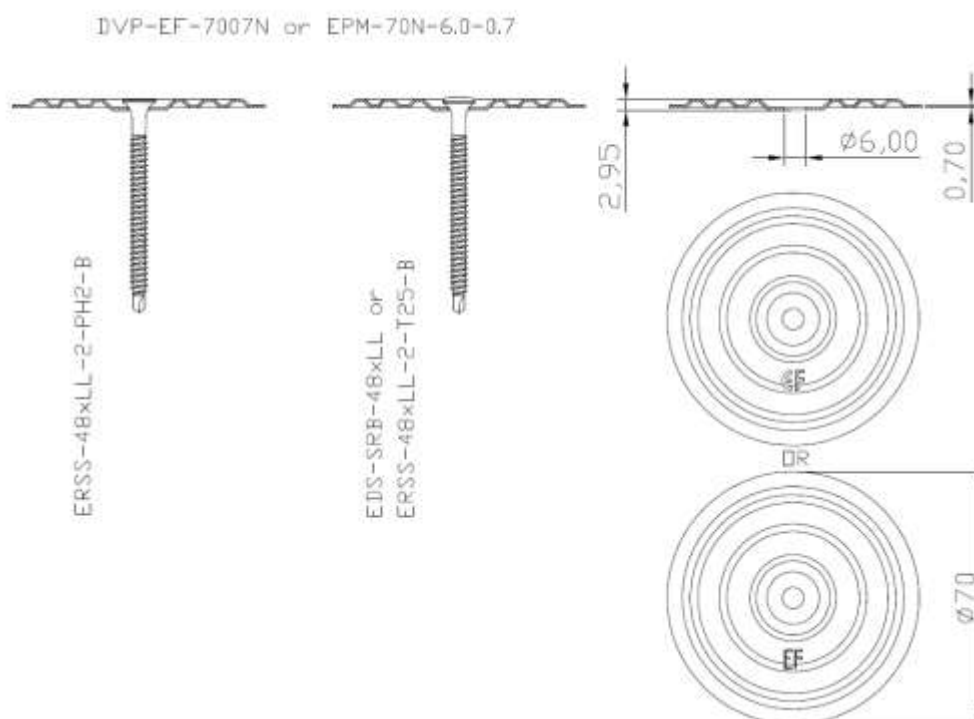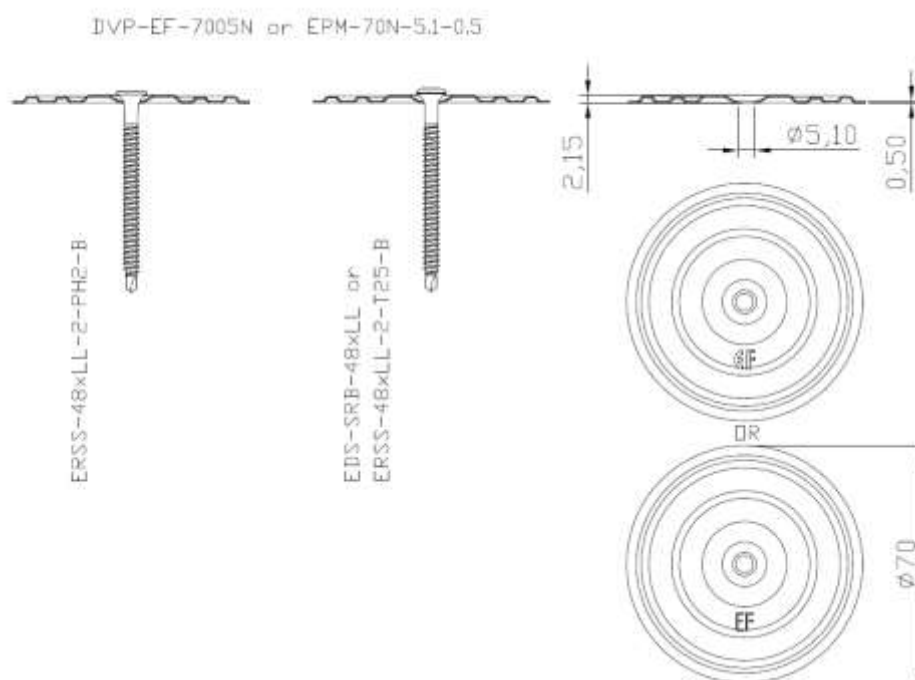

Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.15
of European
Technical Assessment
ETA-23/0651

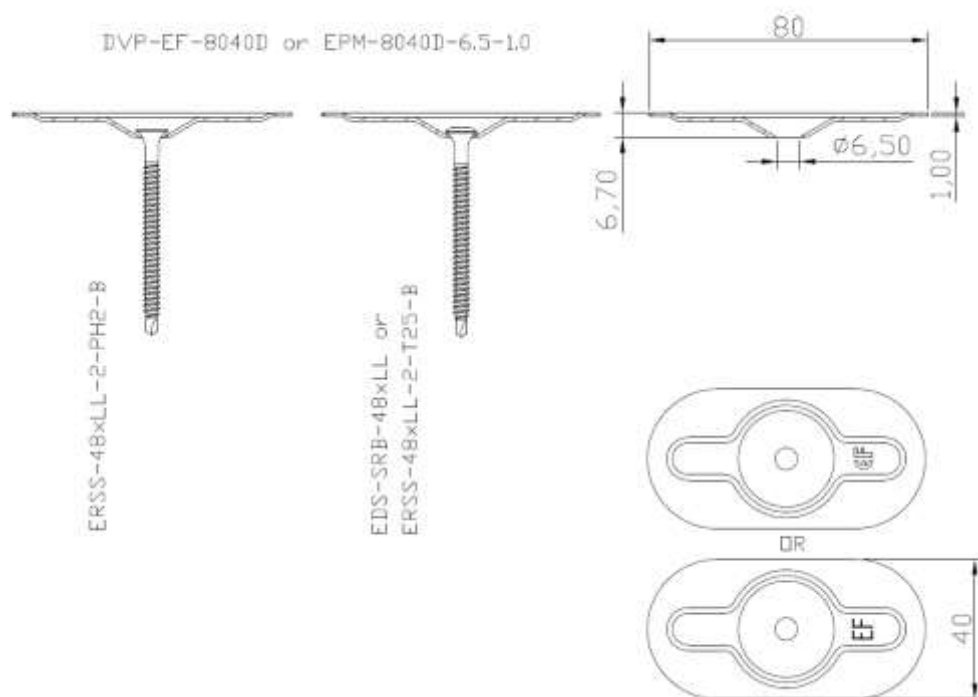
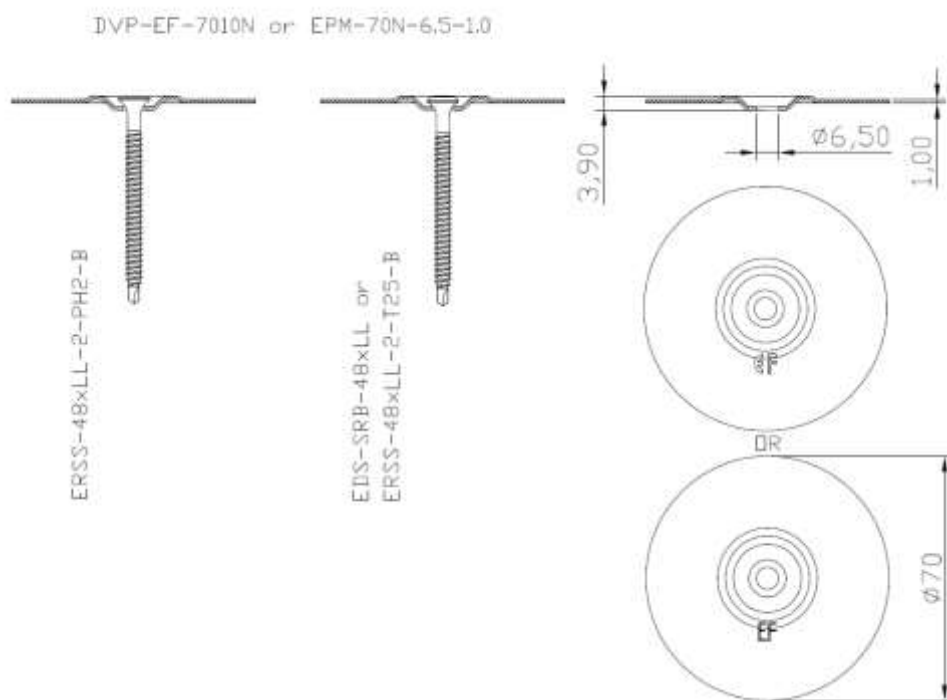


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.16

of European
Technical Assessment
ETA-23/0651

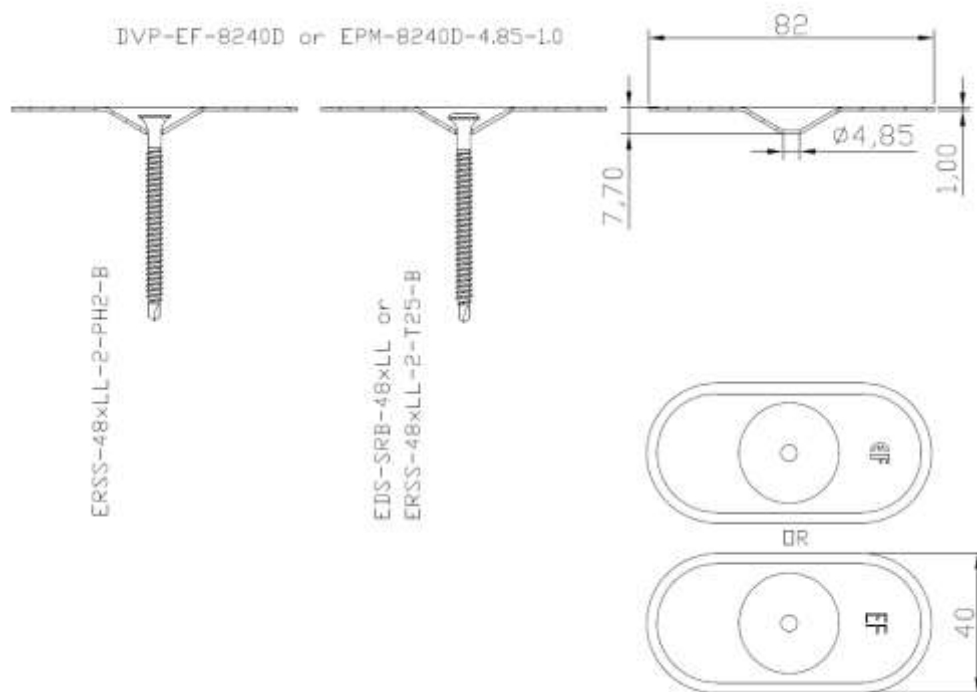
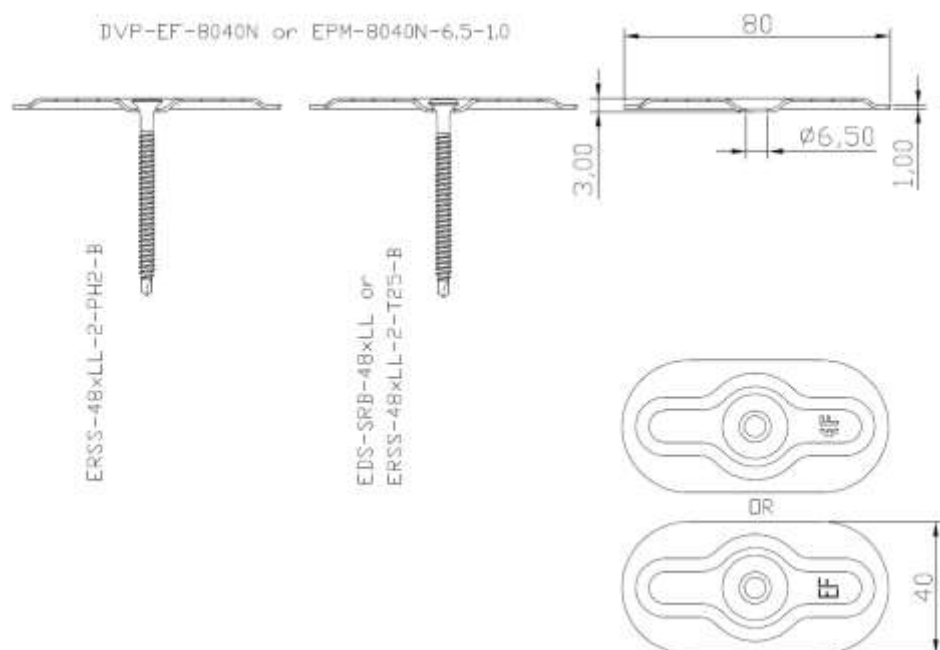


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.17

of European
Technical Assessment
ETA-23/0651

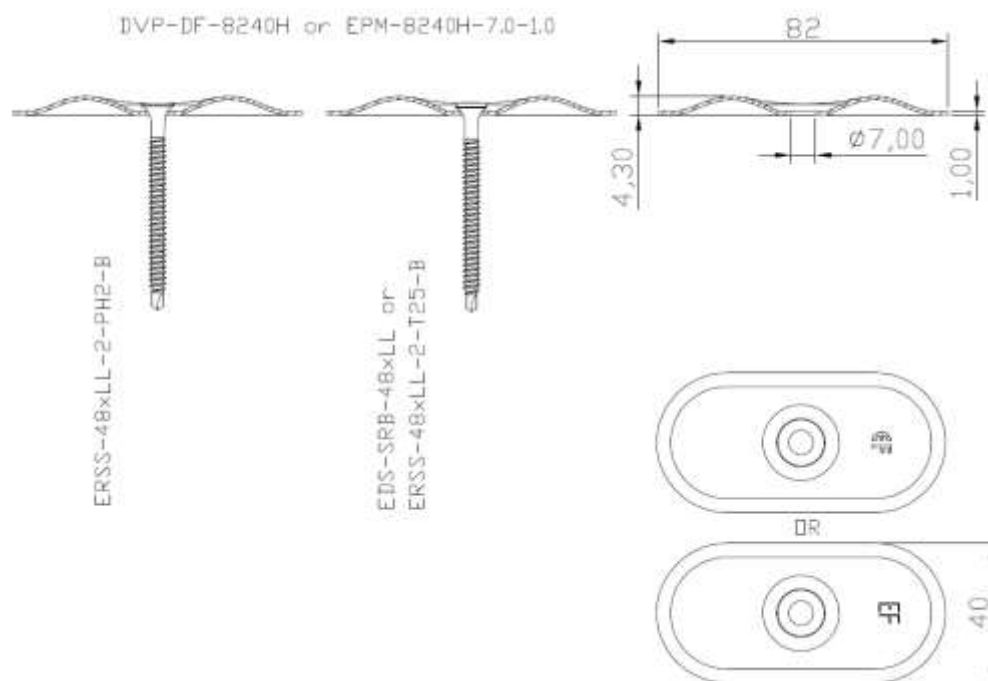
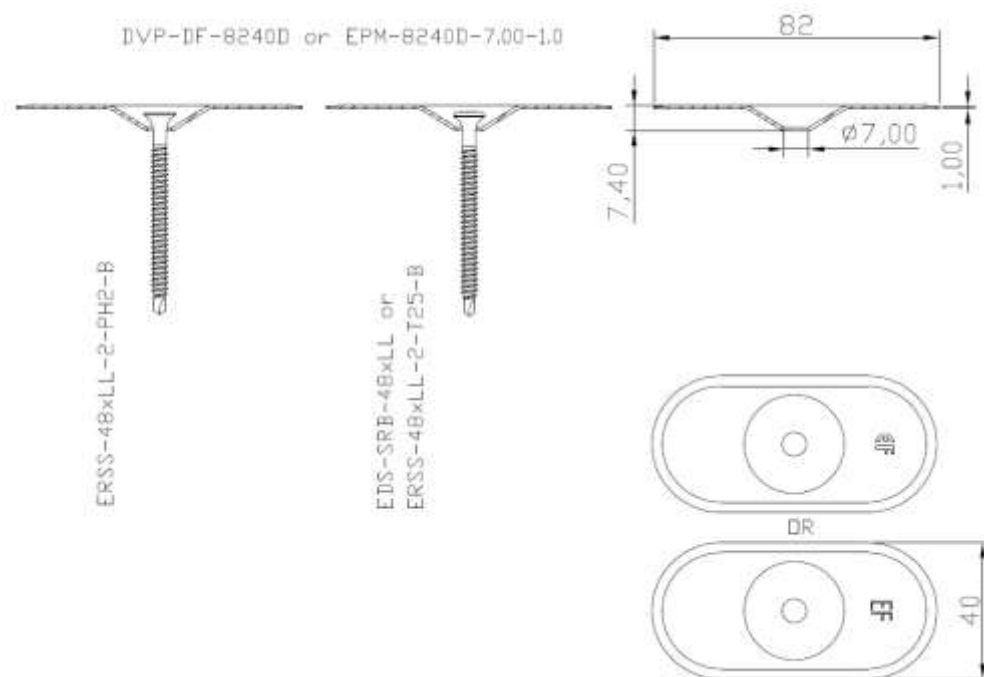


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.18

of European
Technical Assessment
ETA-23/0651

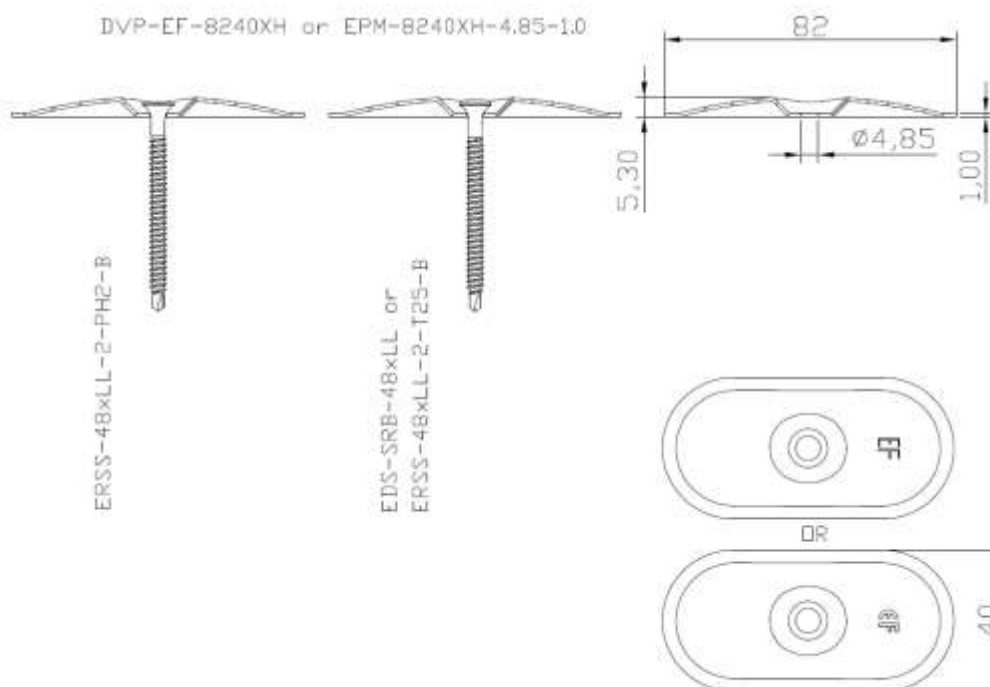
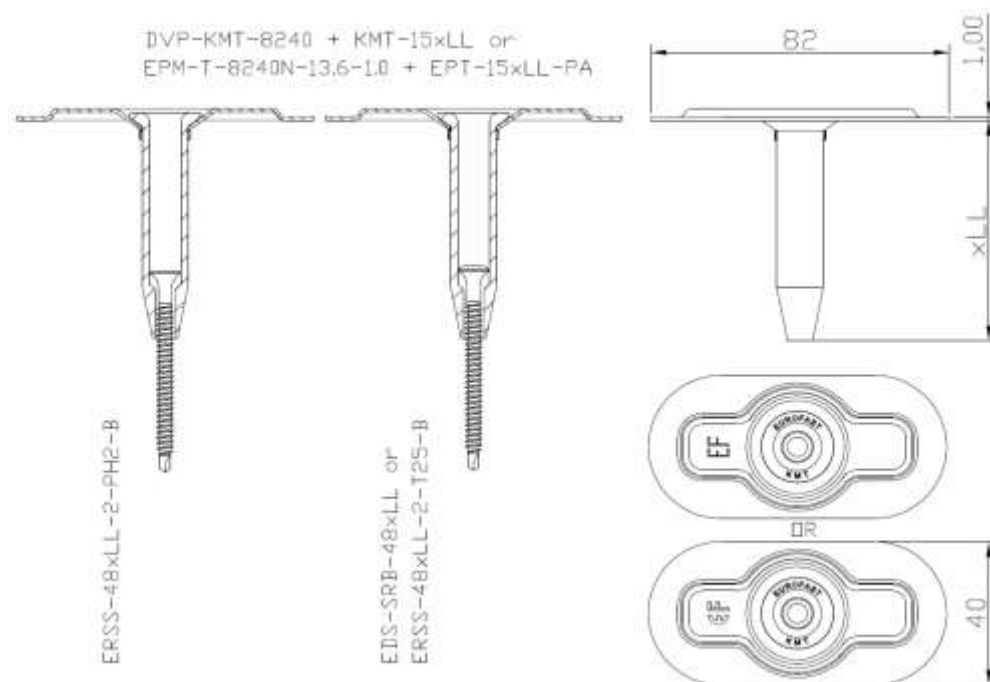


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.19

of European
Technical Assessment
ETA-23/0651

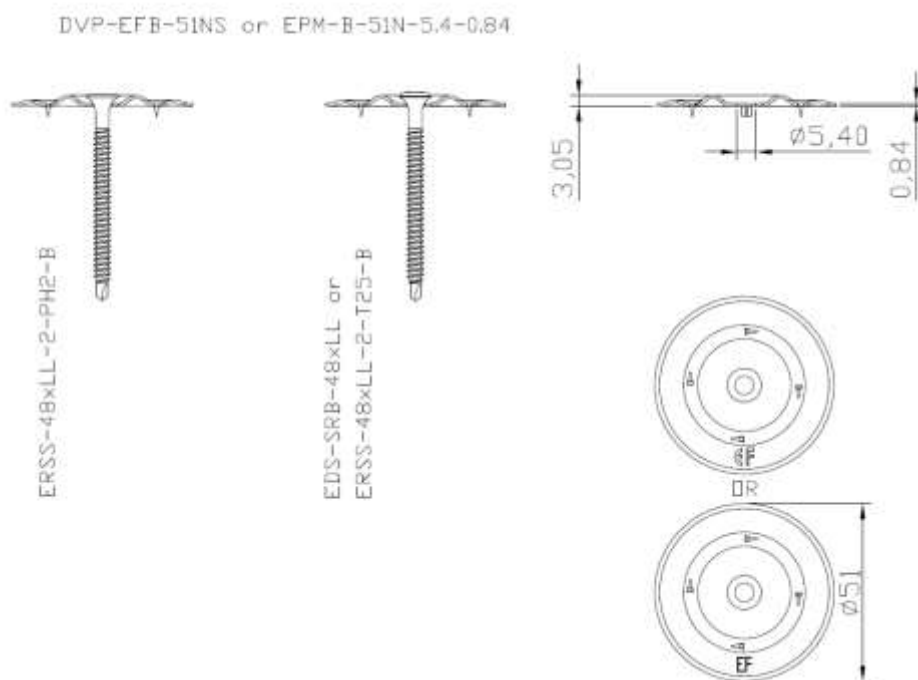
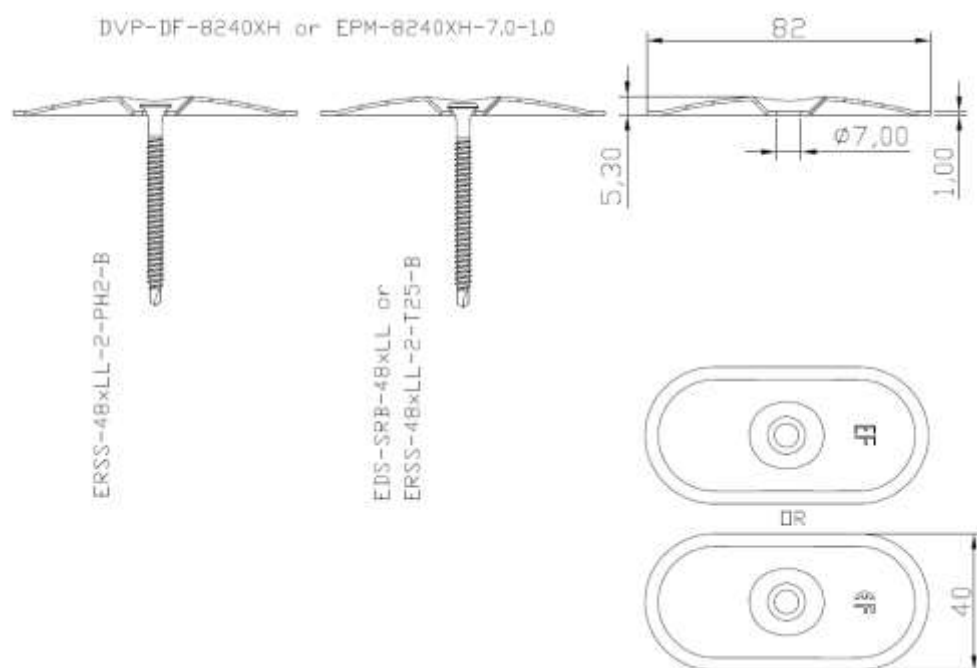


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.20



of European
Technical Assessment
ETA-23/0651

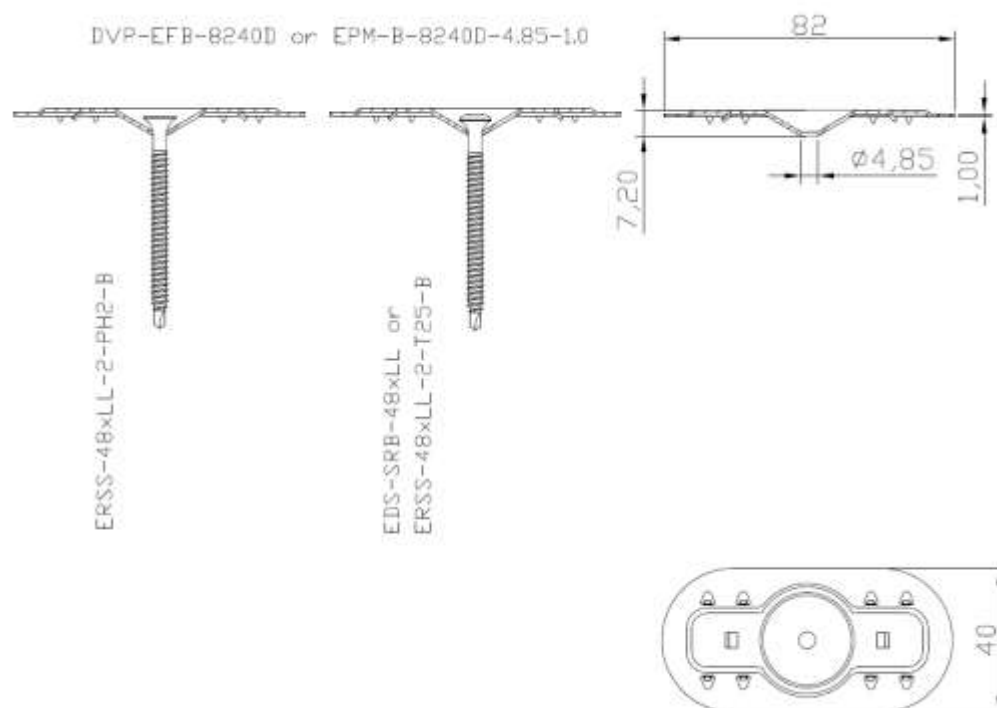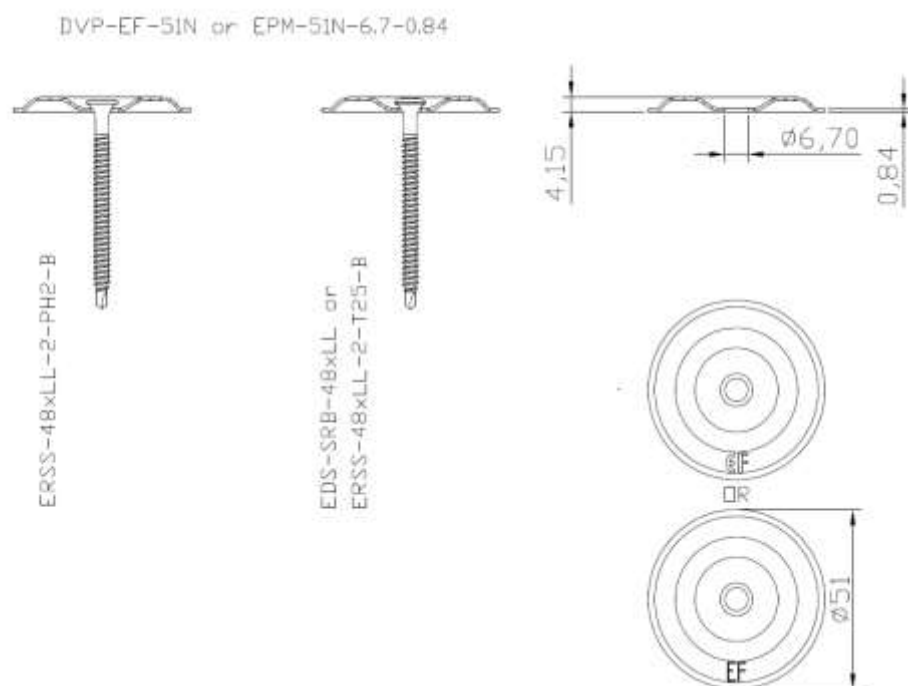

Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.21
of European
Technical Assessment
ETA-23/0651

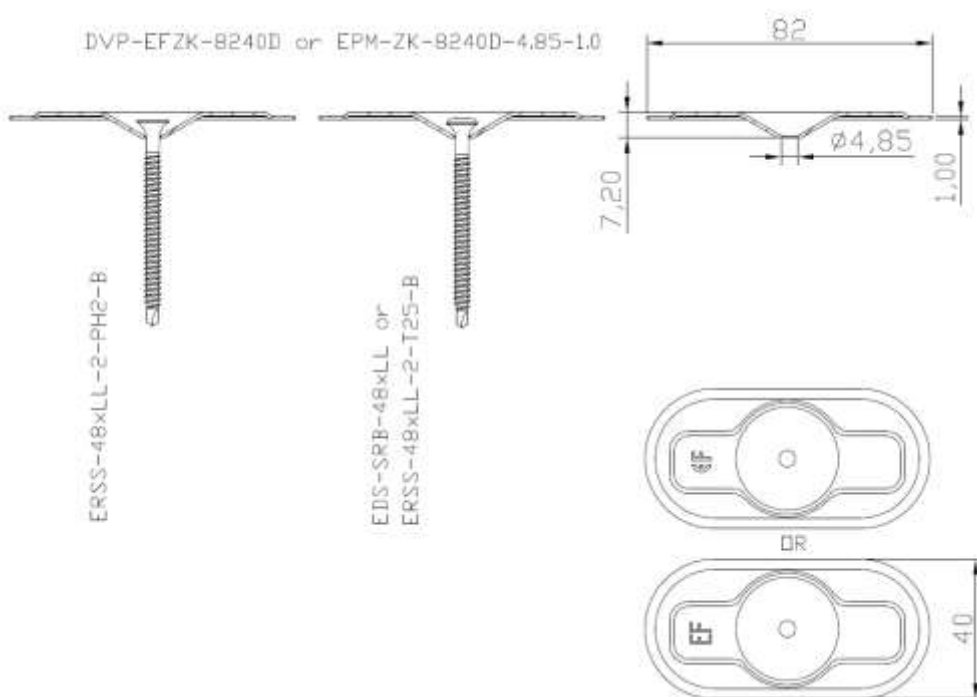
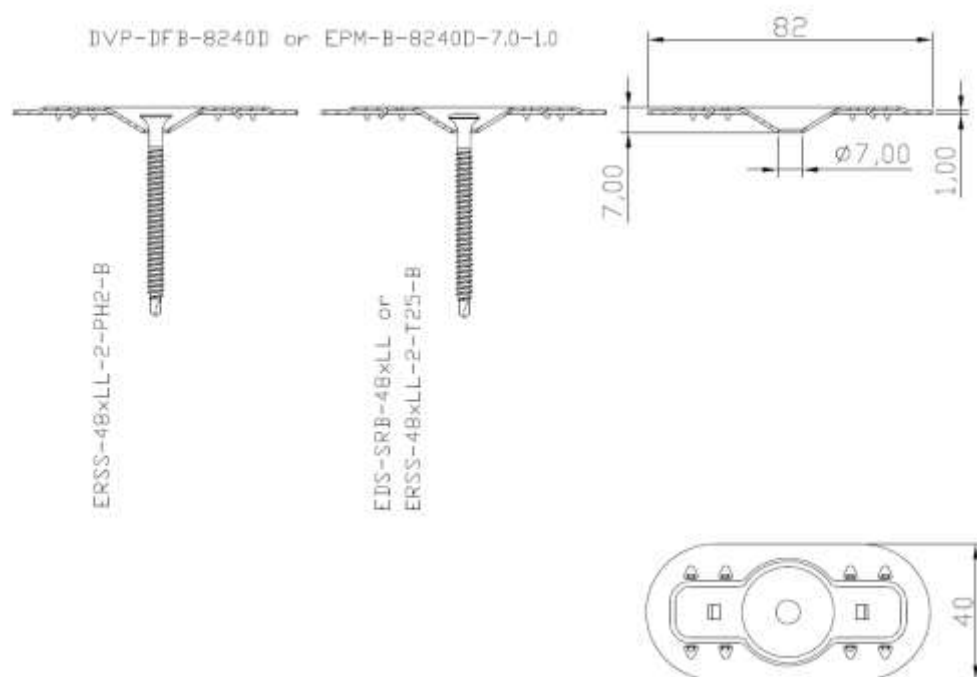


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.22

of European
Technical Assessment
ETA-23/0651

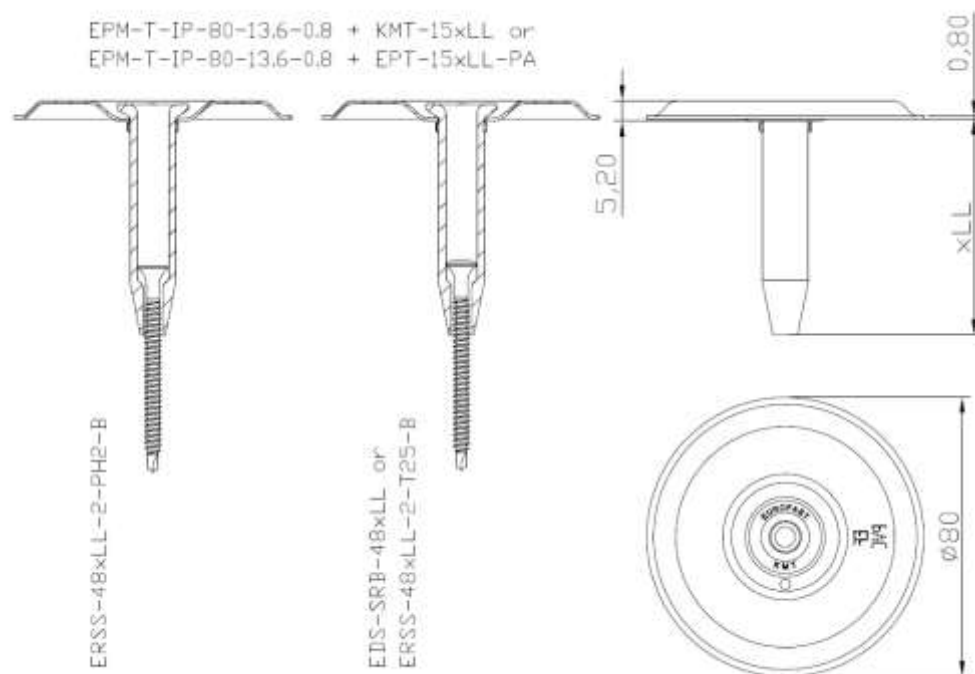
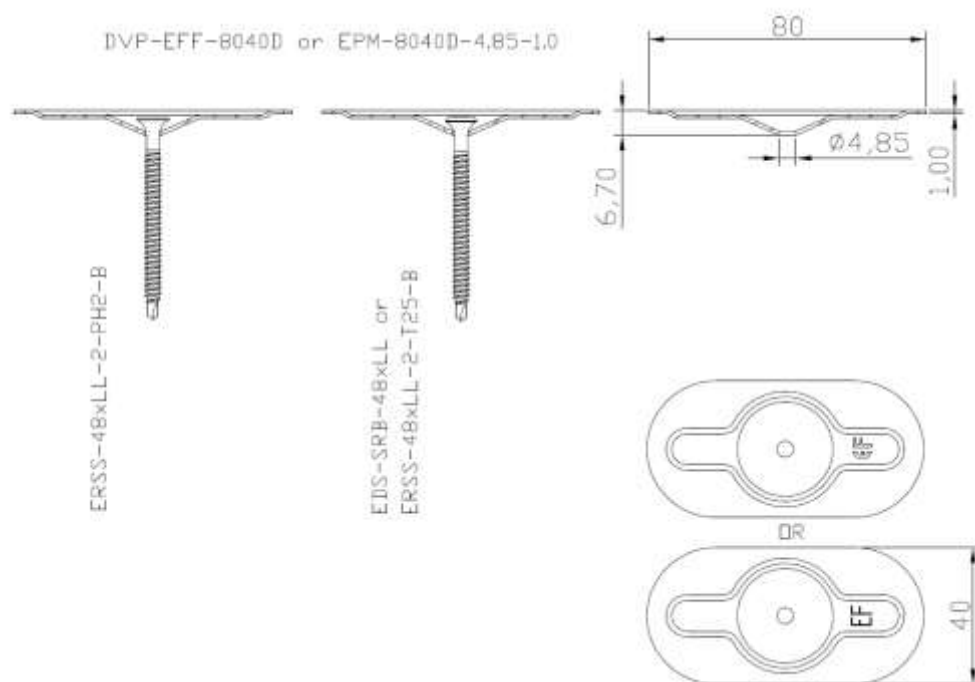


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.23

of European
Technical Assessment
ETA-23/0651

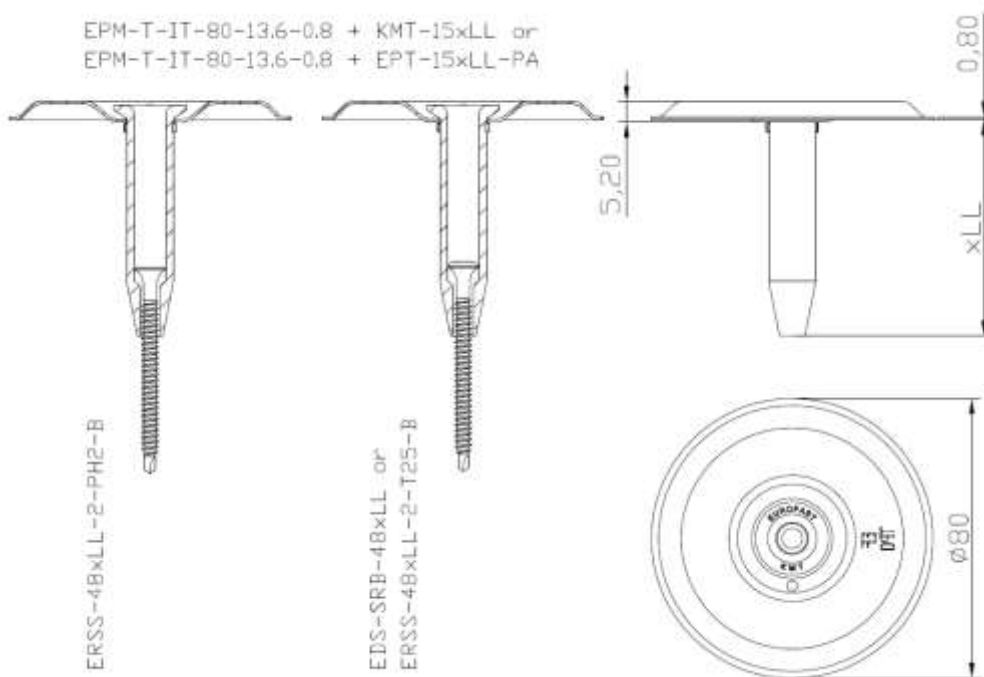
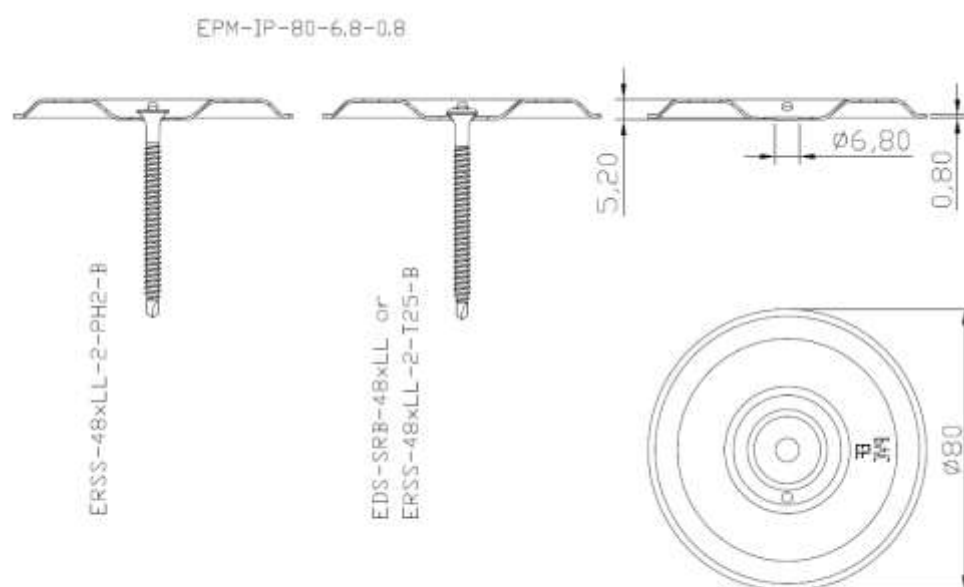




Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.24

of European
Technical Assessment
ETA-23/0651

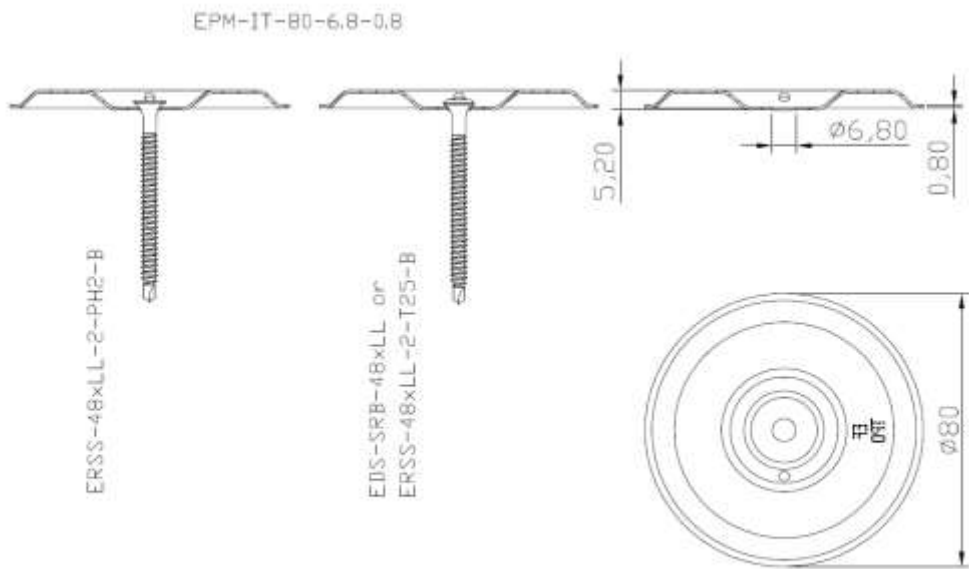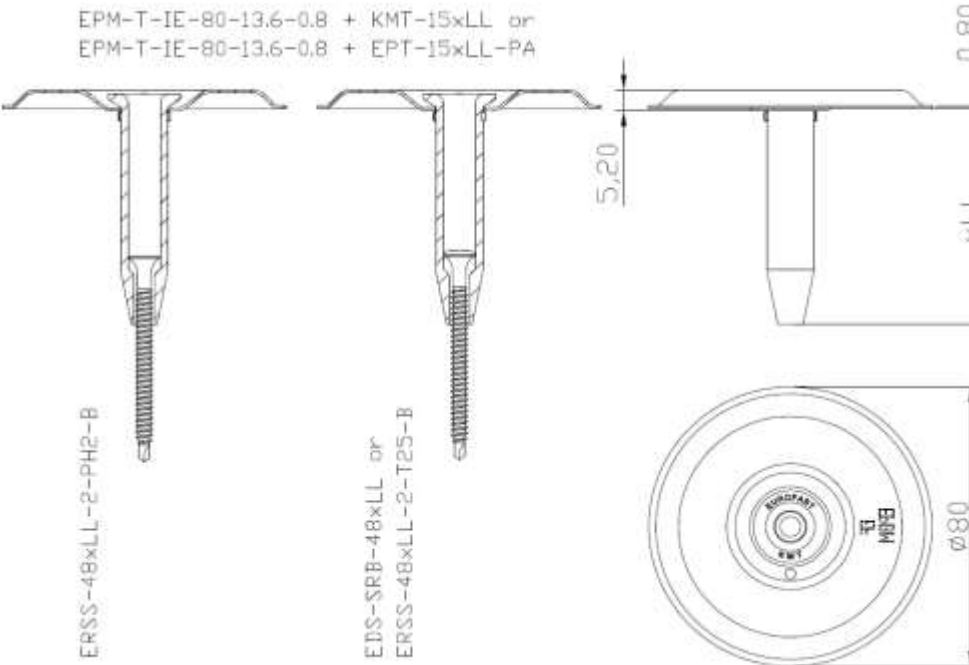	
	
Eurofast Flat Roof Fasteners	Annex D.25 of European Technical Assessment ETA-23/0651
EDS-SRB-48xLL (ERSS-48xLL-2-T25-B) (ERSS-48xLL-2-PH2-B)	

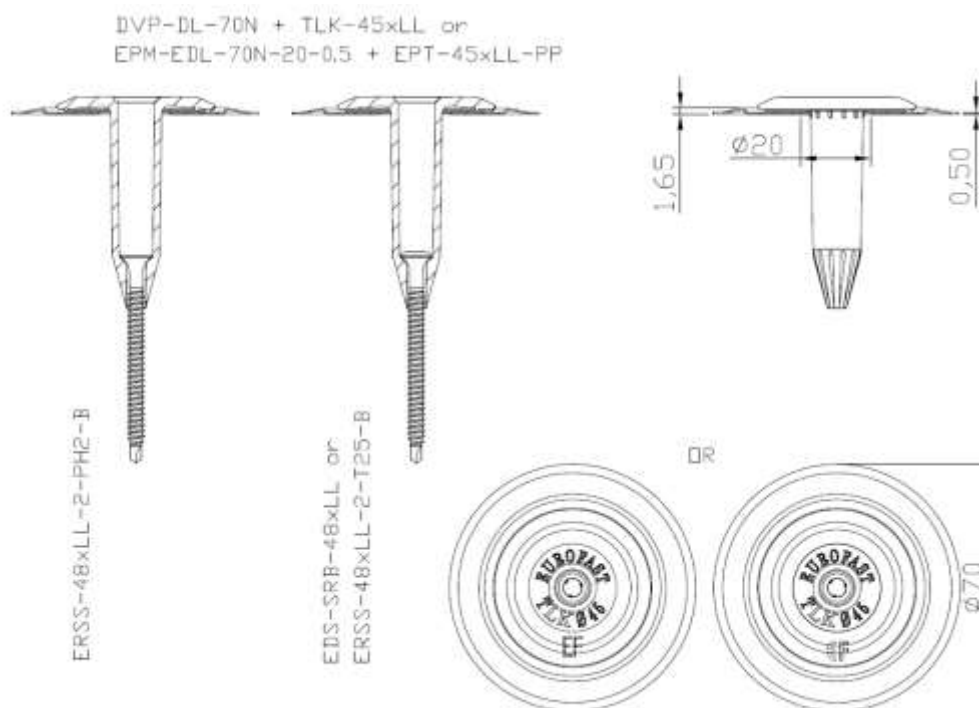
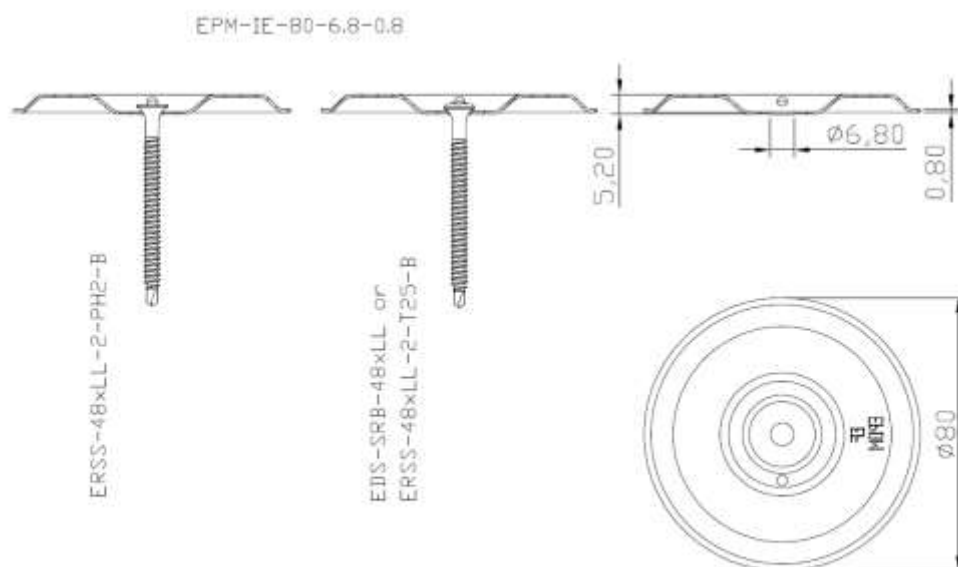


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.26

of European
Technical Assessment
ETA-23/0651

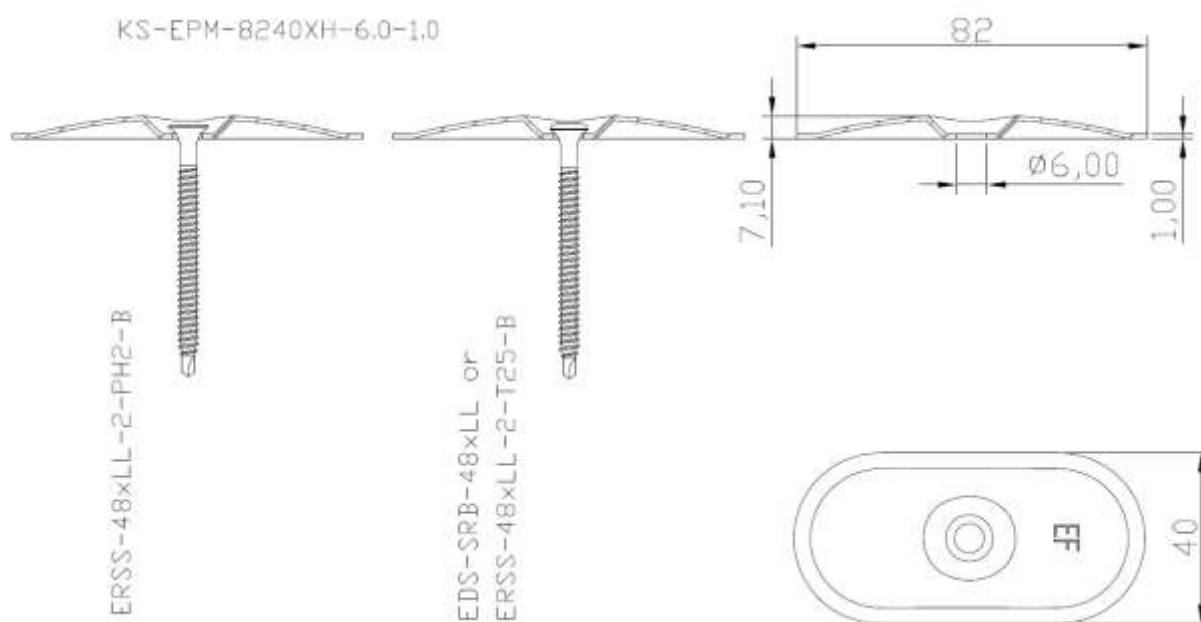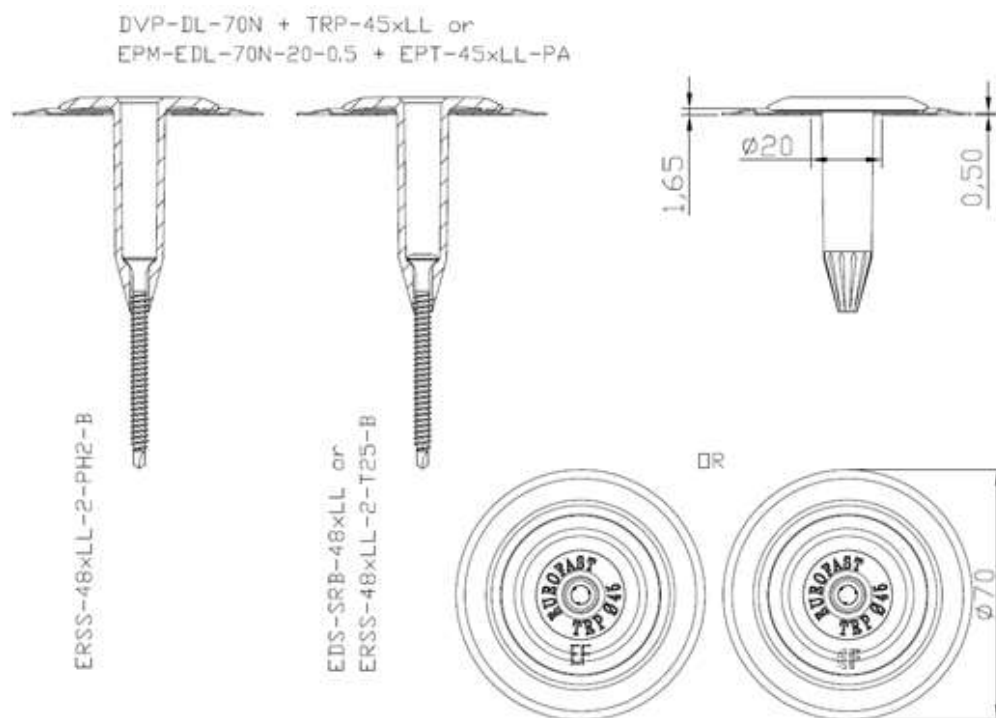


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.27

of European
Technical Assessment
ETA-23/0651

EBS-xxxxx-25-7.1-1.25 or
BC-EBS-xxxxx-25-7.1-1.25

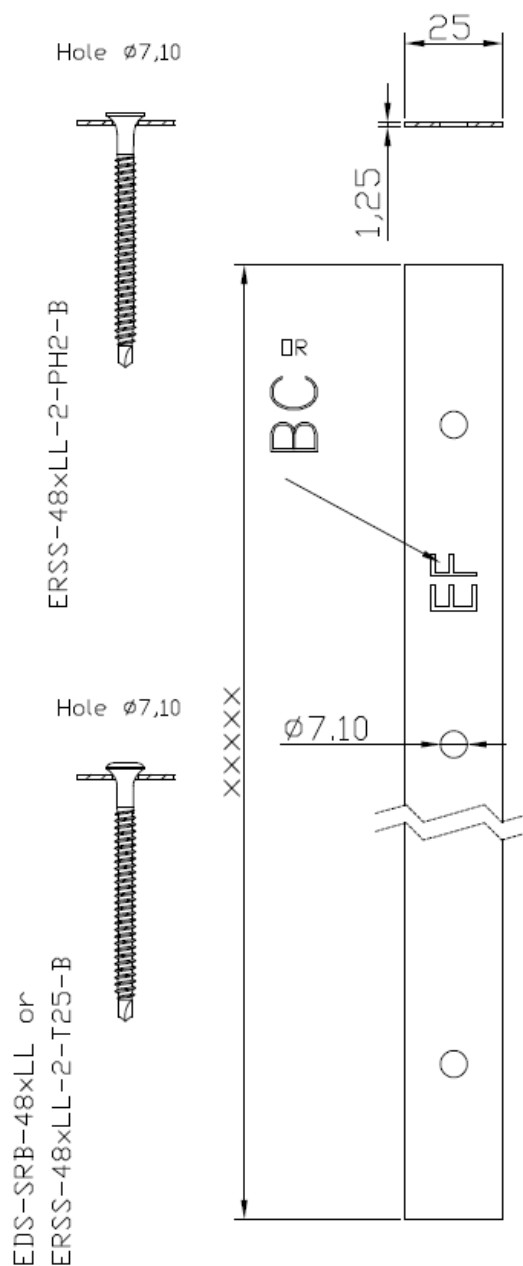


Eurofast Flat Roof Fasteners

EDS-SRB-48xLL (ERSS-48xLL-2-T25-B)
(ERSS-48xLL-2-PH2-B)

Annex D.28

of European
Technical Assessment
ETA-23/0651

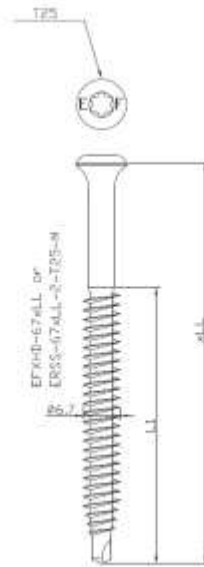

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)										
Steel S320GD *										
t [mm]	0,50	0,60	0,63	0,70	0,75	0,80	0,88	1,00	1,25	1,50
EFXHD-67xLL (ERSS-67xLL-2-T25-M)	1,10	1,52	1,52	1,98	2,09	2,59	2,59	2,94	3,48	3,48

* when using steel S280GD, values must be reduced by 8%

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)								
OSB/3								
t [mm]	16	18	21	25	19	18	21	24
EFXHD-67xLL (ERSS-67xLL-2-T25-M)	0,67	0,95	1,12	1,42	0,94	0,94	1,25	1,61

Characteristic Values of Axial Pull-Through * Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)					
EFXHD-67xLL (ERSS-67xLL-2-T25-M)	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)	DVP-EF-5010D (EPM-50D-6.3-1.0)	DVP-DF-7070D (EPM-7070D-7.0-1.0)	DVP-EF-51N (EPM-51N-6.7-0.84)	EPM-51N-5.6-0.84
	DVP-EF-7010D (EPM-70D-6.5-1.0)	DVP-EF-5010N (EPM-50N-6.3-1.0)	DVP-DF-8240D (EPM-8240D-7.0-1.0)	-	EPM-IP-80-6.8-0.8
	DVP-EF-7010N (EPM-70N-6.5-1.0)	-	DVP-DF-8240H (EPM-8240H-7.0-1.0)	-	EPM-IT-80-6.8-0.8
	DVP-EF-8040D (EPM-8040D-6.5-1.0)	-	DVP-DF-8240XH (EPM-8240XH-7.0-1.0)	-	EPM-IE-80-6.8-0.8
	DVP-EF-8040N (EPM-8040N-6.5-1.0)	-	DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)	-	-
	-	-	EBS-xxxxx-25-7.1-1.25 (BC-EBS-xxxxx-25-7.1-1.25)	-	-
EFXHD-67xLL (ERSS-67xLL-2-T25-M)	5,05	3,89	2,96	2,93	2,92

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

EFXHD-67xLL (ERSS-67xLL-2-T25-M)


Annex E.1
of European
Technical Assessment
ETA-23/0651

Characteristic Values of Axial Pull-Through * Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	-	TLK-45xLL (EPT-45xLL-PP)	HTLK-45xLL (EPT-O-45xLL-PP)
	TRP-45xLL (EPT-45xLL-PA)	TLK-75xLL (EPT-75xLL-PP)	-
	BTRP-45xLL (EPT-B-45xLL-PA)	DVP-DL-70N + TLK-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)	-
	TWP-8040xLL (EPT-8040xLL-PA)	-	-
	EDF-BAR F-TUBE + KMT-15xLL (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)	-	-
	DVP-KMT-8240 + KMT-15xLL (EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)	-	-
	EPM-T-IP-80-13.6-0.8 + KMT-15xLL (EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IT-80-13.6-0.8 + KMT-15xLL (EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IE-80-13.6-0.8 + KMT-15xLL (EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	DVP-DL-70N + TRP-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)	-	-
EFXHD-67xLL (ERSS-67xLL-2-T25-M)	2,64	1,68	1,78

* "Pull-over" according to CEN/TS 17659:2021

Screw: EFXHD-67xLL (ERSS-67xLL-2-T25-M)			
Metal pressure plate: DVP-EF-5010D (EPM-50D-6.3-1.0) DVP-KMT-8240 + KMT-15xLL (EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA) DVP-EF-5010N (EPM-50N-6.3-1.0) EPM-T-IP-80-13.6-0.8 + KMT-15xLL (EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA) DVP-DF-7070D (EPM-7070D-7.0-1.0) EPM-T-IT-80-13.6-0.8 + KMT-15xLL (EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA) DVP-EF-7010D (EPM-70D-6.5-1.0) EPM-T-IE-80-13.6-0.8 + KMT-15xLL (EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA) DVP-EF-7010N (EPM-70N-6.5-1.0) DVP-DL-70N + TRP-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PA) DVP-EF-8040D (EPM-8040D-6.5-1.0) DVP-DL-70N + TLK-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PP) DVP-EF-8040N (EPM-8040N-6.5-1.0) DVP-DF-8240D (EPM-8240D-7.0-1.0) DVP-DF-8240H (EPM-8240H-7.0-1.0) DVP-DF-8240XH (EPM-8240XH-7.0-1.0) DVP-EF-51N (EPM-51N-6.7-0.84) EPM-51N-5.6-0.84 (EPM-B-8240D-7.0-1.0) DVP-DFB-8240D EPM-IP-80-6.8-0.8 EPM-IT-80-6.8-0.8 EPM-IE-80-6.8-0.8			
Pressure plate with tube: TRP-45xLL (EPT-45xLL-PA) Termination bar: EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0) BTRP-45xLL (EPT-B-45xLL-PA) EDF-BAR F-TUBE + KMT-15xLL (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA) TWP-8040xLL (EPT-8040xLL-PA) EBS-xxxxx-25-7.1-1.25 (BC-EBS-xxxxx-25-7.1-1.25) TLK-45xLL (EPT-45xLL-PP) HTLK-45xLL (EPT-O-45xLL-PP) TLK-75xLL (EPT-75xLL-PP)			
Substrate: Steel S280 EN 10346 Steel S320 EN 10346 OSB/3 $\rho_{min} = 550 \text{ kg/m}^3$ EN 12369-1 Chipboard $\rho_{min} = 600 \text{ kg/m}^3$ EN 12369-1 Plywood $\rho_{min} = 400 \text{ kg/m}^3$ EN 12369-2 Timber, class $\geq$ C24 $\rho_{min} = 350 \text{ kg/m}^3$ EN 338			
Installation data: Max. drilling capacity in steel substrate: 2x1,50 mm Head type: Raised Bugle Head Recess: TX25 Fixing in steel substrate: Min. 20 mm of the screw fixed through the steel sheet Fixing in wooden and wood-based substrate: Full thread through the substrate or minimum embedment depth Installation force of installation tool in: - steel substrate 25 kg - wooden and wood-based substrate 35 kg Installation tool speed: 1600 - 1800 rpm			

Eurofast Flat Roof Fasteners	Annex E.2
EFXHD-67xLL (ERSS-67xLL-2-T25-M)	of European Technical Assessment ETA-23/0651


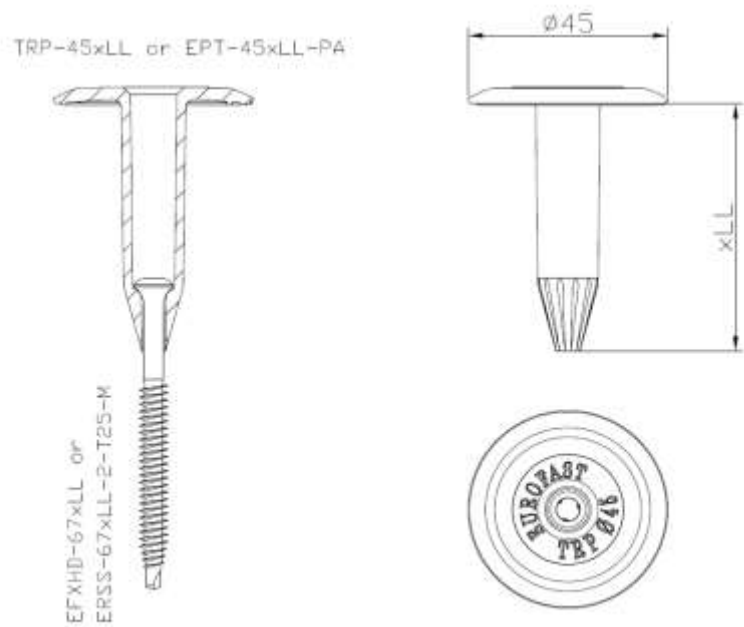


Eurofast Flat Roof Fasteners




EFXHD-67xLL (ERSS-67xLL-2-T25-M)

Annex E.3
of European
Technical Assessment
ETA-23/0651

BTRP-45xLL or EPT-B-45xLL-PA

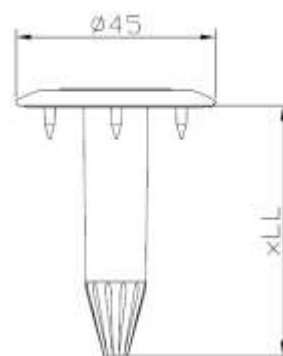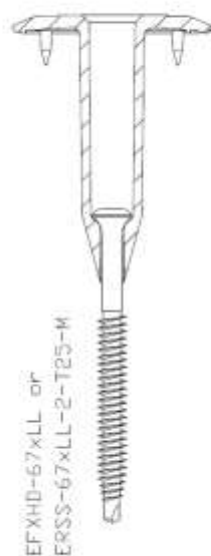

TWP-8040xLL or EPT-8040xLL-PA

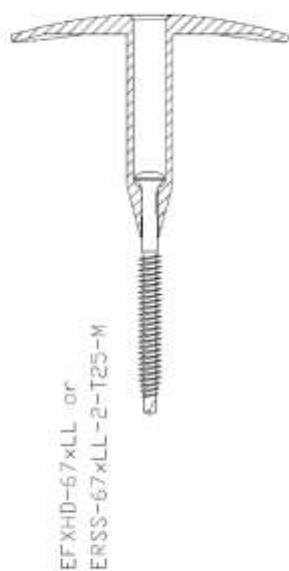


Eurofast Flat Roof Fasteners

EFXHD-67xLL (ERSS-67xLL-2-T25-M)


Annex E.4

of European
Technical Assessment
ETA-23/0651

EDF-BAR-F-TUBE + KMT-15xLL or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0
+ EPT-15xLL-PA

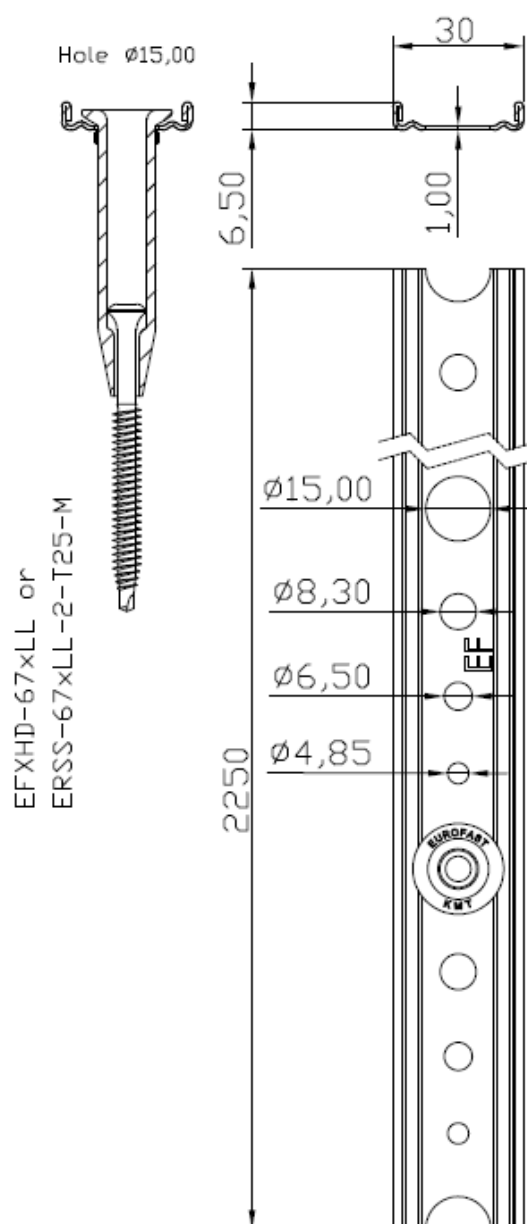

EDF-BAR-F-TUBE or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0


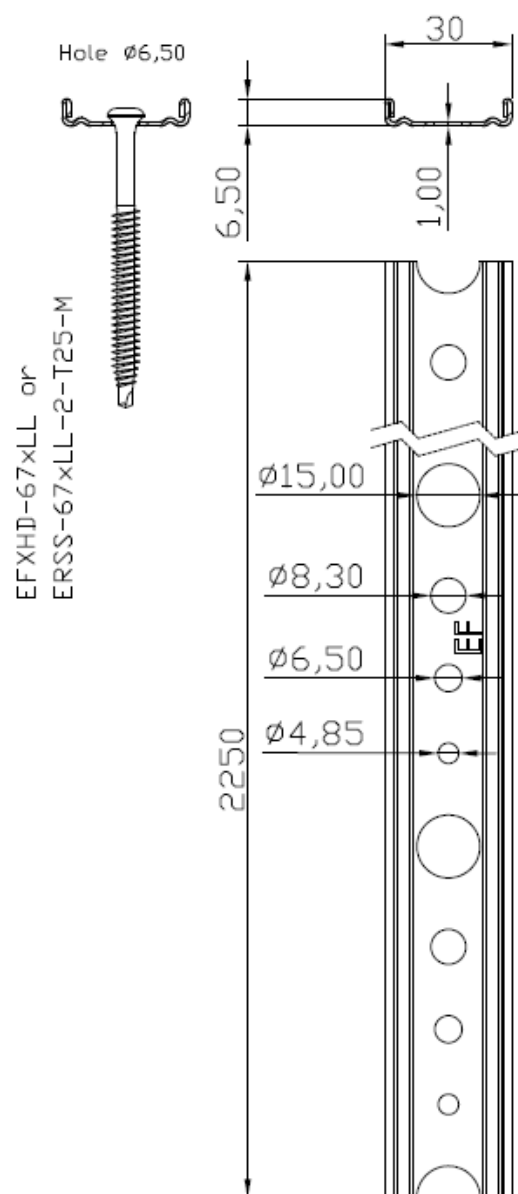


Eurofast Flat Roof Fasteners




EFXHD-67xLL (ERSS-67xLL-2-T25-M)

Annex E.5
of European
Technical Assessment
ETA-23/0651

TLK-45xLL or EPT-45xLL-PP

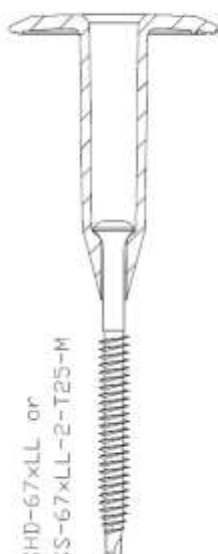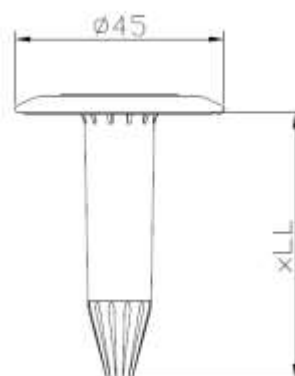
EFXHD-67xLL or
ERSS-67xLL-2-T25-M


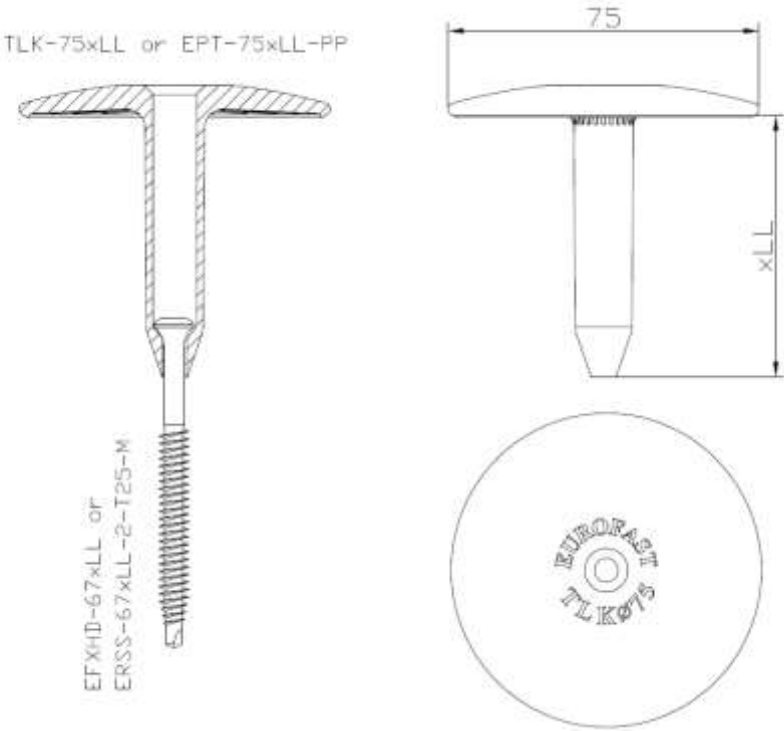
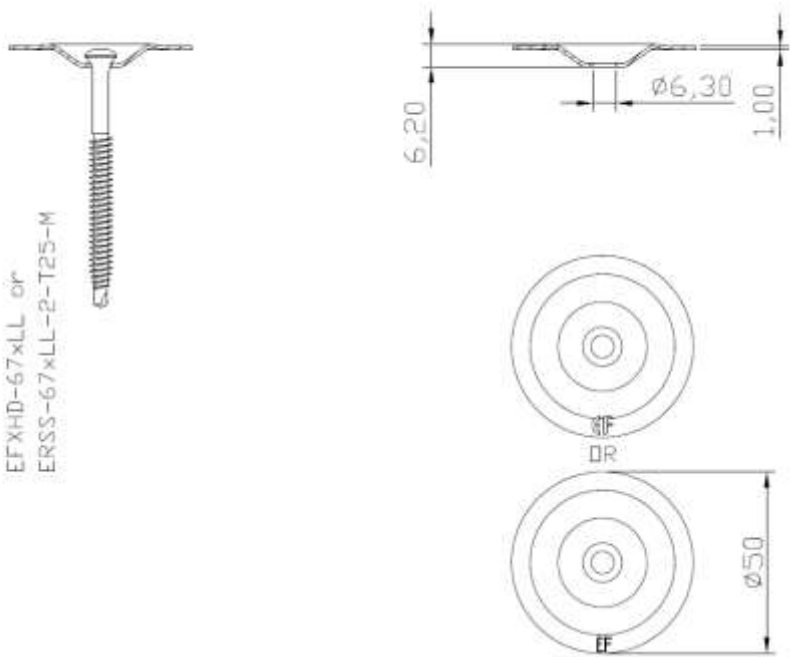
HTLK-45xLL or EPT-D-45xLL-PP

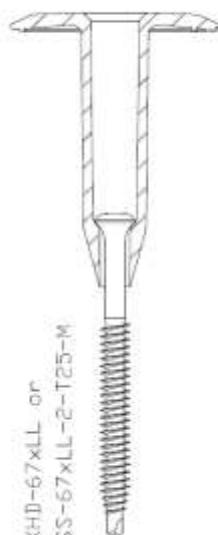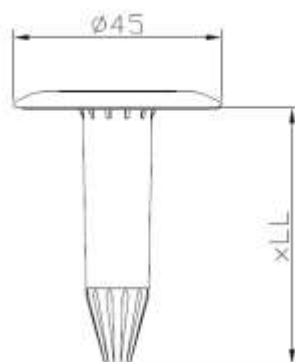
EFXHD-67xLL or
ERSS-67xLL-2-T25-M


Eurofast Flat Roof Fasteners

EFXHD-67xLL (ERSS-67xLL-2-T25-M)


Annex E.6
of European
Technical Assessment
ETA-23/0651

TLK-75xLL or EPT-75xLL-PP  EFXHD-67xLL or ERSS-67xLL-2-T25-M DVP-EF-5010D or EPM-50D-6,3-1.0  EFXHD-67xLL or ERSS-67xLL-2-T25-M	
Eurofast Flat Roof Fasteners	Annex E.7 of European Technical Assessment ETA-23/0651
EFXHD-67xLL (ERSS-67xLL-2-T25-M)	




DVP-EF-5010N or EPM-50N-6.3-1.0


EFXHD-67xLL or
ERSS-67xLL-2-T25-M



DR



DVP-DF-7070D or EPM-7070D-7.0-1.0

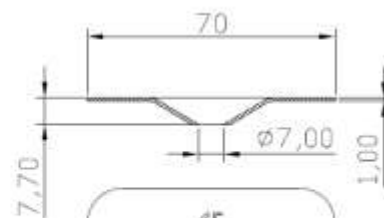
EFXHD-67xLL or
ERSS-67xLL-2-T25-M


DR





Eurofast Flat Roof Fasteners

EFXHD-67xLL (ERSS-67xLL-2-T25-M)



Annex E.8

of European
Technical Assessment
ETA-23/0651

DVP-EF-7010D or EPM-70D-6.5-1.0

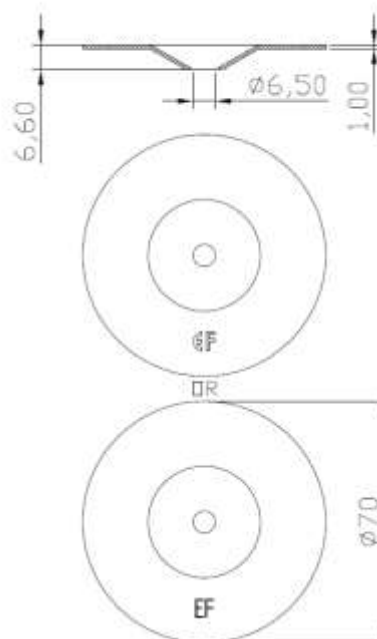EFXHD-67xLL or
ERSS-67xLL-2-T25-M

DVP-EF-7010N or EPM-70N-6.5-1.0



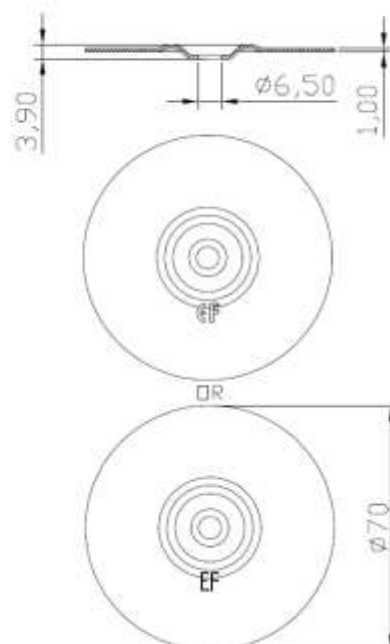
EFXHD-67xLL or
ERSS-67xLL-2-T25-M

Eurofast Flat Roof Fasteners


EFXHD-67xLL (ERSS-67xLL-2-T25-M)

Annex E.9
of European
Technical Assessment
ETA-23/0651




DVP-EF-8040D or EPM-8040D-6,5-1,0

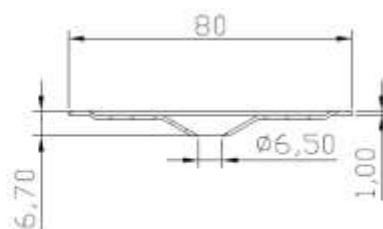
EFXHD-67xLL or
ERSS-67xLL-2-T25-M



OR



DVP-EF-8040N or EPM-8040N-6,5-1,0

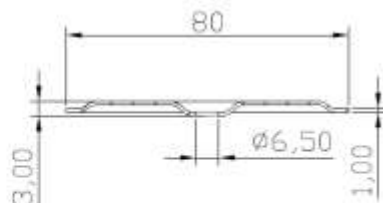
EFXHD-67xLL or
ERSS-67xLL-2-T25-M


OR





Eurofast Flat Roof Fasteners

EFXHD-67xLL (ERSS-67xLL-2-T25-M)

Annex E.10

of European
Technical Assessment
ETA-23/0651



DVP-DF-8240D or EPM-8240D-7,00-1,0

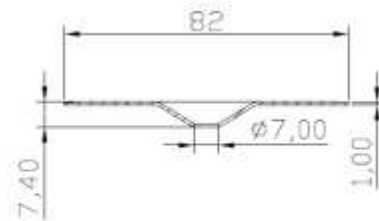EFXHD-67xLL or
ERSS-67xLL-2-T25-M


OR



DVP-DF-8240H or EPM-8240H-7,0-1,0

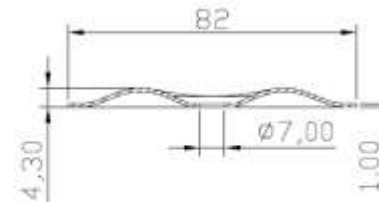EFXHD-67xLL or
ERSS-67xLL-2-T25-M

OR




Eurofast Flat Roof Fasteners

EFXHD-67xLL (ERSS-67xLL-2-T25-M)




Annex E.11

of European
Technical Assessment
ETA-23/0651


DVP-KMT-8240 + KMT-15xLL or
EPM-T-8240N-13,6-1.0 + EPT-15xLL-PA

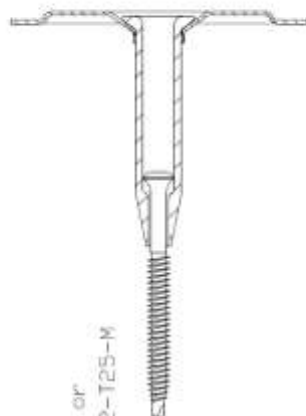



EFXHD-67xLL or
ERSS-67xLL-2-T25-M

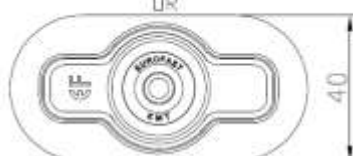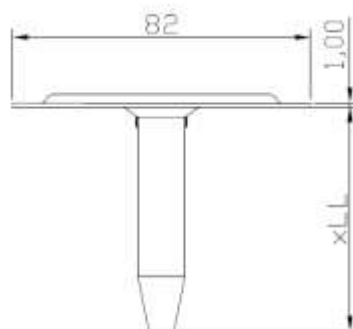

DVP-DF-8240XH or EPM-8240XH-7.0-1.0



EFXHD-67xLL or
ERSS-67xLL-2-T25-M


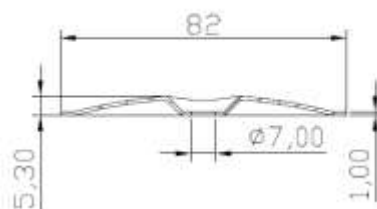


Eurofast Flat Roof Fasteners







EFXHD-67xLL (ERSS-67xLL-2-T25-M)

Annex E.12

of European
Technical Assessment
ETA-23/0651

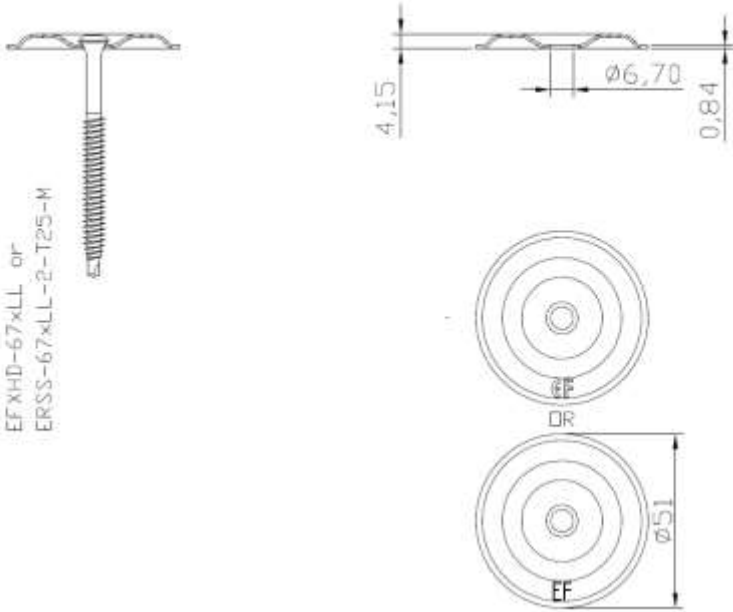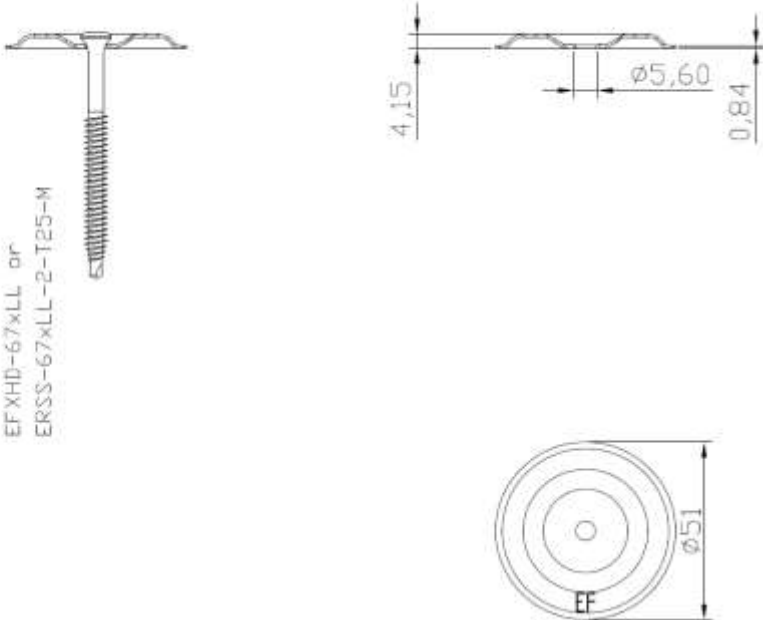DVP-EF-51N or EPM-51N-6.7-0.84 	
EPM-51N-5.6-0.84 	
Eurofast Flat Roof Fasteners	Annex E.13 of European Technical Assessment ETA-23/0651
EFXHD-67xLL (ERSS-67xLL-2-T25-M)	

DVP-DFB-8240D or EPM-B-8240D-7,0-1,0

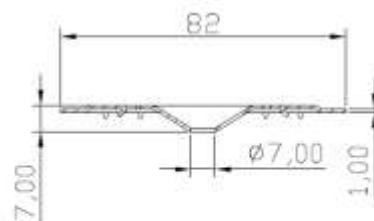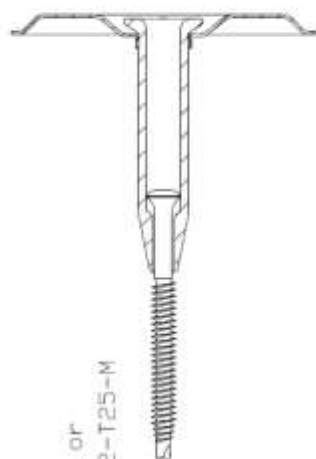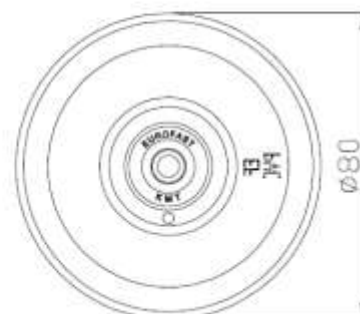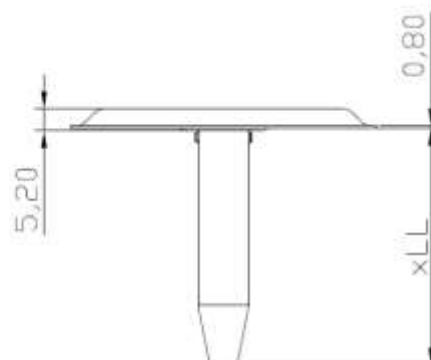

EFXHD-67xLL or
ERSS-67xLL-2-T25-M

EPM-T-IP-80-13,6-0,8 + KMT-15xLL or
EPM-T-IP-80-13,6-0,8 + EPT-15xLL-PA

EFXHD-67xLL or
ERSS-67xLL-2-T25-M


Eurofast Flat Roof Fasteners


EFXHD-67xLL (ERSS-67xLL-2-T25-M)

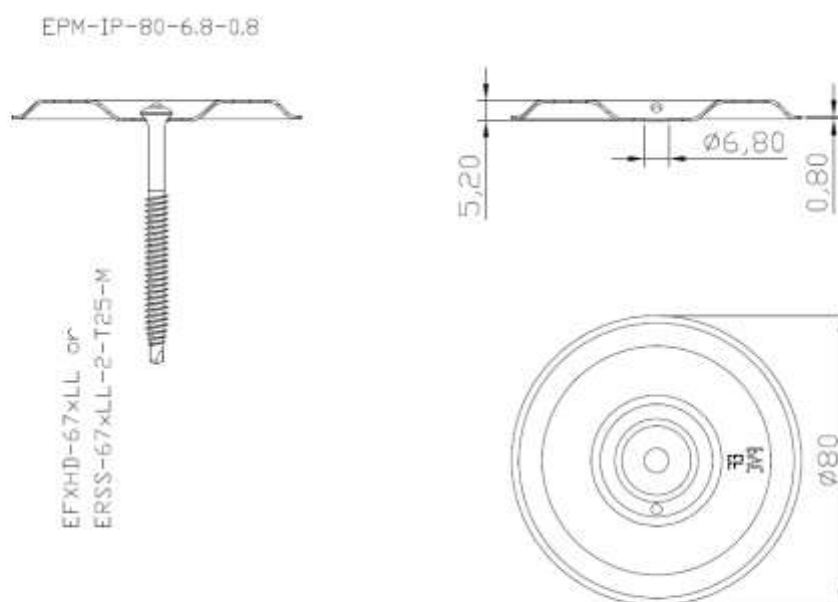Annex E.14

of European
Technical Assessment
ETA-23/0651



EPM-T-IT-80-13.6-0.8 + KMT-15xLL or
EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA


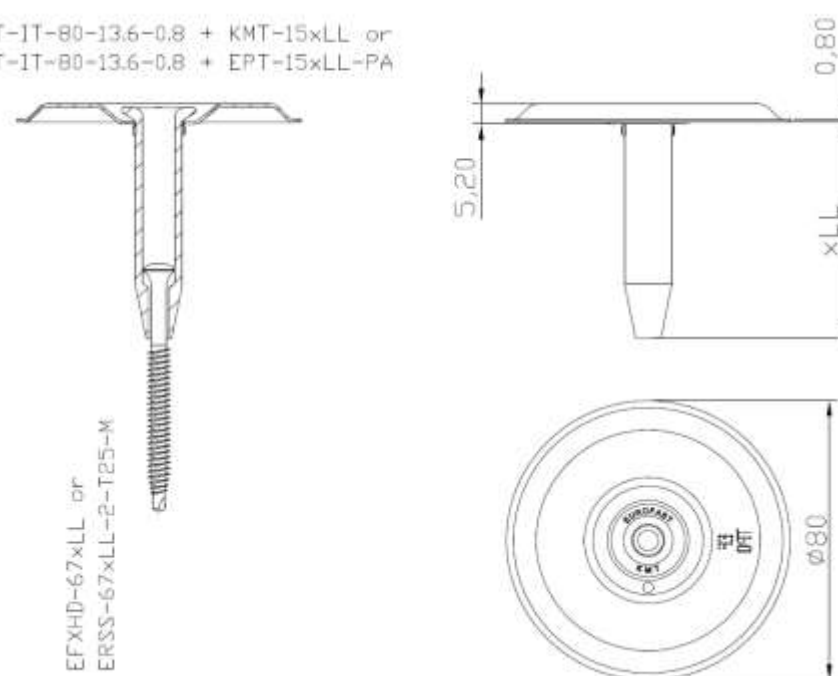


Eurofast Flat Roof Fasteners

EFXHD-67xLL (ERSS-67xLL-2-T25-M)

Annex E.15

of European
Technical Assessment
ETA-23/0651

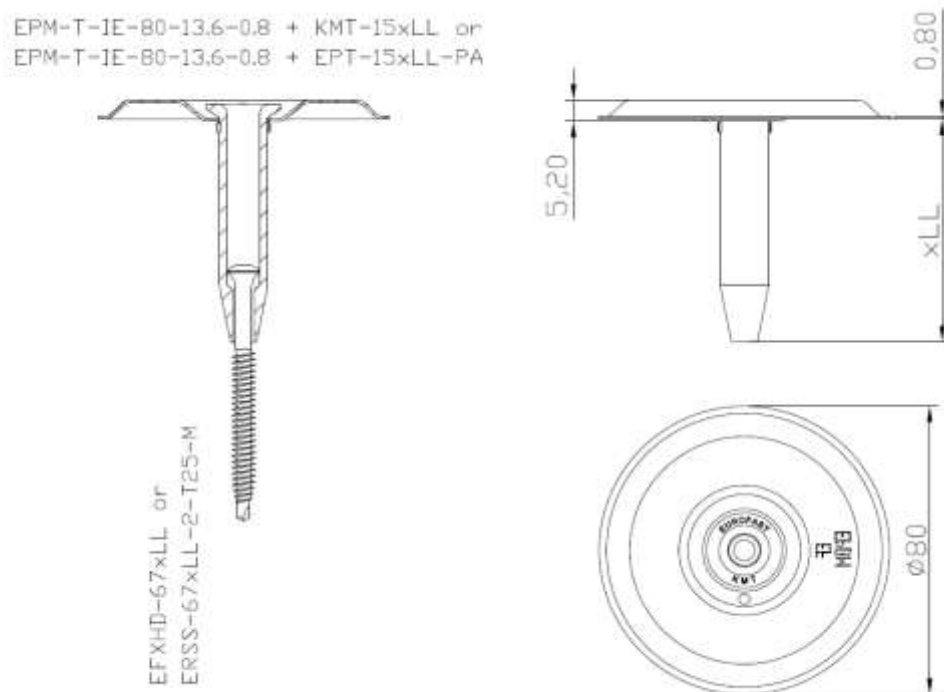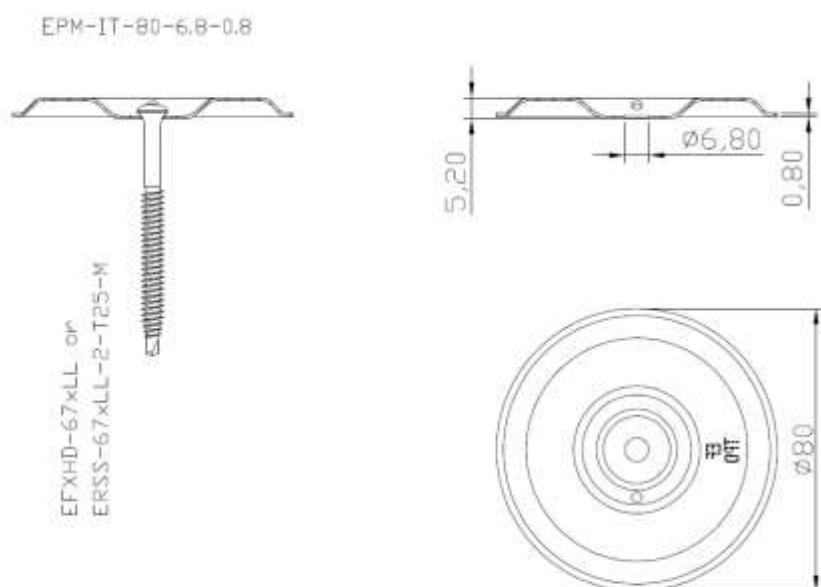


Eurofast Flat Roof Fasteners


EFXHD-67xLL (ERSS-67xLL-2-T25-M)

Annex E.16

of European
Technical Assessment
ETA-23/0651

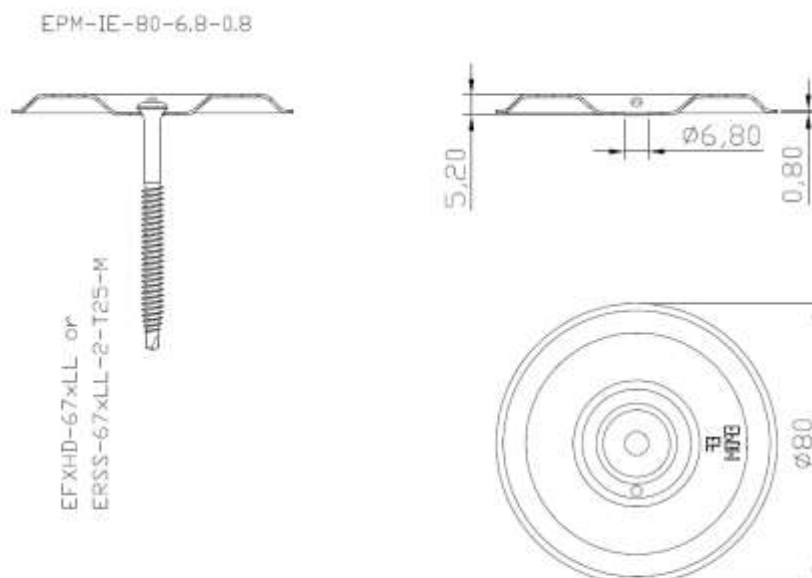

DVP-DL-70N + TLK-45xLL or
EPM-EDL-70N-20-0,5 + EPT-45xLL-PP

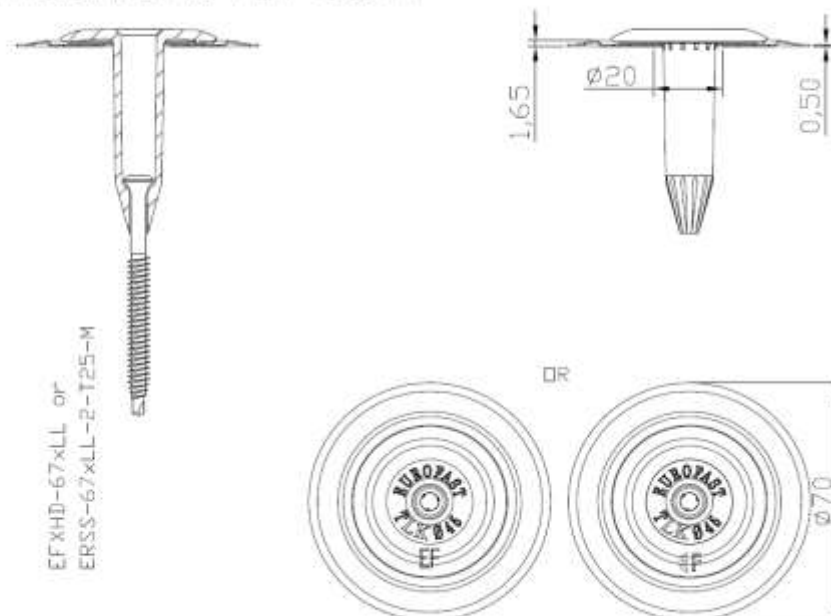


Eurofast Flat Roof Fasteners

EFXHD-67xLL (ERSS-67xLL-2-T25-M)


Annex E.17

of European
Technical Assessment
ETA-23/0651

DVP-DL-70N + TRP-45xLL or
EPM-EDL-70N-20-0.5 + EPT-45xLL-PA

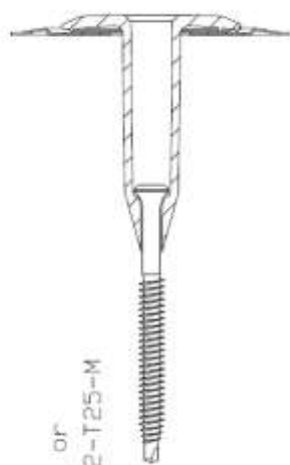

EFXHD-67xLL or
ERSS-67xLL-2-T25-M

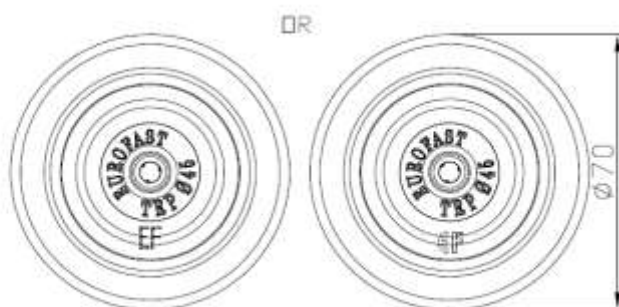


Eurofast Flat Roof Fasteners

EFXHD-67xLL (ERSS-67xLL-2-T25-M)

Annex E.18

of European
Technical Assessment
ETA-23/0651


EBS-xxxxx-25-7.1-1.25 or
BC-EBS-xxxxx-25-7.1-1.25

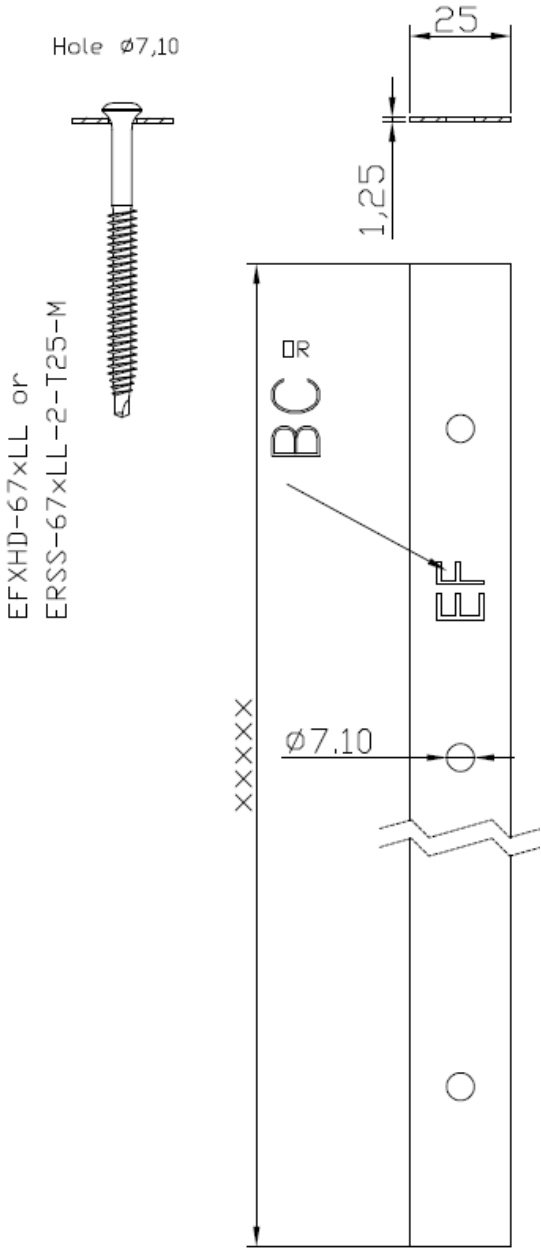

Eurofast Flat Roof Fasteners

EFXHD-67xLL (ERSS-67xLL-2-T25-M)

Annex E.19
of European
Technical Assessment
ETA-23/0651

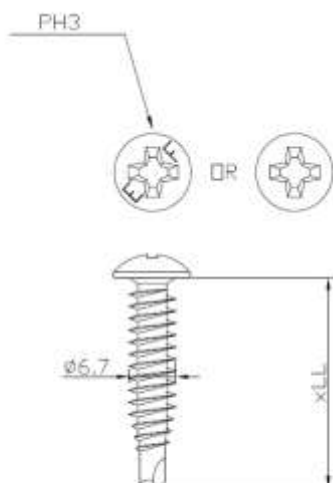

DFHD-67xLL or
ERSS-67xLL-2-PH3-15C

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)										
	Steel S320GD*									
t [mm]	0,50	0,60	0,63	0,70	0,75	0,80	0,88	1,00	1,25	1,50
DFHD-67xLL (ERSS-67xLL-2-PH3-15C)	1,10	1,52	1,52	1,98	2,09	2,59	2,59	2,94	3,48	3,48

* when using steel S280GD, values must be reduced by 8%

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)								
	OSB/3				Chipboard	Plywood		Timber C24
t [mm]	16	18	21	25	19	18	21	24
DFHD-67xLL (ERSS-67xLL-2-PH3-15C)	0,67	0,95	1,12	1,42	0,94	0,94	1,25	1,61

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)				
	EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)	DVP-EF-7010N (EPM-70N-6.5-1.0)	DVP-DF-8240H (EPM-8240H-7.0-1.0)	DVP-EF-51N (EPM-51N-6.7-0.84)
	EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)	DVP-EF-8040N (EPM-8040N-6.5-1.0)	DVP-DF-8240XH (EPM-8240XH-7.0-1.0)	EPM-51N-5.6-0.84
	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)	-	-	EPM-IP-80-6.8-0.8
	-	-	-	EPM-IT-80-6.8-0.8
	-	-	-	EPM-IE-80-6.8-0.8
	-	-	-	DVP-EF-7007H (EPM-70H-6.0-0.7)
DFHD-67xLL (ERSS-67xLL-2-PH3-15C)	5,05	2,89	5,17	2,91

Eurofast Flat Roof Fasteners

DFHD-67xLL (ERSS-67xLL-2-PH3-15C)

Annex F.1

of European
Technical Assessment
ETA-23/0651

Screw:

DFHD-67xLL (ERSS-67xLL-2-PH3-15C)

Metal pressure plate:

DVP-EF-7010N	(EPM-70N-6.5-1.0)
DVP-EF-7007H	(EPM-70H-6.0-0.7)
DVP-EF-8040N	(EPM-8040N-6.5-1.0)
DVP-DF-8240H	(EPM-8240H-7.0-1.0)
DVP-DF-8240XH	(EPM-8240XH-7.0-1.0)
DVP-EF-51N	(EPM-51N-6.7-0.84)
EPM-51N-5.6-0.84	
EPM-IP-80-6.8-0.8	
EPM-IT-80-6.8-0.8	
EPM-IE-80-6.8-0.8	

Termination bar:

EDF-BAR F	(ETM-2250-30-4.8-8.5-1.0)
EDF-BAR FB	(ETM-B-2250-30-4.8-8.5-1.0)
EDF-BAR F-TUBE	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)

Substrate:

Steel S280		EN 10346
Steel S320		EN 10346
OSB/3	$\rho_{min} = 550 \text{ kg/m}^3$	EN 12369-1
Chipboard	$\rho_{min} = 600 \text{ kg/m}^3$	EN 12369-1
Plywood	$\rho_{min} = 400 \text{ kg/m}^3$	EN 12369-2
Timber, class $\geq$ C24	$\rho_{min} = 350 \text{ kg/m}^3$	EN 338

Installation data:

Max. drilling capacity in steel substrate:	2x1,50 mm
Head type:	Truss Head
Recess:	PH3
Fixing in steel substrate:	Min. 20 mm of the screw fixed through the steel sheet
Fixing in wooden and wood-based substrate:	Full thread through the substrate or minimum embedment depth
Installation force of installation tool in:	
- steel substrate	25 kg
- wooden and wood-based substrate	35 kg
Installation tool speed:	1600 - 1800 rpm


Eurofast Flat Roof Fasteners

DFHD-67xLL (ERSS-67xLL-2-PH3-15C)


Annex F.2

of European
Technical Assessment
ETA-23/0651

EDF-BAR F or
ETM-2250-30-4.8-8.5-1.0

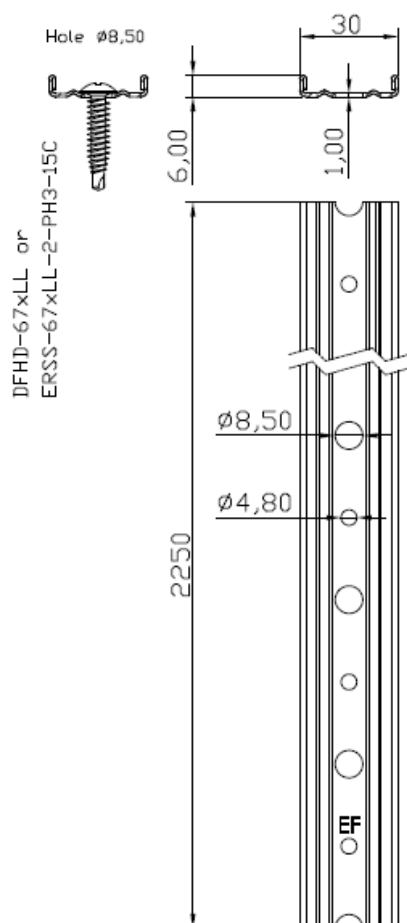

EDF-BAR FB or
ETM-B-2250-30-4.8-8.5-1.0

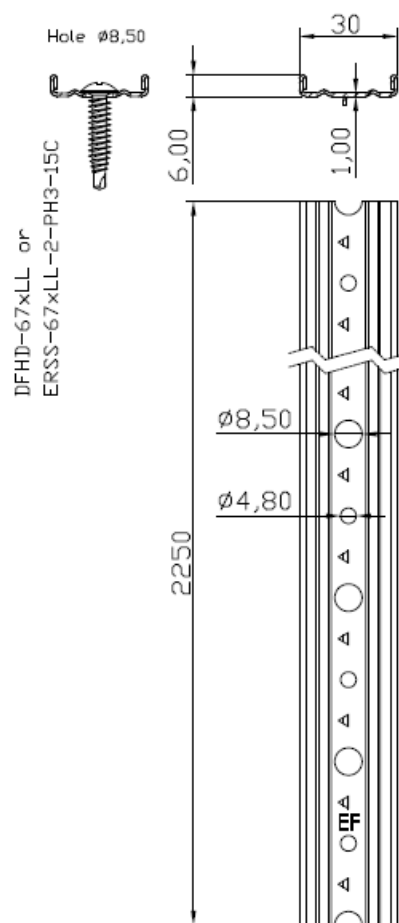


Eurofast Flat Roof Fasteners

DFHD-67xLL (ERSS-67xLL-2-PH3-15C)

Annex F.3

of European
Technical Assessment
ETA-23/0651

EDF-BAR-F-TUBE or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0

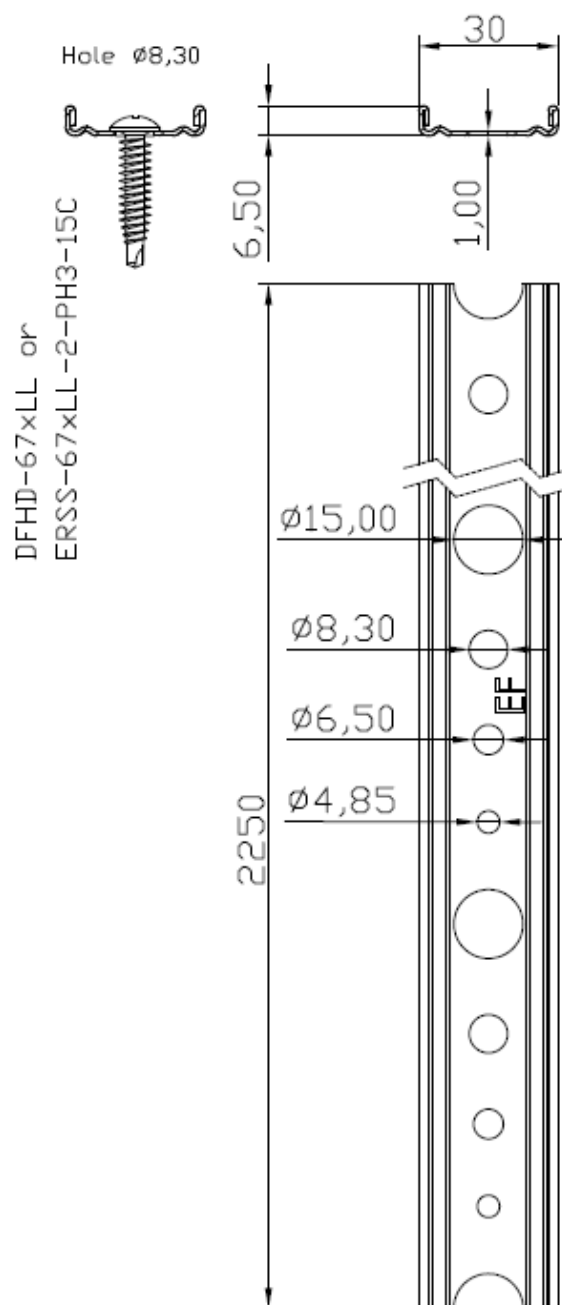


Eurofast Flat Roof Fasteners


DFHD-67xLL (ERSS-67xLL-2-PH3-15C)

Annex F.4
of European
Technical Assessment
ETA-23/0651

DVP-EF-7010N or EPM-70N-6,5-1,0

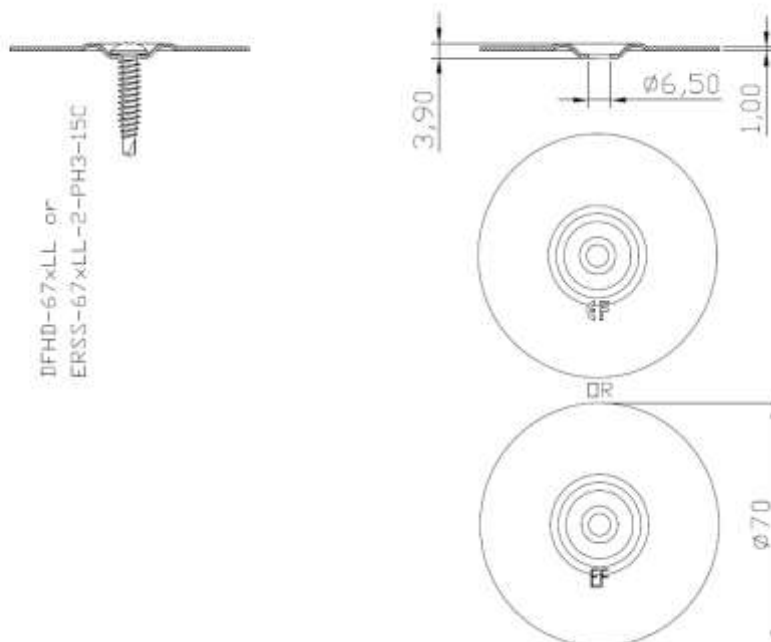

DVP-EF-8040N or EPM-8040N-6,5-1,0

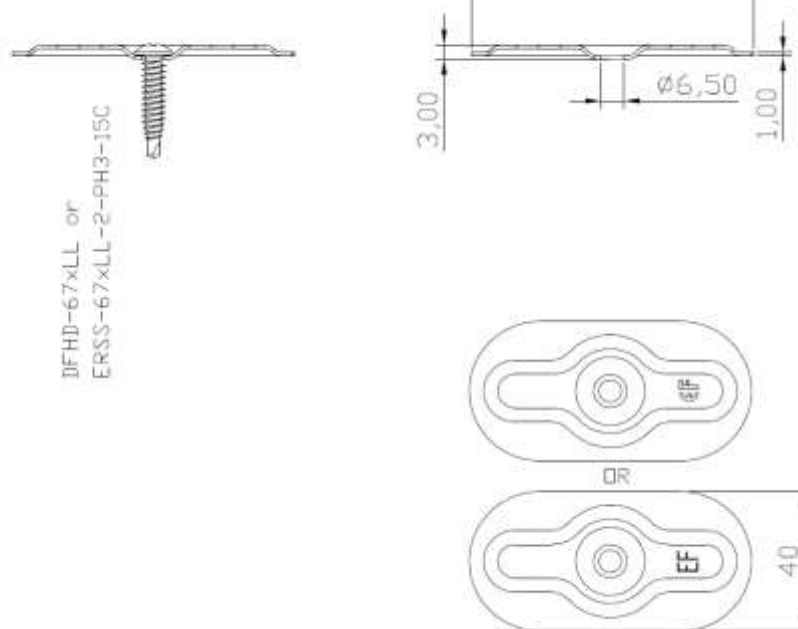


Eurofast Flat Roof Fasteners

DFHD-67xLL (ERSS-67xLL-2-PH3-15C)

Annex F.5
of European
Technical Assessment
ETA-23/0651




DVP-DF-8240H or EPM-8240H-7,0-1,0

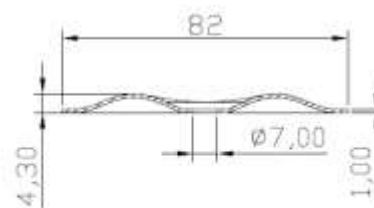DFHD-67xLL or
ERSS-67xLL-2-PH3-15C

DR



DVP-DF-8240XH or EPM-8240XH-7,0-1,0

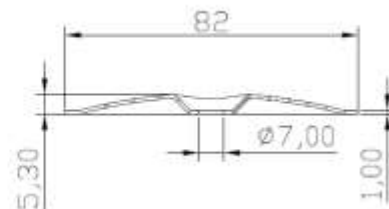DFHD-67xLL or
ERSS-67xLL-2-PH3-15C

DR




Eurofast Flat Roof Fasteners



DFHD-67xLL (ERSS-67xLL-2-PH3-15C)

Annex F.6
of European
Technical Assessment
ETA-23/0651

DVP-EF-51N or EPM-51N-6,7-0,84

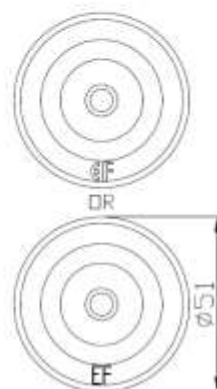
DFHD-67xLL or
ERSS-67xLL-2-PH3-15C


EPM-51N-5,6-0,84


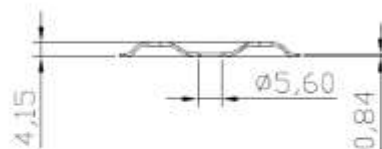

DFHD-67xLL or
ERSS-67xLL-2-PH3-15C


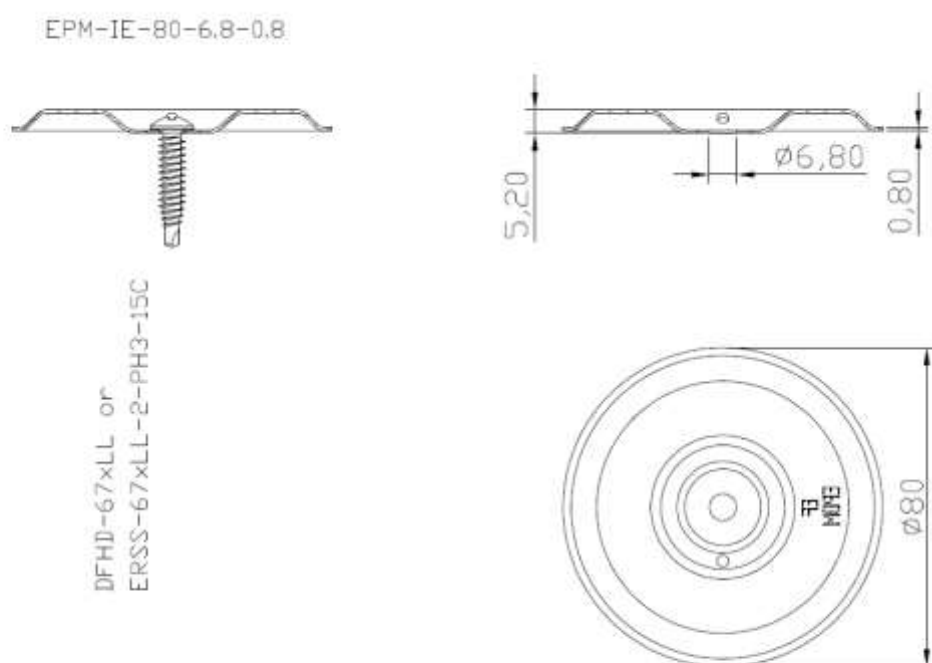
Eurofast Flat Roof Fasteners

DFHD-67xLL (ERSS-67xLL-2-PH3-15C)

Annex F.7

of European
Technical Assessment
ETA-23/0651

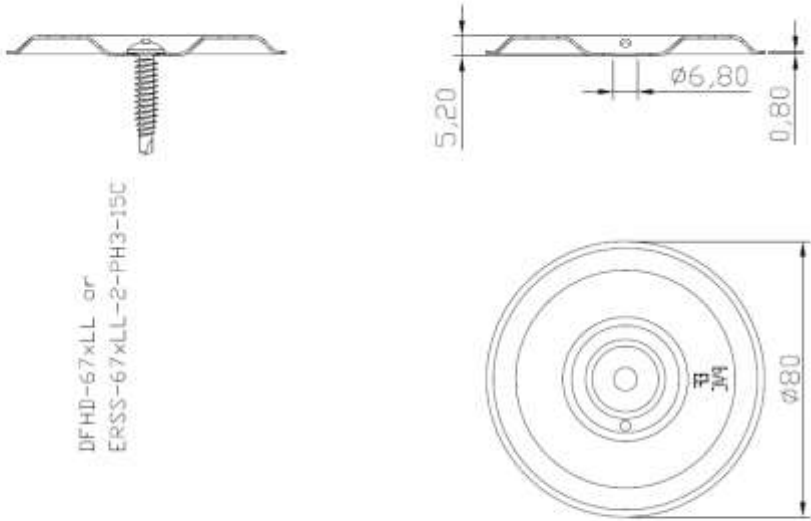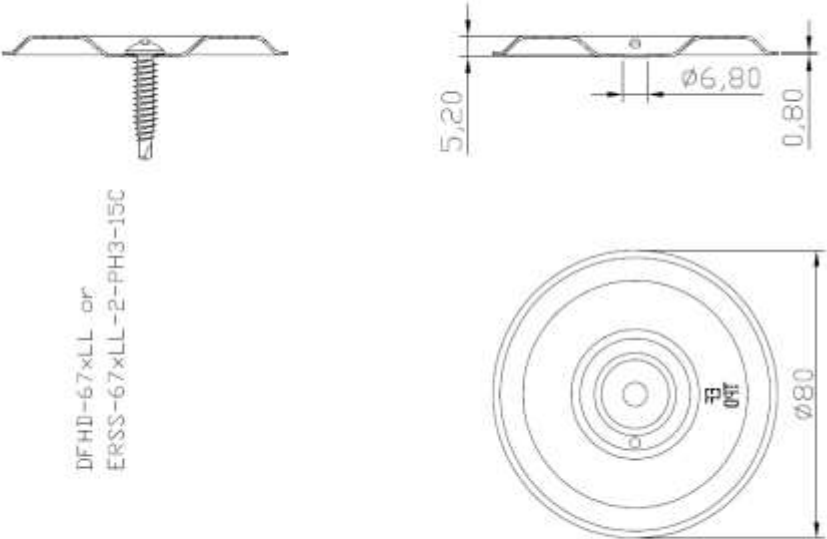EPM-IP-80-6.8-0.8  DFHD-67xLL or ERSS-67xLL-2-PH3-15C	
EPM-IT-80-6.8-0.8  DFHD-67xLL or ERSS-67xLL-2-PH3-15C	
Eurofast Flat Roof Fasteners	Annex F.8 of European Technical Assessment ETA-23/0651
DFHD-67xLL (ERSS-67xLL-2-PH3-15C)	




Eurofast Flat Roof Fasteners

DFHD-67xLL (ERSS-67xLL-2-PH3-15C)

Annex F.9

of European
Technical Assessment
ETA-23/0651

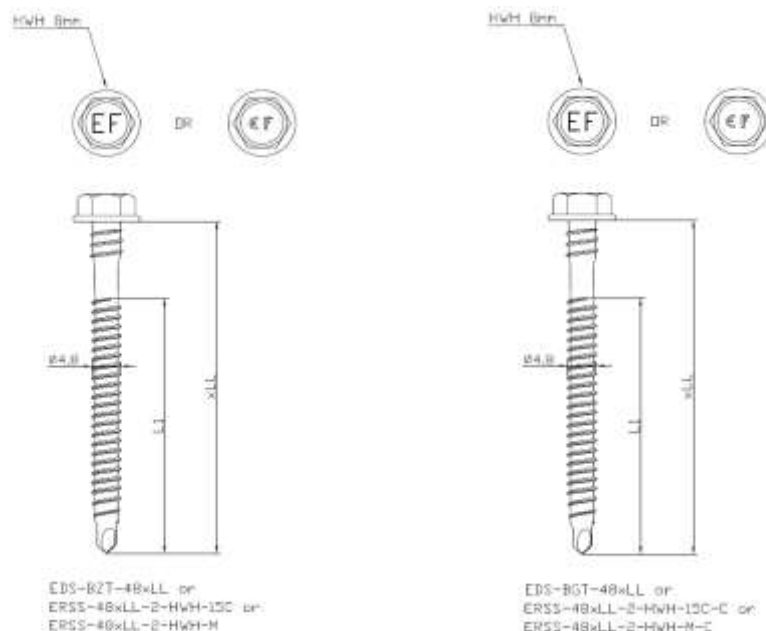

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)						
t [mm]	Steel S320GD*					
	0,70	0,75	0,80	0,88	1,00	1,25
EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)	1,24	1,39	1,60	1,60	1,72	2,23
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)	1,24	1,39	1,60	1,60	1,72	2,23

* when using steel S280GD, values must be reduced by 8%

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)							
t [mm]	OSB/3			Chipboard	Plywood		Timber C24
	18	21	25	19	18	21	24
EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)	1,12	1,25	1,33	0,95	1,03	1,24	1,70
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)	1,12	1,25	1,33	0,95	1,03	1,24	1,70

Eurofast Flat Roof Fasteners

EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)

Annex G.1
of European
Technical Assessment
ETA-23/0651

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)	DVP-EF-7010D (EPM-70D-6.5-1.0)	DVP-EF-5010D (EPM-50D-6.3-1.0)
	EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)	DVP-EF-8040D (EPM-8040D-6.5-1.0)	-
	DVP-EF-5010DFR (EPM-50D-4.85-1.0)	-	-
	DVP-EF-7070D (EPM-7070D-4.85-1.0)	-	-
	DVP-EF-7010DFR (EPM-70D-4.85-1.0)	-	-
	DVP-EF-8240D (EPM-8240D-4.85-1.0)	-	-
	DVP-EF-8240XH (EPM-8240XH-4.85-1.0)	-	-
	DVP-EFB-8240D (EPM-B-8240D-4.85-1.0)	-	-
	DVP-EFZK-8240D (EPM-ZK-8240D-4.85-1.0)	-	-
	DVP-EFF-8040D (EPM-8040D-4.85-1.0)	-	-
	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)	-	-
EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)	8,08	5,05	6,86
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)	8,08	5,05	6,86

* "Pull-over" according to CEN/TS 17659:2021

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	DVP-DF-7070D (EPM-7070D-7.0-1.0)	DVP-EF-7005D (EPM-70D-5.0-0.5)	DVP-EF-7007D (EPM-70D-6.0-0.7)
	DVP-DF-8240D (EPM-8240D-7.0-1.0)	-	-
	DVP-DF-8240XH (EPM-8240XH-7.0-1.0)	-	-
	DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)	-	-
EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)	5,25	5,31	5,36
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)	5,25	5,31	5,36

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)

Annex G.2

of European
Technical Assessment
ETA-23/0651

Screw:

EDS-BZT-48xLL	(ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)
EDS-BGT-48xLL	(ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)

Metal pressure plate:

DVP-EF-5010DFR	(EPM-50D-4.85-1.0)
DVP-EF-5010D	(EPM-50D-6.3-1.0)
DVP-EF-7070D	(EPM-7070D-4.85-1.0)
DVP-DF-7070D	(EPM-7070D-7.0-1.0)
DVP-EF-7010DFR	(EPM-70D-4.85-1.0)
DVP-EF-7005D	(EPM-70D-5.0-0.5)
DVP-EF-7007D	(EPM-70D-6.0-0.7)
DVP-EF-7010D	(EPM-70D-6.5-1.0)
DVP-EF-8040D	(EPM-8040D-6.5-1.0)
DVP-EF-8240D	(EPM-8240D-4.85-1.0)
DVP-DF-8240D	(EPM-8240D-7.0-1.0)
DVP-EF-8240XH	(EPM-8240XH-4.85-1.0)
DVP-DF-8240XH	(EPM-8240XH-7.0-1.0)
DVP-EFB-8240D	(EPM-B-8240D-4.85-1.0)
DVP-DFB-8240D	(EPM-B-8240D-7.0-1.0)
DVP-EFZK-8240D	(EPM-ZK-8240D-4.85-1.0)
DVP-EFF-8040D	(EPM-8040D-4.85-1.0)

Termination bar:

EDF-BAR F	(ETM-2250-30-4.8-8.5-1.0)
EDF-BAR FB	(ETM-B-2250-30-4.8-8.5-1.0)
EDF-BAR F-TUBE	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)

Substrate:

Steel S280		EN 10346
Steel S320		EN 10346
OSB/3	$\rho_{\min} = 550 \text{ kg/m}^3$	EN 12369-1
Chipboard	$\rho_{\min} = 600 \text{ kg/m}^3$	EN 12369-1
Plywood	$\rho_{\min} = 400 \text{ kg/m}^3$	EN 12369-2
Timber, class $\geq$ C24	$\rho_{\min} = 350 \text{ kg/m}^3$	EN 338

Installation data:

Max. drilling capacity in steel substrate:

2x1,25 mm

Head type:

Hex Washer Head 8 mm

Screws EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C / ERSS-48xLL-2-HWH-M-C):

Collated screws for use with **DEK-FIX** tool

Fixing in steel substrate:

Min. 20 mm of the screw fixed through the steel sheet

Fixing in wooden or wood-based substrate:

Full thread through the substrate or minimum embedment depth

Installation force of installation tool in:

- steel substrate

15 kg

- wooden or wood-based substrate:


30 kg

Installation tool speed:

2000 - 2500 rpm

Additional feature:

Safe thread


**Eurofast Flat Roof Fasteners**

EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)


Annex G.3

of European
Technical Assessment
ETA-23/0651

EDF-BAR F or
ETM-2250-30-4.8-8.5-1.0

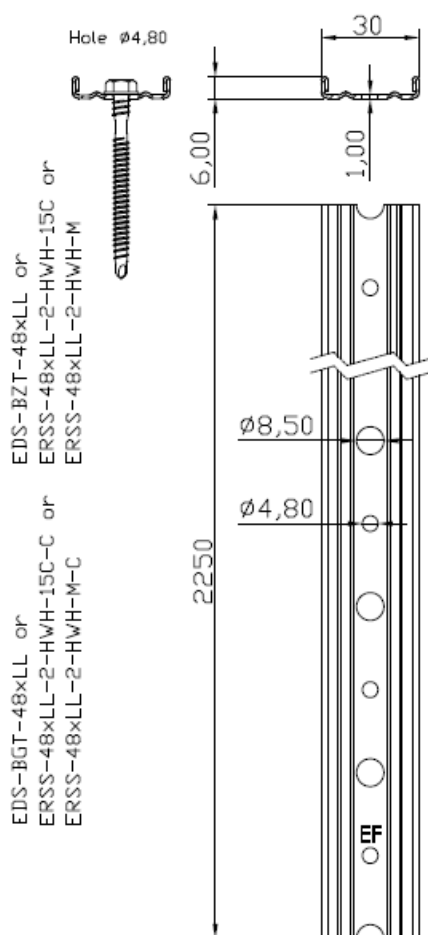

EDF-BAR FB or
ETM-B-2250-30-4.8-8.5-1.0

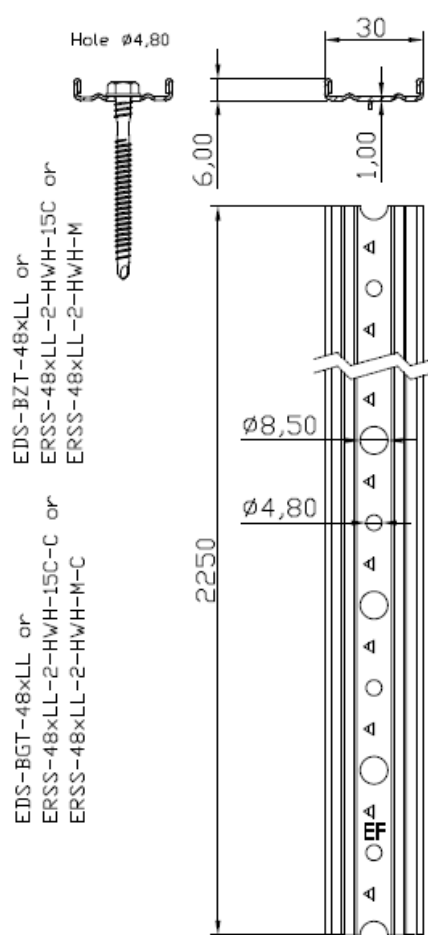


Eurofast Flat Roof Fasteners

EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)

Annex G.4

of European
Technical Assessment
ETA-23/0651

EDF-BAR-F-TUBE or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0

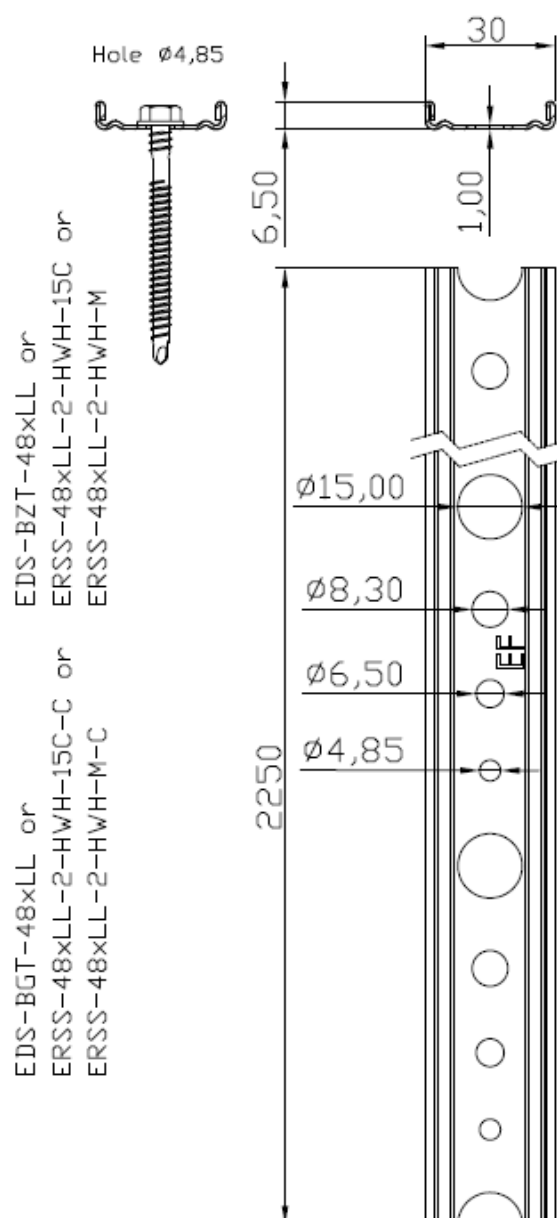

Eurofast Flat Roof Fasteners

EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)




Annex G.5

of European
Technical Assessment
ETA-23/0651

DVP-EF-5010DFR or EPM-50D-4.85-1.0

EDS-BZT-48xLL or
ERSS-48xLL-2-HWH-15C or
ERSS-48xLL-2-HWH-M




EDS-BGT-48xLL or
ERSS-48xLL-2-HWH-15C-C or
ERSS-48xLL-2-HWH-M-C

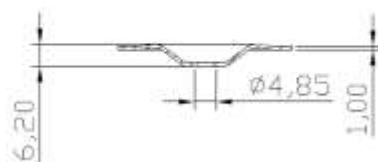

DVP-EF-5010D or EPM-50D-6.3-1.0

EDS-BZT-48xLL or
ERSS-48xLL-2-HWH-15C or
ERSS-48xLL-2-HWH-M

EDS-BGT-48xLL or
ERSS-48xLL-2-HWH-15C-C or
ERSS-48xLL-2-HWH-M-C

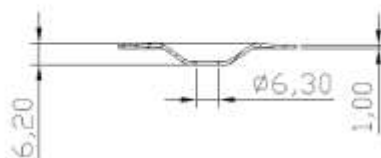



Eurofast Flat Roof Fasteners

EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)

Annex G.6

of European
Technical Assessment
ETA-23/0651

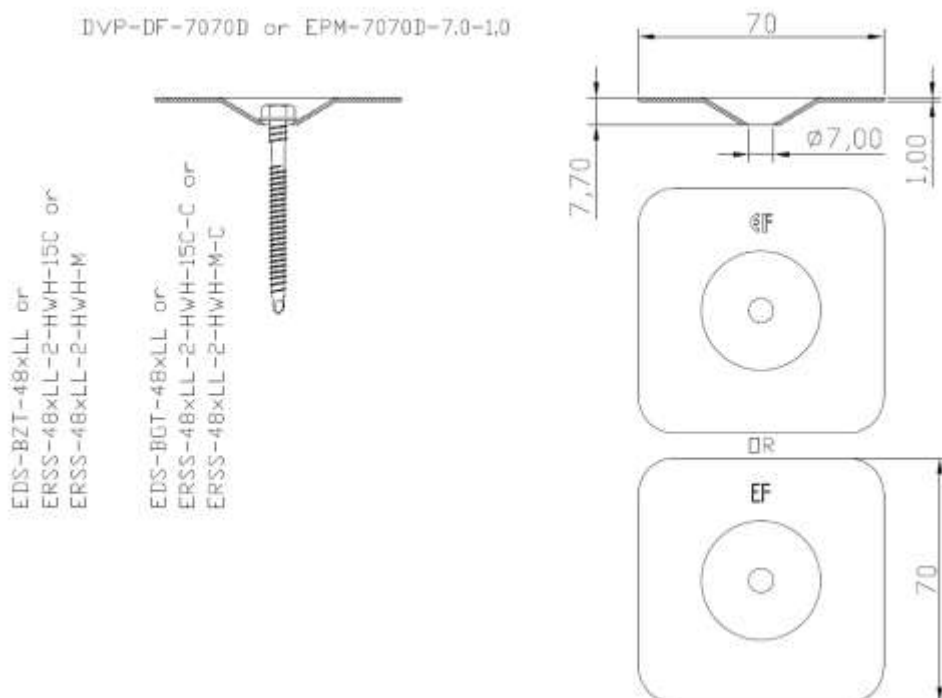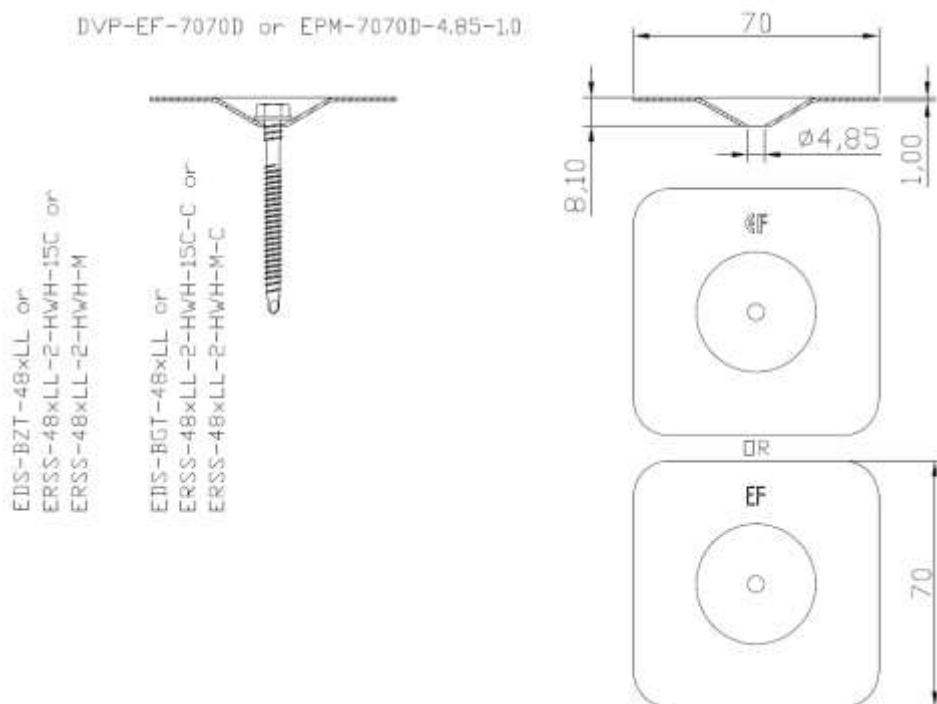

Eurofast Flat Roof Fasteners



EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)

Annex G.7
of European
Technical Assessment
ETA-23/0651

DVP-EF-7010DFR or EPM-70D-4.85-1,0

EDS-BZT-48xLL or
ERSS-48xLL-2-HWH-15C or
ERSS-48xLL-2-HWH-M



EDS-BGT-48xLL or
ERSS-48xLL-2-HWH-15C-C or
ERSS-48xLL-2-HWH-M-C

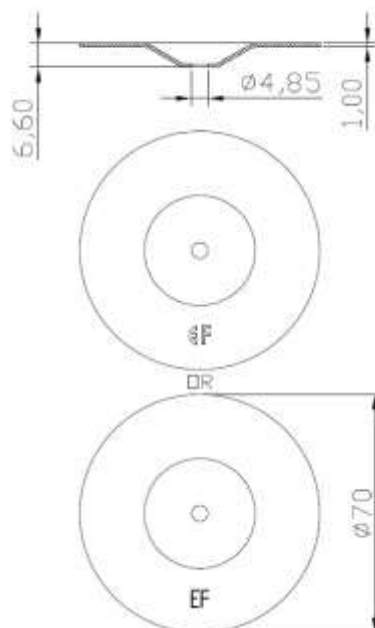

DVP-EF-7005D or EPM-70D-5.0-0,5

EDS-BZT-48xLL or
ERSS-48xLL-2-HWH-15C or
ERSS-48xLL-2-HWH-M

EDS-BGT-48xLL or
ERSS-48xLL-2-HWH-15C-C or
ERSS-48xLL-2-HWH-M-C

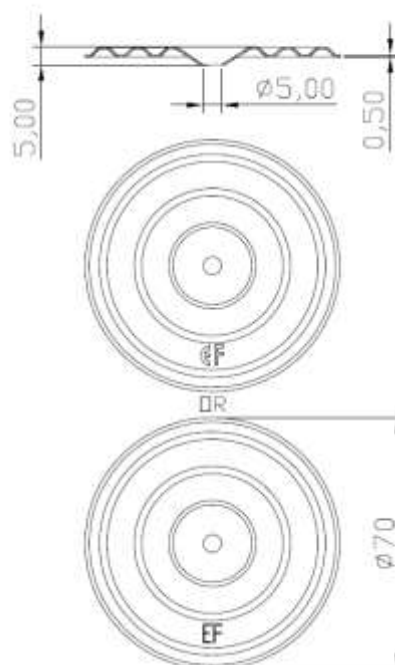

Eurofast Flat Roof Fasteners


EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)

Annex G.8


of European
Technical Assessment
ETA-23/0651

DVP-EF-7007D or EPM-70D-6,0-0.7

EDS-BZT-48xLL or
ERSS-48xLL-2-HWH-15C or
ERSS-48xLL-2-HWH-M




EDS-BGT-48xLL or
ERSS-48xLL-2-HWH-15C-C or
ERSS-48xLL-2-HWH-M-C

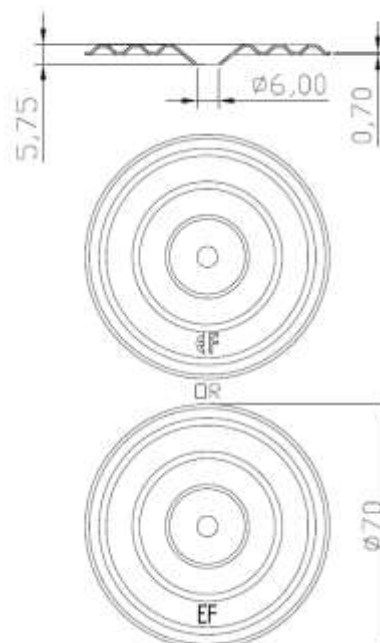


DVP-EF-7010D or EPM-70D-6,5-1.0

EDS-BZT-48xLL or
ERSS-48xLL-2-HWH-15C or
ERSS-48xLL-2-HWH-M



EDS-BGT-48xLL or
ERSS-48xLL-2-HWH-15C-C or
ERSS-48xLL-2-HWH-M-C


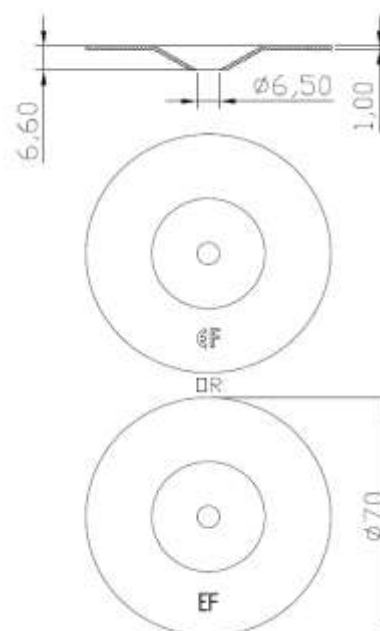


Eurofast Flat Roof Fasteners

EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)

Annex G.9

of European
Technical Assessment
ETA-23/0651

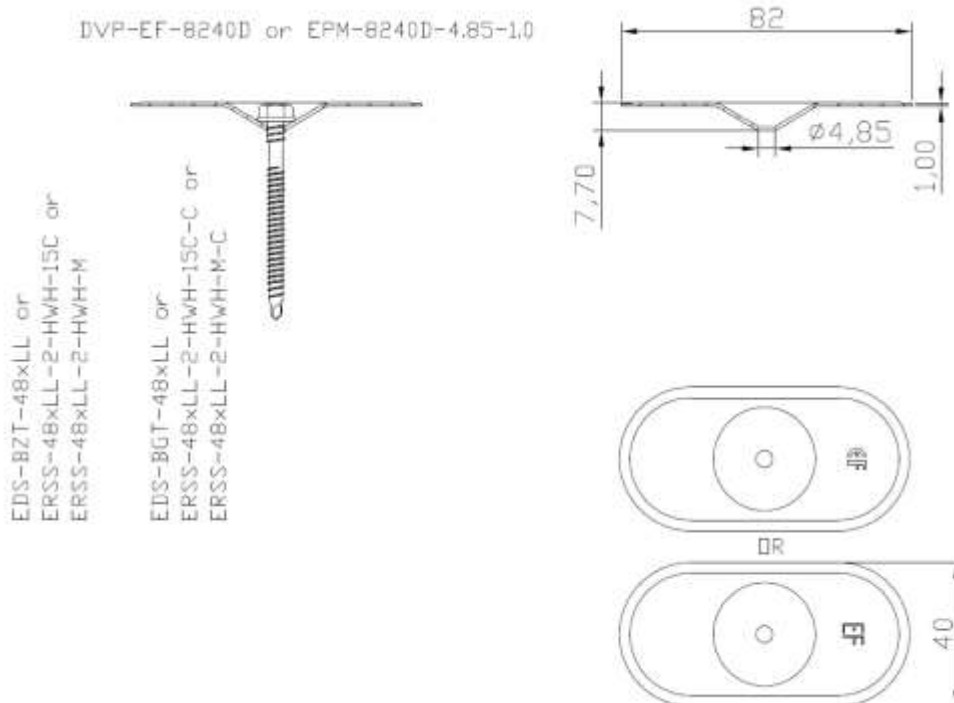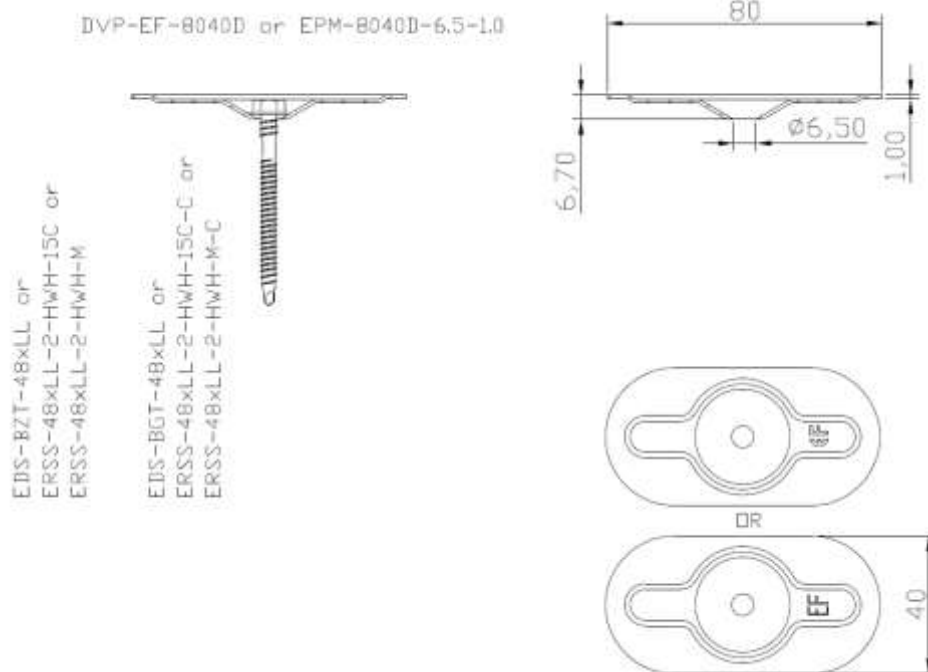

Eurofast Flat Roof Fasteners

EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)



Annex G.10

of European
Technical Assessment
ETA-23/0651

DVP-DF-8240D or EPM-8240D-7,00-1,0

EDS-BZT-48xLL or
ERSS-48xLL-2-HWH-15C or
ERSS-48xLL-2-HWH-M

EDS-BGT-48xLL or
ERSS-48xLL-2-HWH-15C-C or
ERSS-48xLL-2-HWH-M-C

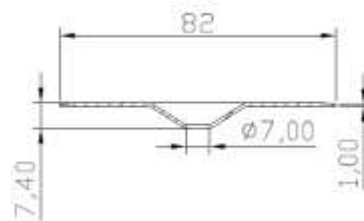




OR



DVP-DF-8240XH or EPM-8240XH-4,85-1,0

EDS-BZT-48xLL or
ERSS-48xLL-2-HWH-15C or
ERSS-48xLL-2-HWH-M

EDS-BGT-48xLL or
ERSS-48xLL-2-HWH-15C-C or
ERSS-48xLL-2-HWH-M-C

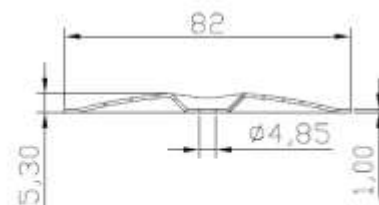

OR



Eurofast Flat Roof Fasteners

EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)



Annex G.11

of European
Technical Assessment
ETA-23/0651

DVP-DF-8240XH or EPM-8240XH-7.0-1.0

EDS-BZT-48xLL or
ERSS-48xLL-2-HWH-15C or
ERSS-48xLL-2-HWH-M




EDS-BGT-48xLL or
ERSS-48xLL-2-HWH-15C-C or
ERSS-48xLL-2-HWH-M-C

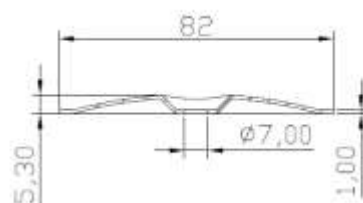

DVP-EFB-8240D or EPM-B-8240D-4.85-1.0

EDS-BZT-48xLL or
ERSS-48xLL-2-HWH-15C or
ERSS-48xLL-2-HWH-M

EDS-BGT-48xLL or
ERSS-48xLL-2-HWH-15C-C or
ERSS-48xLL-2-HWH-M-C

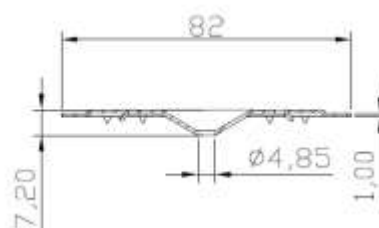



Eurofast Flat Roof Fasteners

EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)

Annex G.12


of European
Technical Assessment
ETA-23/0651

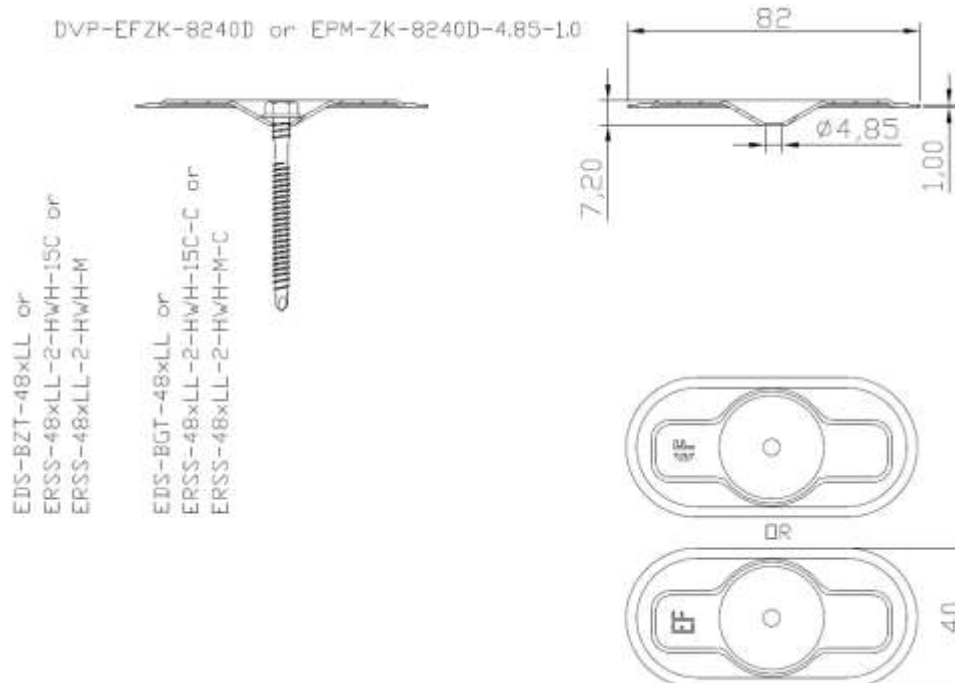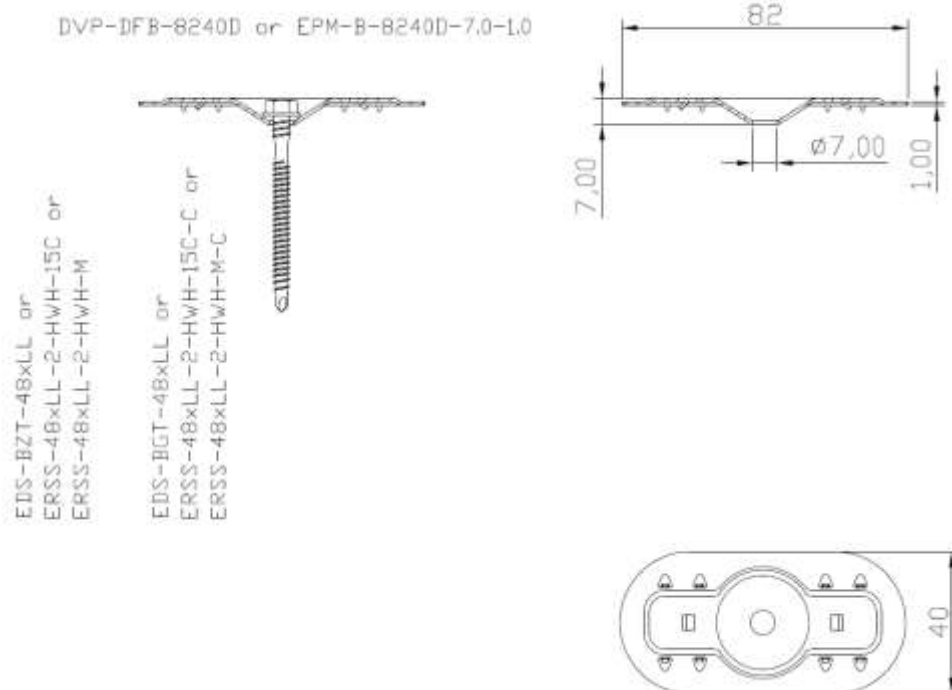

Eurofast Flat Roof Fasteners

EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)

Annex G.13
of European
Technical Assessment
ETA-23/0651

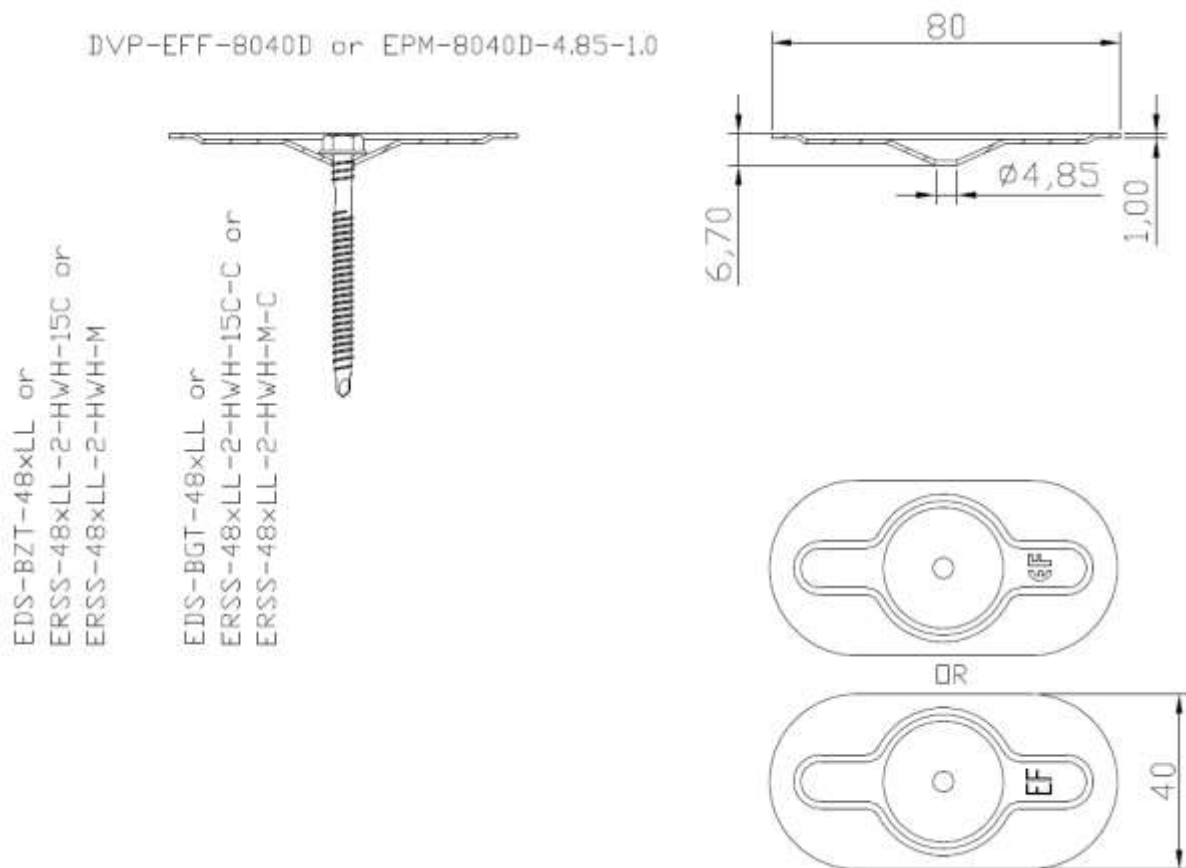


Eurofast Flat Roof Fasteners

EDS-BZT-48xLL (ERSS-48xLL-2-HWH-15C or ERSS-48xLL-2-HWH-M)
EDS-BGT-48xLL (ERSS-48xLL-2-HWH-15C-C or ERSS-48xLL-2-HWH-M-C)

Annex G.14

of European
Technical Assessment
ETA-23/0651

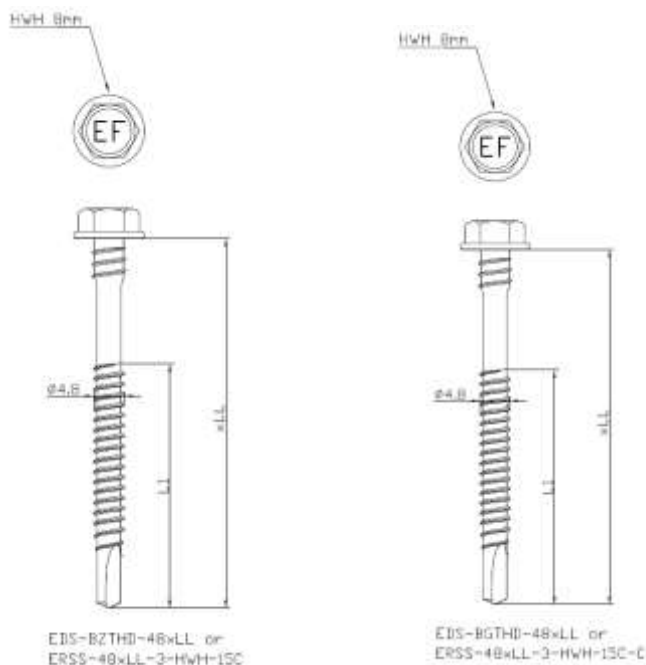

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)			
t [mm]	Steel S320GD*		
	1,00	1,25	1,50
EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)	1,30	1,86	2,34
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)	1,30	1,86	2,34

* when using steel S280GD, values must be reduced by 8%

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	DVP-DF-7070D (EPM-7070D-7.0-1.0)	DVP-EF-7005D (EPM-70D-5.0-0.5)	DVP-EF-7007D (EPM-70D-6.0-0.7)
	DVP-DF-8240D (EPM-8240D-7.0-1.0)	-	-
	DVP-DF-8240XH (EPM-8240XH-7.0-1.0)	-	-
	DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)	-	-
EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)	5,25	5,31	5,36
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)	5,25	5,31	5,36

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)

Annex H.1
of European
Technical Assessment
ETA-23/0651

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)	DVP-EF-7010D (EPM-70D-6.5-1.0)	DVP-EF-5010D (EPM-50D-6.3-1.0)
	EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)	DVP-EF-8040D (EPM-8040D-6.5-1.0)	-
	DVP-EF-5010DFR (EPM-50D-4.85-1.0)	-	-
	DVP-EF-7070D (EPM-7070D-4.85-1.0)	-	-
	DVP-EF-7010DFR (EPM-70D-4.85-1.0)	-	-
	DVP-EF-8240D (EPM-8240D-4.85-1.0)	-	-
	DVP-EF-8240XH (EPM-8240XH-4.85-1.0)	-	-
	DVP-EFB-8240D (EPM-B-8240D-4.85-1.0)	-	-
	DVP-EFZK-8240D (EPM-ZK-8240D-4.85-1.0)	-	-
	DVP-EFF-8040D (EPM-8040D-4.85-1.0)	-	-
	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)	-	-
EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)	8,08	5,05	6,86
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)	8,08	5,05	6,86

* "Pull-over" according to CEN/TS 17659:2021

Screw:

EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)

Metal pressure plate:

DVP-EF-5010DFR (EPM-50D-4.85-1.0)
DVP-EF-5010D (EPM-50D-6.3-1.0)
DVP-EF-7070D (EPM-7070D-4.85-1.0)
DVP-DF-7070D (EPM-7070D-7.0-1.0)
DVP-EF-7010DFR (EPM-70D-4.85-1.0)
DVP-EF-7005D (EPM-70D-5.0-0.5)
DVP-EF-7007D (EPM-70D-6.0-0.7)
DVP-EF-7010D (EPM-70D-6.5-1.0)
DVP-EF-8040D (EPM-8040D-6.5-1.0)
DVP-EF-8240D (EPM-8240D-4.85-1.0)
DVP-DF-8240D (EPM-8240D-7.0-1.0)
DVP-EF-8240XH (EPM-8240XH-4.85-1.0)
DVP-DF-8240XH (EPM-8240XH-7.0-1.0)
DVP-EFB-8240D (EPM-B-8240D-4.85-1.0)
DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)
DVP-EFZK-8240D (EPM-ZK-8240D-4.85-1.0)
DVP-EFF-8040D (EPM-8040D-4.85-1.0)

Termination bar:


EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)
EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)
EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)

Substrate:

Steel S280 EN 10346
Steel S320 EN 10346

Installation data:

Max. drilling capacity in steel substrate: 2x1,50 mm
Head type: Hex Washer Head 8 mm
Screws EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C): Collated screws for use with **DEK-FIX** tool
Fixing in steel substrate: Min. 20 mm of the screw fixed through the steel sheet
Installation force of installation tool: 15 kg
Installation tool speed: 2000 - 2500 rpm
Additional feature: Safe thread




Eurofast Flat Roof Fasteners

EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)


Annex H.2

of European
Technical Assessment
ETA-23/0651

EDF-BAR F or
ETM-2250-30-4.8-8.5-1.0

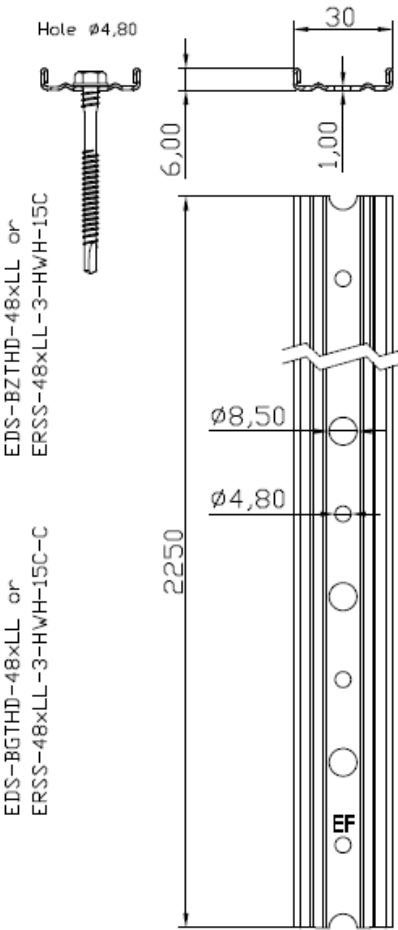

EDF-BAR FB or
ETM-B-2250-30-4.8-8.5-1.0

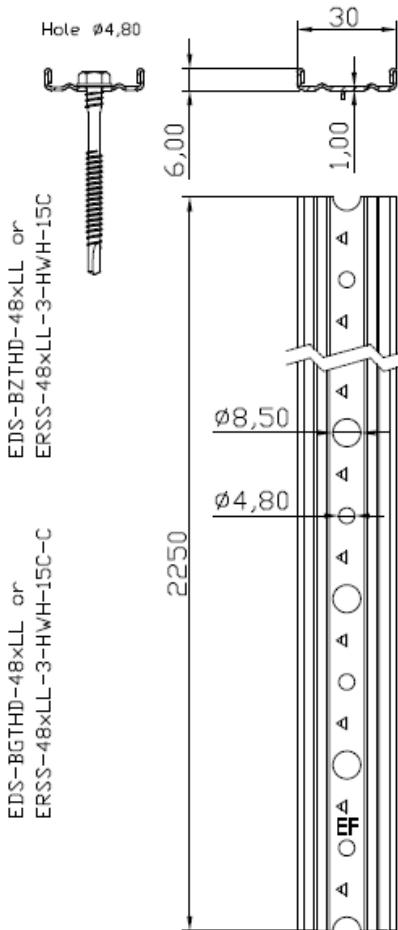


Eurofast Flat Roof Fasteners

EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)

Annex H.3

of European
Technical Assessment
ETA-23/0651

EDF-BAR-F-TUBE or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0

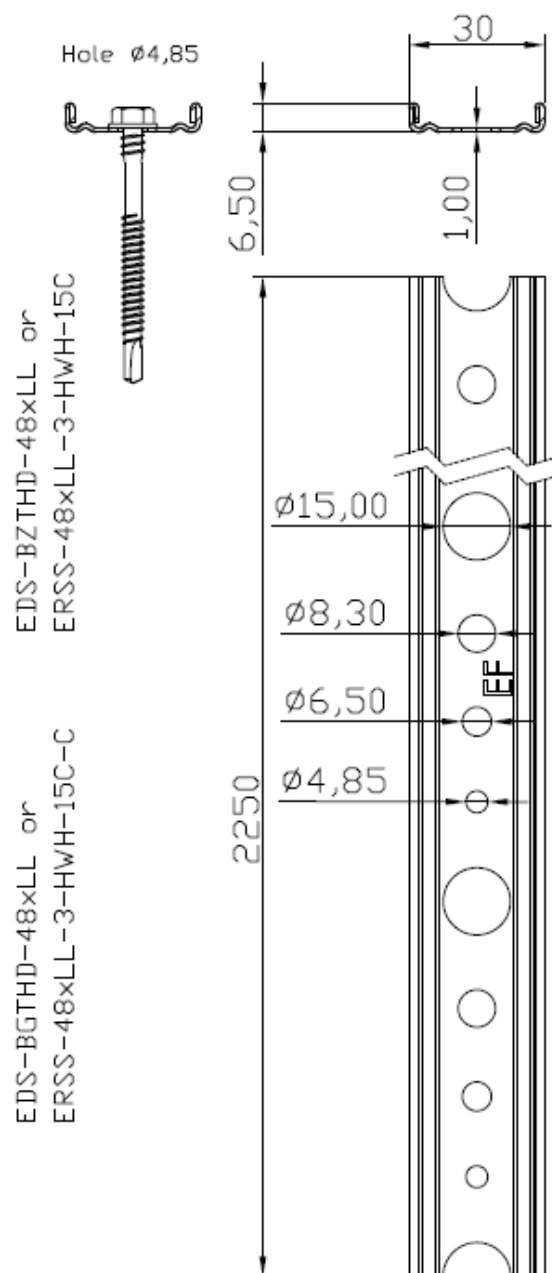




Eurofast Flat Roof Fasteners

EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)




Annex H.4

of European
Technical Assessment
ETA-23/0651

DVP-EF-5010DFR or EPM-50D-4,85-1.0

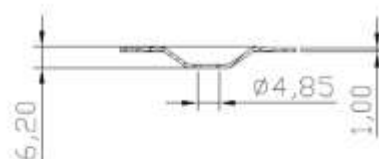EDS-BZTHD-48xLL or
ERSS-48xLL-3-HWH-15CEDS-BGTHD-48xLL or
ERSS-48xLL-3-HWH-15C-C

DVP-EF-5010D or EPM-50D-6,3-1.0

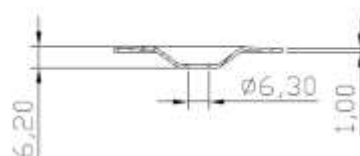

EDS-BZTHD-48xLL or
ERSS-48xLL-3-HWH-15CEDS-BGTHD-48xLL or
ERSS-48xLL-3-HWH-15C-C

Eurofast Flat Roof Fasteners

EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)Annex H.5
of European
Technical Assessment
ETA-23/0651



DVP-EF-7070D or EPM-7070D-4,85-1,0

EDS-BZTHD-48xLL or
ERSS-48xLL-3-HWH-15C

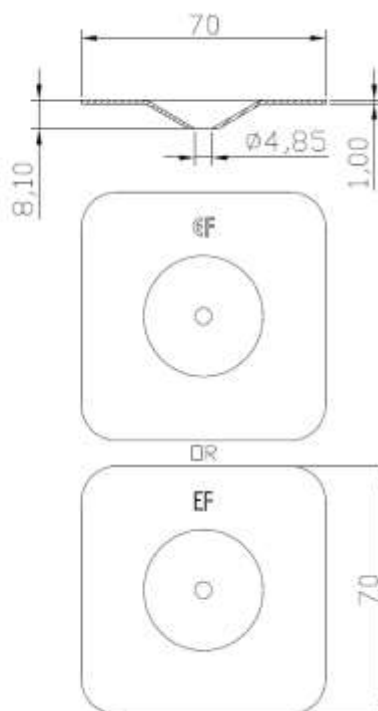EDS-BGTHD-48xLL or
ERSS-48xLL-3-HWH-15C-C


DVP-DF-7070D or EPM-7070D-7,0-1,0

EDS-BZTHD-48xLL or
ERSS-48xLL-3-HWH-15C

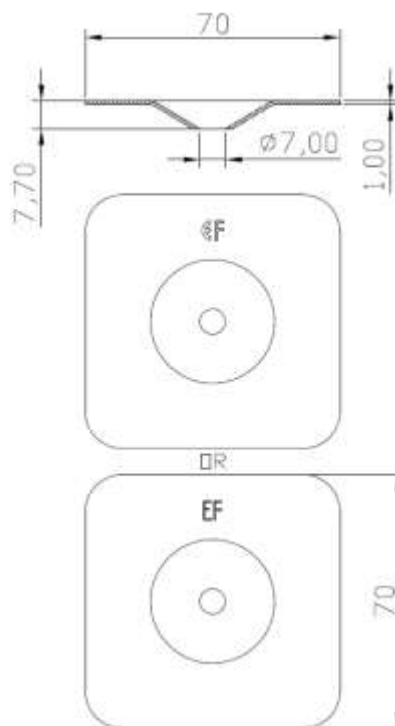EDS-BGTHD-48xLL or
ERSS-48xLL-3-HWH-15C-C


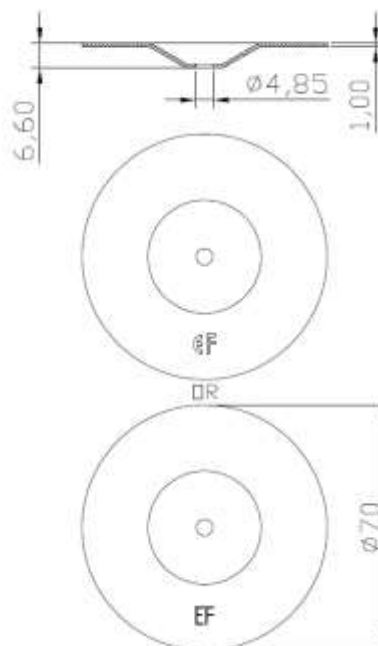

Eurofast Flat Roof Fasteners

EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)



Annex H.6

of European
Technical Assessment
ETA-23/0651

DVP-EF-7010DFR or EPM-70D-4,85-1,0

EDS-BZTHD-48xLL or
ERSS-48xLL-3-HWH-15CEDS-BGTHD-48xLL or
ERSS-48xLL-3-HWH-15C-C

DVP-EF-7005D or EPM-70D-5,0-0,5

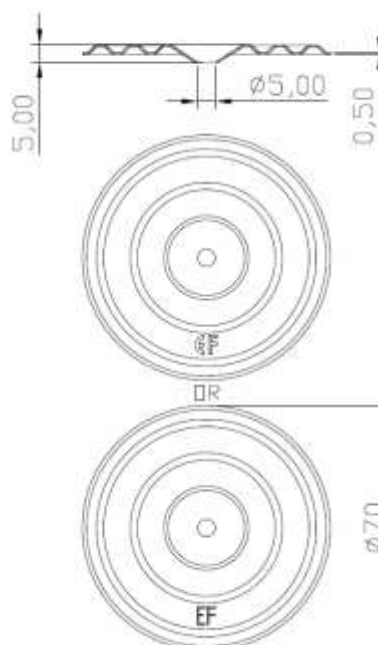EDS-BZTHD-48xLL or
ERSS-48xLL-3-HWH-15CEDS-BGTHD-48xLL or
ERSS-48xLL-3-HWH-15C-C



Eurofast Flat Roof Fasteners

EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)Annex H.7
of European
Technical Assessment
ETA-23/0651

DVP-EF-7007D or EPM-70D-6,0-0,7

EDS-BZTHD-48xLL or
ERSS-48xLL-3-HWH-15C



EDS-BGTHD-48xLL or
ERSS-48xLL-3-HWH-15C-C

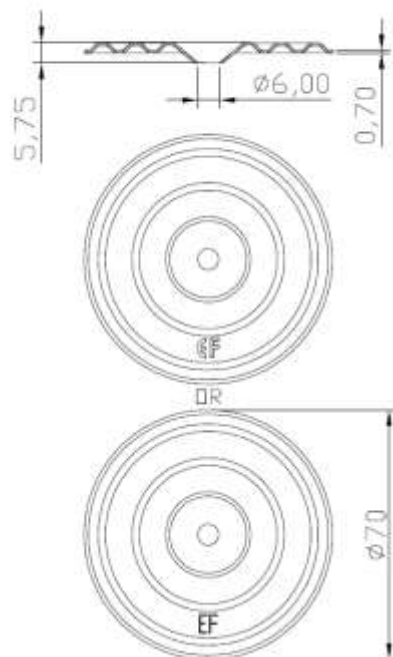

DVP-EF-7010D or EPM-70D-6,5-1,0

EDS-BZTHD-48xLL or
ERSS-48xLL-3-HWH-15C

EDS-BGTHD-48xLL or
ERSS-48xLL-3-HWH-15C-C

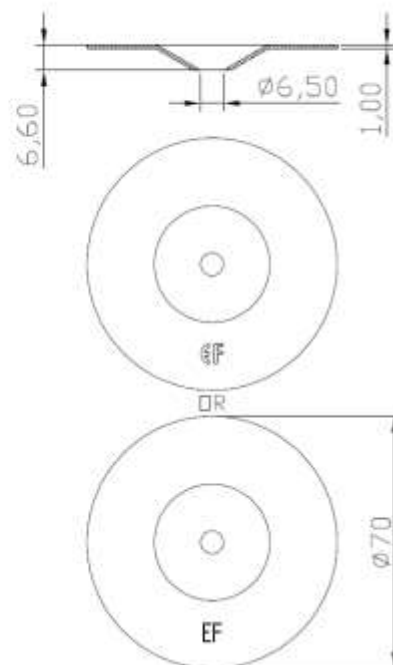

Eurofast Flat Roof Fasteners

EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)




Annex H.8

of European
Technical Assessment
ETA-23/0651


DVP-EF-8040D or EPM-8040D-6.5-1.0

EDS-BZTHD-48xLL or
ERSS-48xLL-3-HWH-15C

EDS-BGTHD-48xLL or
ERSS-48xLL-3-HWH-15C-C

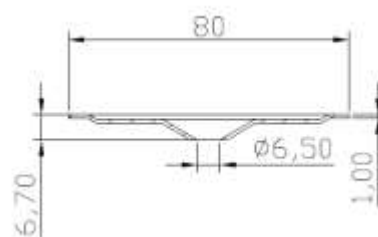




OR



DVP-EF-8240D or EPM-8240D-4.85-1.0

EDS-BZTHD-48xLL or
ERSS-48xLL-3-HWH-15C

EDS-BGTHD-48xLL or
ERSS-48xLL-3-HWH-15C-C

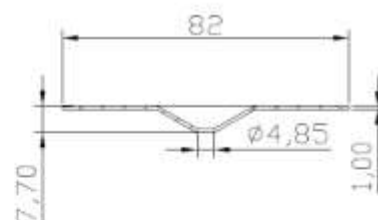

OR



Eurofast Flat Roof Fasteners




EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)

Annex H.9

of European
Technical Assessment
ETA-23/0651




DVP-DF-8240D or EPM-8240D-7.00-1.0

EDS-BZTHD-48xLL or
ERSS-48xLL-3-HWH-15C
EDS-BGTHD-48xLL or
ERSS-48xLL-3-HWH-15C-C

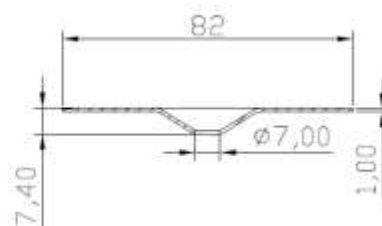

DVP-DF-8240XH or EPM-8240XH-4.85-1.0

EDS-BZTHD-48xLL or
ERSS-48xLL-3-HWH-15C
EDS-BGTHD-48xLL or
ERSS-48xLL-3-HWH-15C-C

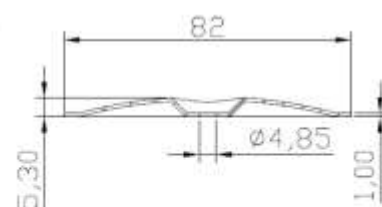

Eurofast Flat Roof Fasteners

EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)



Annex H.10

of European
Technical Assessment
ETA-23/0651

DVP-DF-8240XH or EPM-8240XH-7.0-1.0

EDS-BZTHD-48xLL or
ERSS-48xLL-3-HWH-15C

EDS-BGTHD-48xLL or
ERSS-48xLL-3-HWH-15C-C

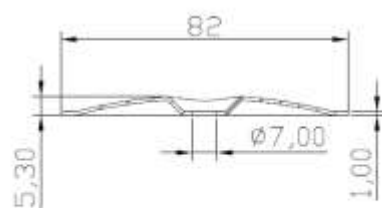




OR



DVP-EFB-8240D or EPM-B-8240D-4.85-1.0

EDS-BZTHD-48xLL or
ERSS-48xLL-3-HWH-15C

EDS-BGTHD-48xLL or
ERSS-48xLL-3-HWH-15C-C

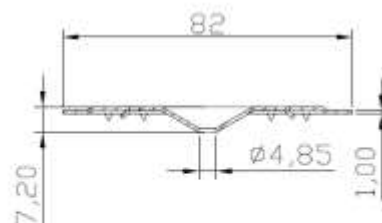

Eurofast Flat Roof Fasteners




EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)

Annex H.11

of European
Technical Assessment
ETA-23/0651




DVP-DFB-8240D or EPM-B-8240D-7.0-1.0

EDS-BZTHD-48xLL or
ERSS-48xLL-3-HWH-15C

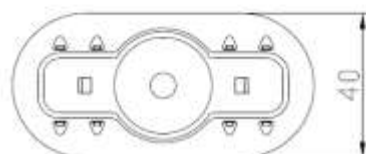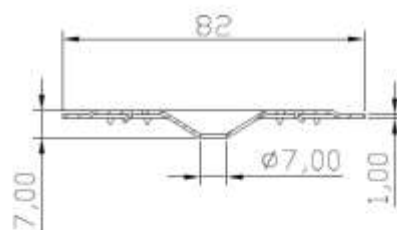
EDS-BGTHD-48xLL or
ERSS-48xLL-3-HWH-15C-C


DVP-EFZK-8240D or EPM-ZK-8240D-4.85-1.0

EDS-BZTHD-48xLL or
ERSS-48xLL-3-HWH-15C

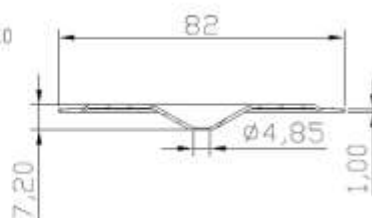EDS-BGTHD-48xLL or
ERSS-48xLL-3-HWH-15C-C


OR




Eurofast Flat Roof Fasteners

EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)

Annex H.12

of European
Technical Assessment
ETA-23/0651

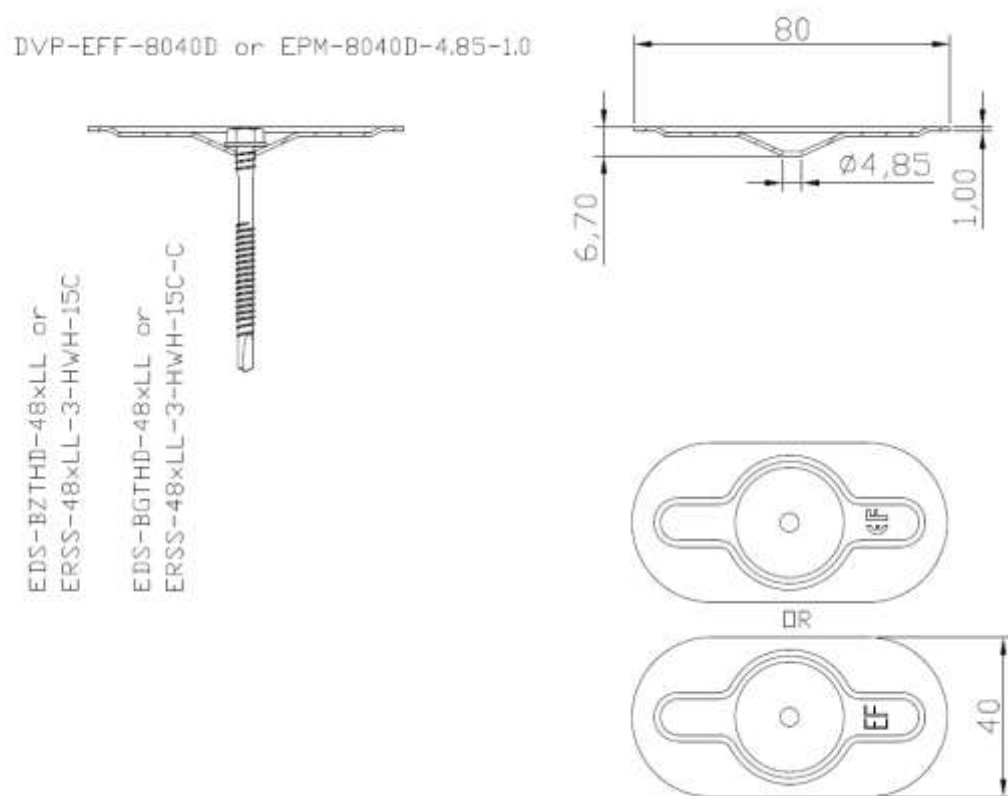


Eurofast Flat Roof Fasteners

EDS-BZTHD-48xLL (ERSS-48xLL-3-HWH-15C)
EDS-BGTHD-48xLL (ERSS-48xLL-3-HWH-15C-C)

Annex H.13

of European
Technical Assessment
ETA-23/0651

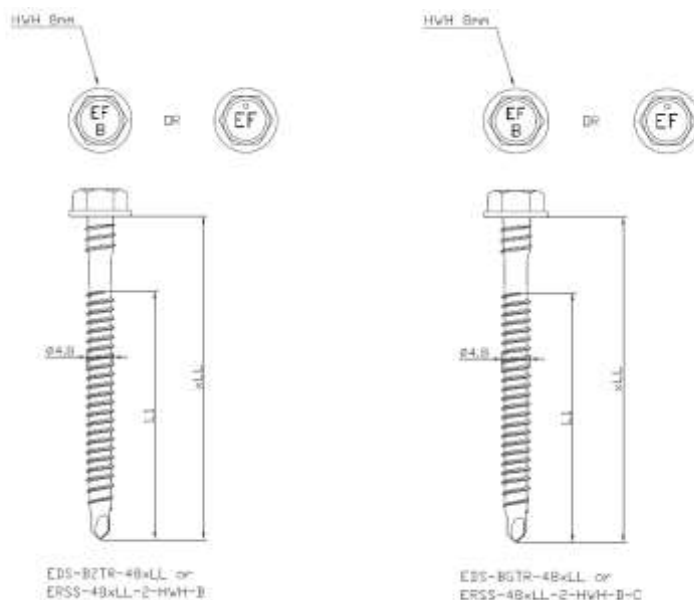

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)									
	Steel S320GD*						Aluminium		
t [mm]	0,70	0,75	0,80	0,88	1,00	1,25	0,80	0,85	1,00
EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)	1,15	1,17	1,31	1,31	1,36	2,23	0,71	0,75	1,02
EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)	1,15	1,17	1,31	1,31	1,36	2,23	0,71	0,75	1,02

* when using steel S280GD, values must be reduced by 8%

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)							
	OSB/3			Chipboard	Plywood		Timber C24
t [mm]	18	21	25	19	18	21	24
EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)	1,12	1,12	1,30	1,16	1,01	1,07	1,75
EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)	1,12	1,12	1,30	1,16	1,01	1,07	1,75

Eurofast Flat Roof Fasteners

EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)
EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)

Annex I.1

of European
Technical Assessment
ETA-23/0651

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)	DVP-EF-7010D (EPM-70D-6.5-1.0)	DVP-EF-5010D (EPM-50D-6.3-1.0)
	EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)	DVP-EF-8040D (EPM-8040D-6.5-1.0)	-
	DVP-EF-5010DFR (EPM-50D-4.85-1.0)	-	-
	DVP-EF-7070D (EPM-7070D-4.85-1.0)	-	-
	DVP-EF-7010DFR (EPM-70D-4.85-1.0)	-	-
	DVP-EF-8240D (EPM-8240D-4.85-1.0)	-	-
	DVP-EF-8240XH (EPM-8240XH-4.85-1.0)	-	-
	DVP-EFB-8240D (EPM-B-8240D-4.85-1.0)	-	-
	DVP-EFZK-8240D (EPM-ZK-8240D-4.85-1.0)	-	-
	DVP-EFF-8040D (EPM-8040D-4.85-1.0)	-	-
	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)	-	-
	EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)	8,08	5,05
	EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)	8,08	5,05
			6,86
			6,86

* "Pull-over" according to CEN/TS 17659:2021

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	DVP-DF-7070D (EPM-7070D-7.0-1.0)	DVP-EF-7005D (EPM-70D-5.0-0.5)	DVP-EF-7007D (EPM-70D-6.0-0.7)
	DVP-DF-8240D (EPM-8240D-7.0-1.0)	-	-
	DVP-DF-8240XH (EPM-8240XH-7.0-1.0)	-	-
	DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)	-	-
EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)	5,25	5,31	5,36
EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)	5,25	5,31	5,36

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)
EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)

Annex I.2
of European
Technical Assessment
ETA-23/0651

Screw:

EDS-BZTR-48xLL	(ERSS-48xLL-2-HWH-B)
EDS-BGTR-48xLL	(ERSS-48xLL-2-HWH-B-C)

Metal pressure plate:

DVP-EF-5010DFR	(EPM-50D-4.85-1.0)
DVP-EF-5010D	(EPM-50D-6.3-1.0)
DVP-EF-7070D	(EPM-7070D-4.85-1.0)
DVP-DF-7070D	(EPM-7070D-7.0-1.0)
DVP-EF-7010DFR	(EPM-70D-4.85-1.0)
DVP-EF-7005D	(EPM-70D-5.0-0.5)
DVP-EF-7007D	(EPM-70D-6.0-0.7)
DVP-EF-7010D	(EPM-70D-6.5-1.0)
DVP-EF-8040D	(EPM-8040D-6.5-1.0)
DVP-EF-8240D	(EPM-8240D-4.85-1.0)
DVP-DF-8240D	(EPM-8240D-7.0-1.0)
DVP-EF-8240XH	(EPM-8240XH-4.85-1.0)
DVP-DF-8240XH	(EPM-8240XH-7.0-1.0)
DVP-EFB-8240D	(EPM-B-8240D-4.85-1.0)
DVP-DFB-8240D	(EPM-B-8240D-7.0-1.0)
DVP-EFZK-8240D	(EPM-ZK-8240D-4.85-1.0)
DVP-EFF-8040D	(EPM-8040D-4.85-1.0)

Termination bar:


EDF-BAR F	(ETM-2250-30-4.8-8.5-1.0)
EDF-BAR FB	(ETM-B-2250-30-4.8-8.5-1.0)
EDF-BAR F-TUBE	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)

Substrate:

Steel S280		EN 10346
Steel S320		EN 10346
Aluminium	$R_m \geq 195 \text{ N/mm}^2$	EN 485
OSB/3	$\rho_{min} = 550 \text{ kg/m}^3$	EN 12369-1
Chipboard	$\rho_{min} = 600 \text{ kg/m}^3$	EN 12369-1
Plywood	$\rho_{min} = 400 \text{ kg/m}^3$	EN 12369-2
Timber, class $\geq$ C24	$\rho_{min} = 350 \text{ kg/m}^3$	EN 338

Installation data:



Max. drilling capacity in steel substrate:	2x1,25 mm
Head type:	Hex Washer Head 8 mm
Screws EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C):	Collated screws for use with DEK-FIX tool
Fixing in steel substrate:	Min. 20 mm fixed through the steel sheet
Fixing in aluminium substrate:	Min. 20 mm fixed through the aluminium sheet
Fixing in wooden and wood-based substrate:	Full thread through the substrate or minimum embedment depth
Installation force of installation tool in:	
- steel and aluminium substrate	35 kg
- wooden and wood-based substrate	45 kg
Installation tool speed:	1600 -1800 rpm
Additional feature:	Safe thread


Eurofast Flat Roof Fasteners


EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)
EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)

Annex I.3

of European
Technical Assessment
ETA-23/0651

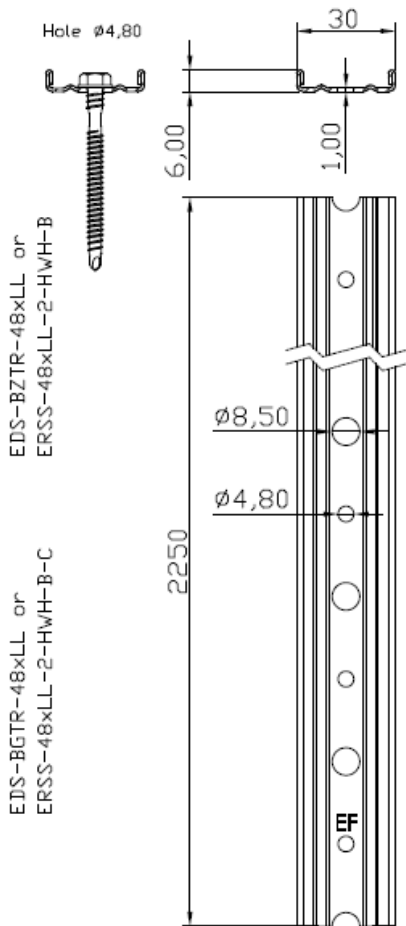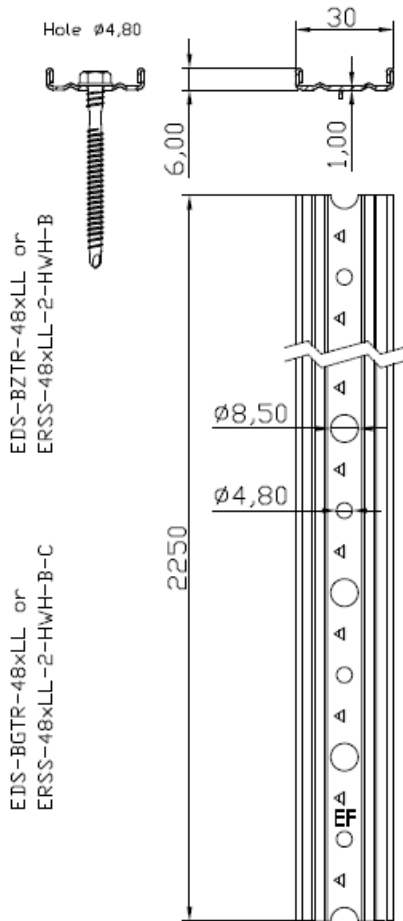EDF-BAR F or ETM-2250-30-4.8-8.5-1.0  EDS-BZTR-48xLL or ERSS-48xLL-2-HWH-B EDS-BGTR-48xLL or ERSS-48xLL-2-HWH-B-C	EDF-BAR FB or ETM-B-2250-30-4.8-8.5-1.0  EDS-BZTR-48xLL or ERSS-48xLL-2-HWH-B EDS-BGTR-48xLL or ERSS-48xLL-2-HWH-B-C	
Eurofast Flat Roof Fasteners		Annex I.4 of European Technical Assessment ETA-23/0651
EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B) EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)		

EDF-BAR-F-TUBE or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0

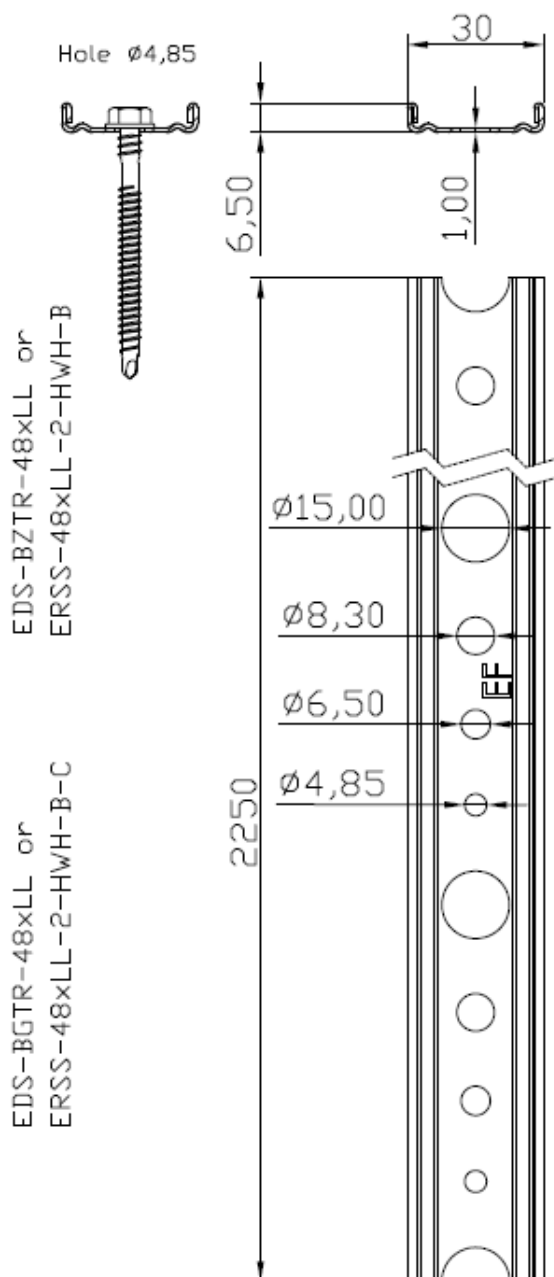

Eurofast Flat Roof Fasteners

EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)
EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)




Annex I.5

of European
Technical Assessment
ETA-23/0651

DVP-EF-5010DFR or EPM-50D-4,85-1.0

EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B




EDS-BGTR-48xLL or
ERSS-48xLL-2-HWH-B-C

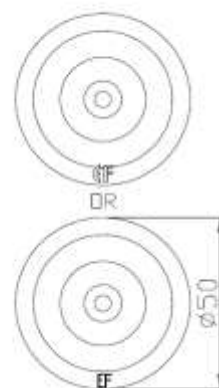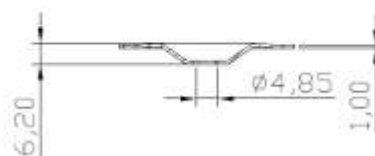

DVP-EF-5010D or EPM-50D-6,3-1.0

EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B

EDS-BGTR-48xLL or
ERSS-48xLL-2-HWH-B-C

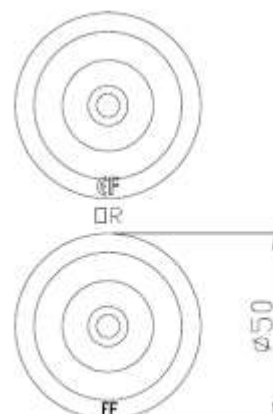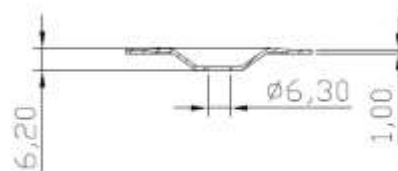

Eurofast Flat Roof Fasteners



EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)
EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)

Annex I.6
of European
Technical Assessment
ETA-23/0651

DVP-EF-7070D or EPM-7070D-4.85-1.0

EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B



EDS-BGTR-48xLL or
ERSS-48xLL-2-HWH-B-C

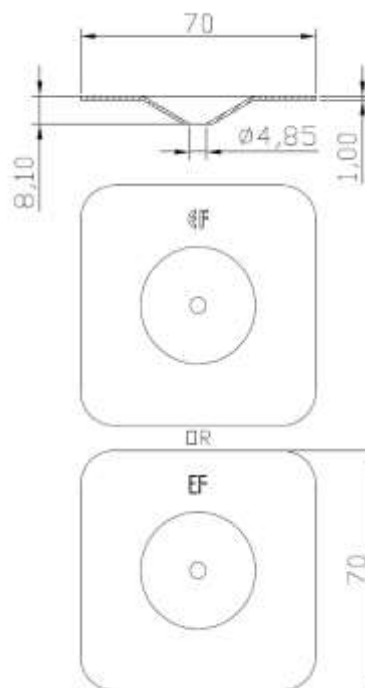

DVP-DF-7070D or EPM-7070D-7.0-1.0

EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B

EDS-BGTR-48xLL or
ERSS-48xLL-2-HWH-B-C

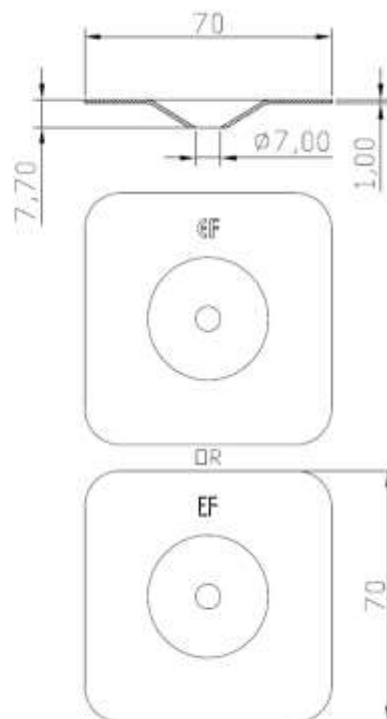

Eurofast Flat Roof Fasteners

EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)
EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)



Annex I.7

of European
Technical Assessment
ETA-23/0651

DVP-EF-7010DFR or EPM-70D-4.85-1.0

EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B



EDS-BGTR-48xLL or
ERSS-48xLL-2-HWH-B-C

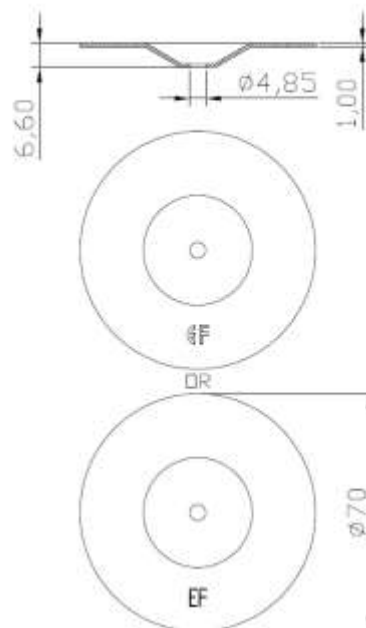

DVP-EF-7005D or EPM-70D-5.0-0.5

EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B

EDS-BGTR-48xLL or
ERSS-48xLL-2-HWH-B-C

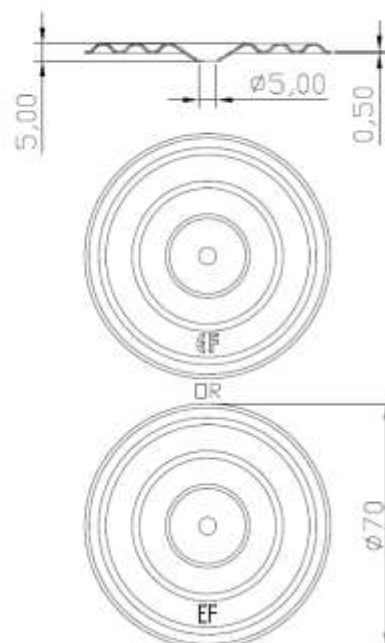



Eurofast Flat Roof Fasteners

EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)
EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)

Annex I.8
of European
Technical Assessment
ETA-23/0651



DVP-EF-7007D or EPM-70D-6.0-0.7

EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B

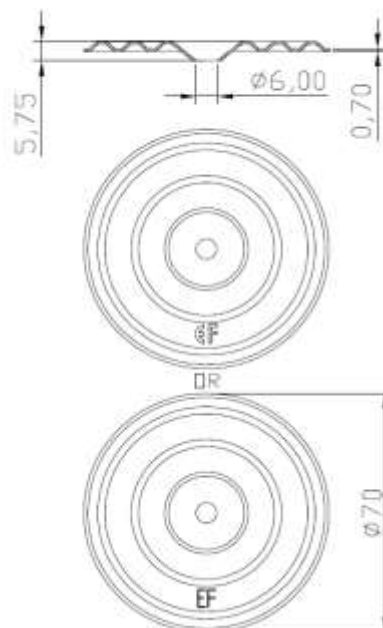EDS-BGTR-48xLL or
ERSS-48xLL-2-HWH-B-C


DVP-EF-7010D or EPM-70D-6.5-1.0

EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B

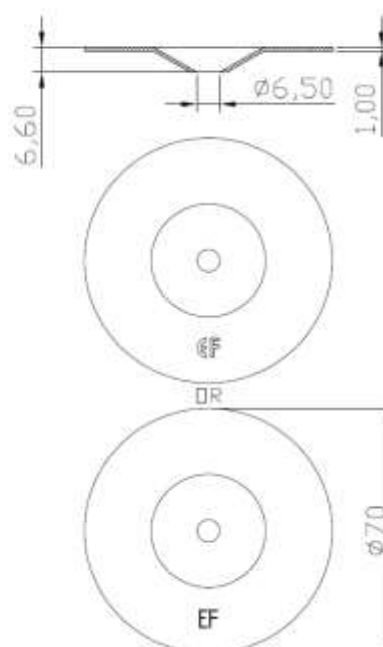EDS-BGTR-48xLL or
ERSS-48xLL-2-HWH-B-C


Eurofast Flat Roof Fasteners

EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)
EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)




Annex I.9

of European
Technical Assessment
ETA-23/0651


DVP-EF-8040D or EPM-8040D-6,5-1.0

EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B

EDS-BGTR-48xLL or
ERSS-48xLL-2-HWH-B-C

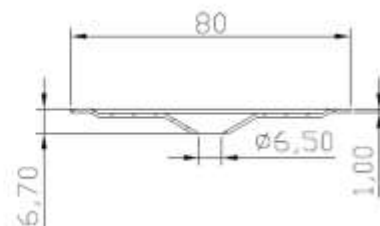




OR



DVP-EF-8240D or EPM-8240D-4.85-1.0

EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B

EDS-BGTR-48xLL or
ERSS-48xLL-2-HWH-B-C

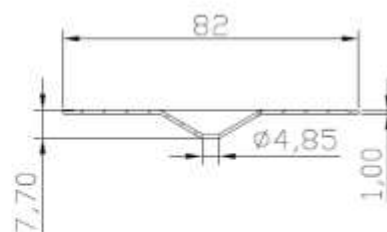

OR



Eurofast Flat Roof Fasteners


EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)

EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)


Annex I.10

of European
Technical Assessment
ETA-23/0651

DVP-DF-8240D or EPM-8240D-7,00-1,0



EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B
EDS-BGTR-48xLL or
ERSS-48xLL-2-HWH-B-C

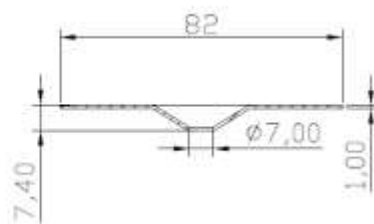


DR





40

DVP-DF-8240XH or EPM-8240XH-4,85-1,0



EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B
EDS-BGTR-48xLL or
ERSS-48xLL-2-HWH-B-C

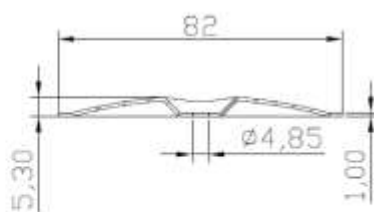

DR



40


Eurofast Flat Roof Fasteners

EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)
EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)

Annex I.11


of European
Technical Assessment
ETA-23/0651

DVP-DF-8240XH or EPM-B240XH-7,0-1,0




EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B

EDS-BGTR-48xLL or
ERSS-48xLL-2-HWH-B-C


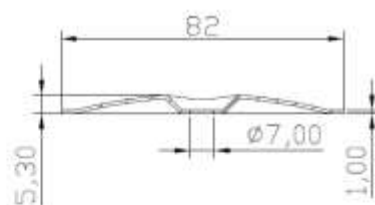


DVP-EFB-8240D or EPM-B-8240D-4,85-1,0



EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B

EDS-BGTR-48xLL or
ERSS-48xLL-2-HWH-B-C

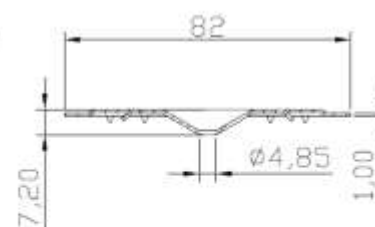

Eurofast Flat Roof Fasteners




EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)
EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)

Annex I.12

of European
Technical Assessment
ETA-23/0651




DVP-DFB-8240D or EPM-B-8240D-7,0-1,0

EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B
EDS-BGTR-48xLL or
ERSS-48xLL-2-HWH-B-C

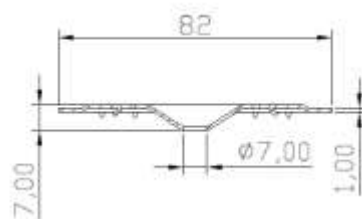


DVP-EFZK-8240D or EPM-ZK-8240D-4,85-1,0

EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B
EDS-BGTR-48xLL or
ERSS-48xLL-2-HWH-B-C

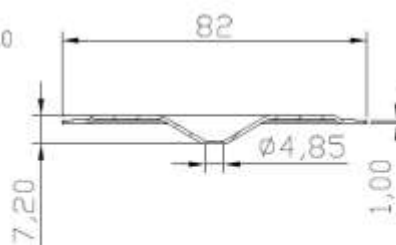

DR

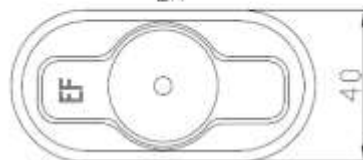


Eurofast Flat Roof Fasteners

EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)
EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)



Annex I.13

of European
Technical Assessment
ETA-23/0651


DVP-EFF-8040D or EPM-8040D-4.85-1.0



EDS-BZTR-48xLL or
ERSS-48xLL-2-HWH-B

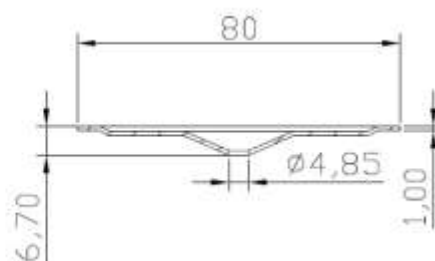

OR

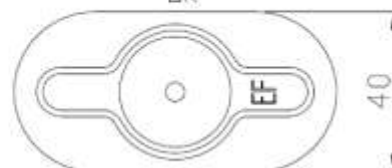


Eurofast Flat Roof Fasteners

EDS-BZTR-48xLL (ERSS-48xLL-2-HWH-B)
EDS-BGTR-48xLL (ERSS-48xLL-2-HWH-B-C)

Annex I.14

of European
Technical Assessment
ETA-23/0651

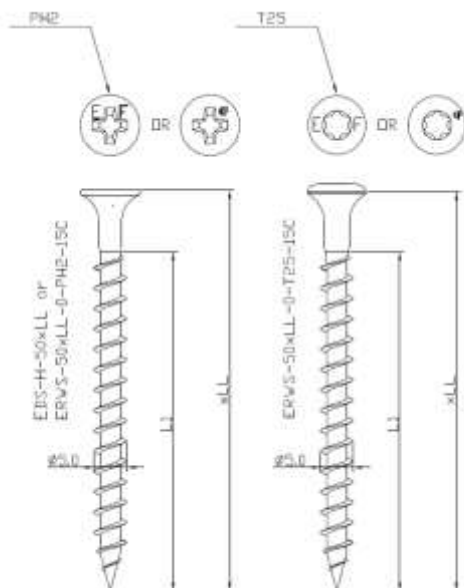

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)							
	OSB/3			Chipboard	Plywood		Timber C24
t [mm]	18	21	25	19	18	21	24
EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)	1,17	1,20	1,28	1,18	1,06	1,21	2,00
ERWS-50xLL-0-T25-15C	1,17	1,20	1,28	1,18	1,06	1,21	2,00

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)					
	DVP-EF-7007D (EPM-70D-6.0-0.7)	DVP-EFB-51NS (EPM-B-51N-5.4-0.84)	DVP-EF-51N (EPM-51N-6.7-0.84)	DVP-EF-4010N3 (EPM-N3-40N-5.85-1.0)	EPM-51N-5.6-0.84
	DVP-EF-7007H (EPM-70H-6.0-0.7)	-	-	DVP-EF-5010N3 (EPM-N3-50N-5.85-1.0)	EPM-IP-80-6.8-0.8
	DVP-EF-7007N (EPM-70N-6.0-0.7)	-	-	-	EPM-IT-80-6.8-0.8
	-	-	-	-	EPM-IE-80-6.8-0.8
EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)	2,91	3,87	2,93	3,96	2,92
ERWS-50xLL-0-T25-15C	2,91	3,87	2,93	3,96	2,92

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.1

of European
Technical Assessment
ETA-23/0651

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)

	-	TLK-45xLL (EPT-45xLL-PP)	EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)
	TRP-45xLL (EPT-45xLL-PA)	HTLK-45xLL (EPT-O-45xLL-PP)	EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)
	BTRP-45xLL (EPT-B-45xLL-PA)	TLK-75xLL (EPT-75xLL-PP)	DVP-EF-5010DFR (EPM-50D-4.85-1.0)
	TWP-8040xLL (EPT-8040xLL-PA)	DVP-DL-70N + TLK-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)	DVP-EF-7070D (EPM-7070D-4.85-1.0)
	EDF-BAR F-TUBE + KMT-15xLL (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)	-	DVP-EF-7010DFR (EPM-70D-4.85-1.0)
	DVP-KMT-8240 + KMT-15xLL (EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)	-	DVP-EF-8240D (EPM-8240D-4.85-1.0)
	EPM-T-IP-80-13.6-0.8 + KMT-15xLL (EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)	-	DVP-EF-8240XH (EPM-8240XH-4.85-1.0)
	EPM-T-IT-80-13.6-0.8 + KMT-15xLL (EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)	-	DVP-EFB-8240D (EPM-B-8240D-4.85-1.0)
	EPM-T-IE-80-13.6-0.8 + KMT-15xLL (EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)	-	DVP-EFZK-8240D (EPM-ZK-8240D-4.85-1.0)
	DVP-DL-70N + TRP-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)	-	DVP-EFF-8040D (EPM-8040D-4.85-1.0)
EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)	2,67	1,77	5,18
ERWS-50xLL-0-T25-15C	2,67	1,77	5,18

* "Pull-over" according to CEN/TS 17659:2021

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)

	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)	DVP-EF-4010N (EPM-40N-6.0-1.0)	DVP-EF-5010D (EPM-50D-6.3-1.0)	DVP-DF-7070D (EPM-7070D-7.0-1.0)	DVP-EF-7005D (EPM-70D-5.0-0.5)
	DVP-EF-7010D (EPM-70D-6.5-1.0)	KS-EPM-8240XH-6.0-1.0	DVP-EF-5010N (EPM-50N-6.3-1.0)	DVP-DF-8240D (EPM-8240D-7.0-1.0)	DVP-EF-7005N (EPM-70N-5.1-0.5)
	DVP-EF-7010N (EPM-70N-6.5-1.0)	-	-	DVP-DF-8240H (EPM-8240H-7.0-1.0)	-
	DVP-EF-8040D (EPM-8040D-6.5-1.0)	-	-	DVP-DF-8240XH (EPM-8240XH-7.0-1.0)	-
	DVP-EF-8040N (EPM-8040N-6.5-1.0)	-	-	DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)	-
	-	-	-	EBS-xxxxx-25-7.1-1.25 (BC-EBS-xxxxx-25-7.1-1.25)	-
EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)	5,05	4,43	3,89	2,96	2,36
ERWS-50xLL-0-T25-15C	5,05	4,43	3,89	2,96	2,36

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.2

of European
Technical Assessment
ETA-23/0651

Screw:

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Metal pressure plate:

DVP-EF-4010N	(EPM-40N-6.0-1.0)	EPM-51N-5.6-0.84	
DVP-EF-5010DFR	(EPM-50D-4.85-1.0)	DVP-EFB-8240D	(EPM-B-8240D-4.85-1.0)
DVP-EF-5010D	(EPM-50D-6.3-1.0)	DVP-DFB-8240D	(EPM-B-8240D-7.0-1.0)
DVP-EF-5010N	(EPM-50N-6.3-1.0)	DVP-EFZK-8240D	(EPM-ZK-8240D-4.85-1.0)
DVP-EF-7070D	(EPM-7070D-4.85-1.0)	DVP-EF-4010N3	(EPM-N3-40N-5.85-1.0)
DVP-DF-7070D	(EPM-7070D-7.0-1.0)	DVP-EF-5010N3	(EPM-N3-50N-5.85-1.0)
DVP-EF-7010DFR	(EPM-70D-4.85-1.0)	DVP-EFF-8040D	(EPM-8040D-4.85-1.0)
DVP-EF-7005D	(EPM-70D-5.0-0.5)	EPM-IP-80-6.8-0.8	
DVP-EF-7007D	(EPM-70D-6.0-0.7)	EPM-IT-80-6.8-0.8	
DVP-EF-7010D	(EPM-70D-6.5-1.0)	EPM-IE-80-6.8-0.8	
DVP-EF-7007H	(EPM-70H-6.0-0.7)	DVP-KMT-8240 + KMT-15xLL	(EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)
DVP-EF-7005N	(EPM-70N-5.1-0.5)	EPM-T-IP-80-13.6-0.8 + KMT-15xLL	(EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-7007N	(EPM-70N-6.0-0.7)	EPM-T-IT-80-13.6-0.8 + KMT-15xLL	(EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-7010N	(EPM-70N-6.5-1.0)	EPM-T-IE-80-13.6-0.8 + KMT-15xLL	(EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8040D	(EPM-8040D-6.5-1.0)	DVP-DL-70N + TRP-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)
DVP-EF-8040N	(EPM-8040N-6.5-1.0)	DVP-DL-70N + TLK-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)
DVP-EF-8240D	(EPM-8240D-4.85-1.0)	KS-EPM-8240XH-6.0-1.0	
DVP-DF-8240D	(EPM-8240D-7.0-1.0)		
DVP-DF-8240H	(EPM-8240H-7.0-1.0)		
DVP-EF-8240XH	(EPM-8240XH-4.85-1.0)		
DVP-DF-8240XH	(EPM-8240XH-7.0-1.0)		
DVP-EFB-51NS	(EPM-B-51N-5.4-0.84)		
DVP-EF-51N	(EPM-51N-6.7-0.84)		

Pressure plate with tube:

TRP-45xLL	(EPT-45xLL-PA)
BTRP-45xLL	(EPT-B-45xLL-PA)
TWP-8040xLL	(EPT-8040xLL-PA)
TLK-45xLL	(EPT-45xLL-PP)
HTLK-45xLL	(EPT-O-45xLL-PP)
TLK-75xLL	(EPT-75xLL-PP)

Termination bar:

EDF-BAR F	(ETM-2250-30-4.8-8.5-1.0)
EDF-BAR FB	(ETM-B-2250-30-4.8-8.5-1.0)
EDF-BAR F-TUBE	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)
EDF-BAR F-TUBE + KMT-15xLL	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)
EBS-xxxxx-25-7.1-1.25	(BC-EBS-xxxxx-25-7.1-1.25)

Substrate:

OSB/3	$\rho_{min} = 550 \text{ kg/m}^3$	EN 12369-1
Chipboard	$\rho_{min} = 600 \text{ kg/m}^3$	EN 12369-1
Plywood	$\rho_{min} = 400 \text{ kg/m}^3$	EN 12369-2
Timber, class $\geq$ C24	$\rho_{min} = 350 \text{ kg/m}^3$	EN 338

Installation data:


Head type:	Bugle Head / Raised Bugle Head
Recess:	PH2 / TX25
Fixing in wooden and wood-based substrate:	Full thread through the substrate or minimum embedment depth
Installation force of installation tool:	30 kg
Installation tool speed:	2000 - 2500 rpm

Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.3



of European
Technical Assessment
ETA-23/0651

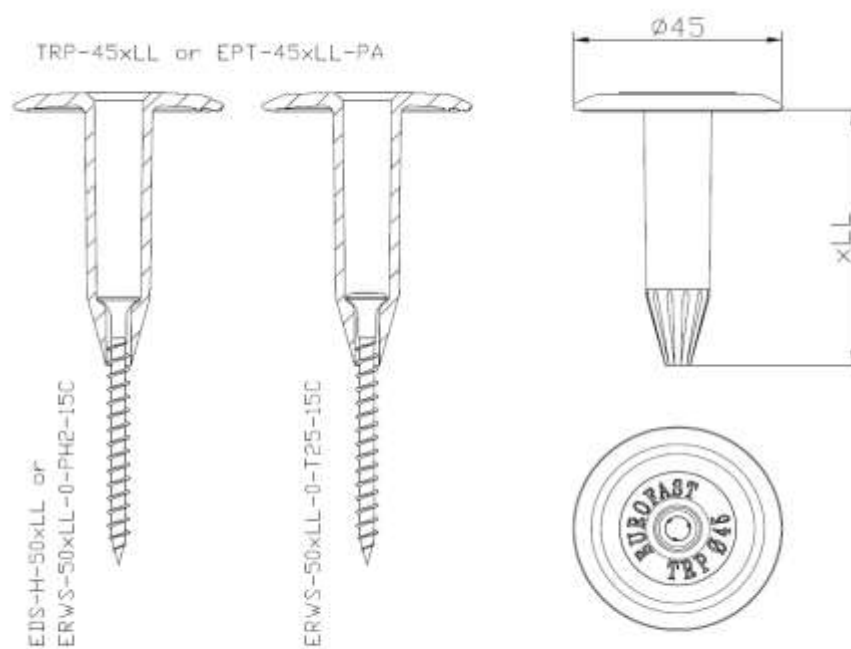

Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.4
of European
Technical Assessment
ETA-23/0651

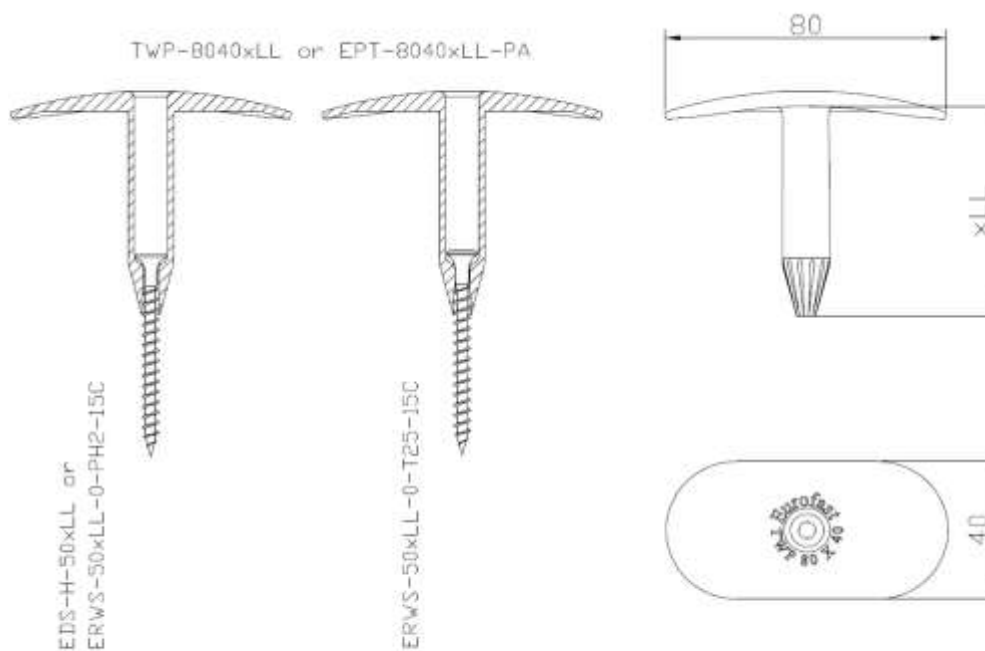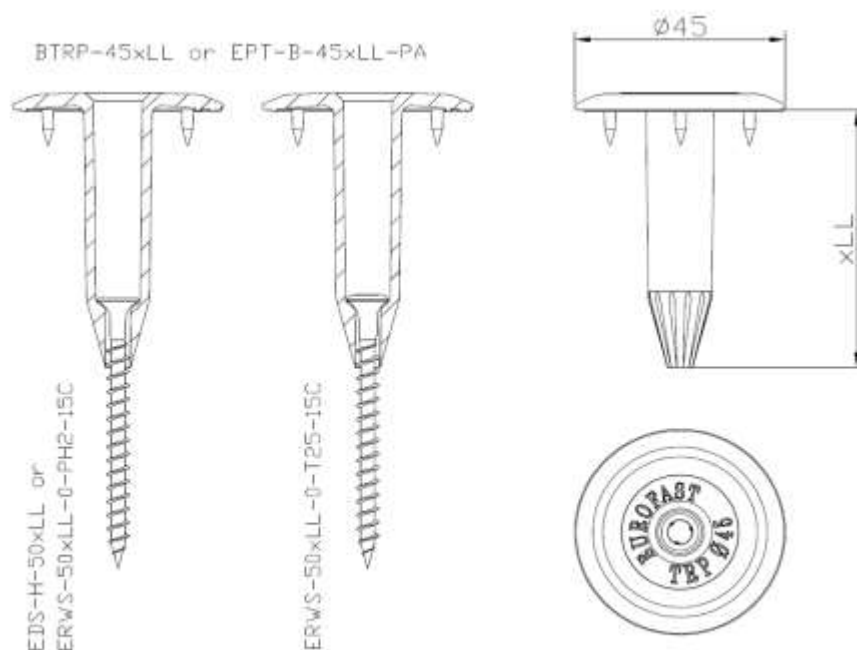


Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C


Annex J.5

of European
Technical Assessment
ETA-23/0651

EDF-BAR-F-TUBE + KMT-15xLL or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0
+ EPT-15xLL-PA

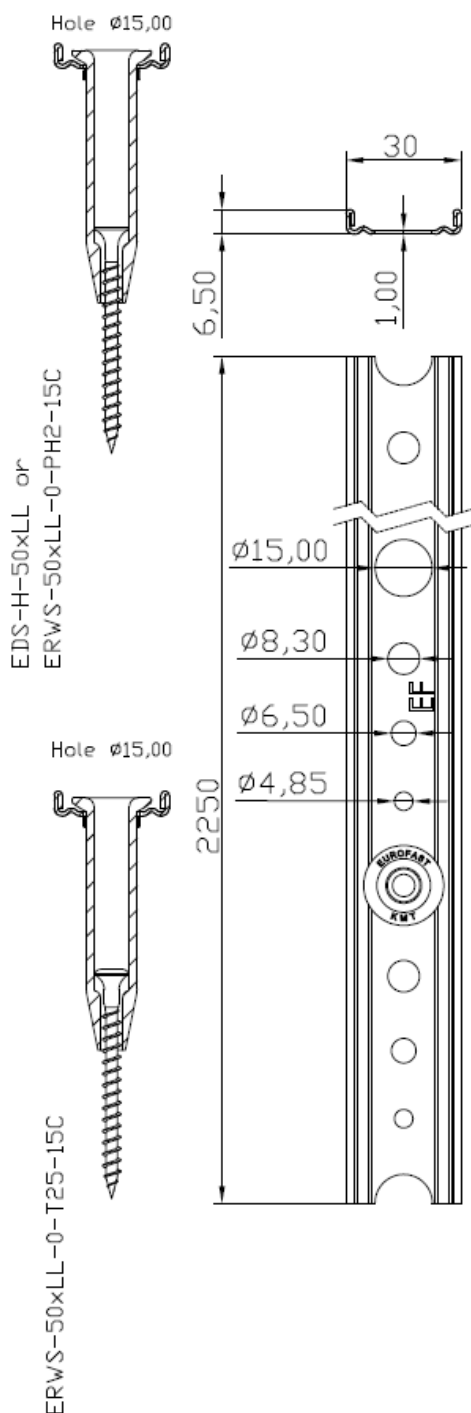

EDF-BAR-F-TUBE or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0

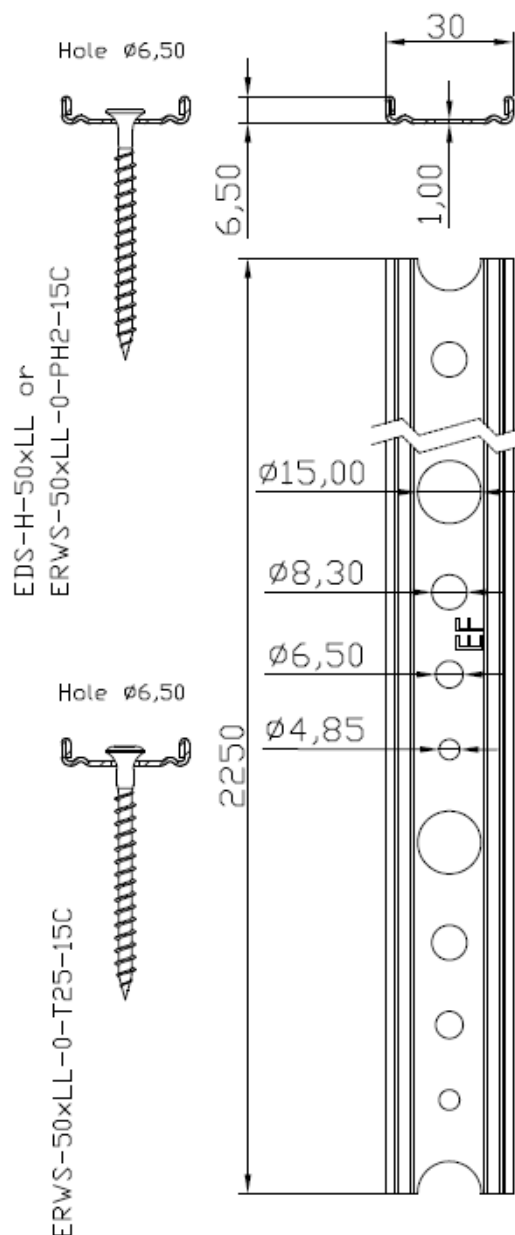


Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C


Annex J.6

of European
Technical Assessment
ETA-23/0651

EDF-BAR F or
ETM-2250-30-4.8-8.5-1.0

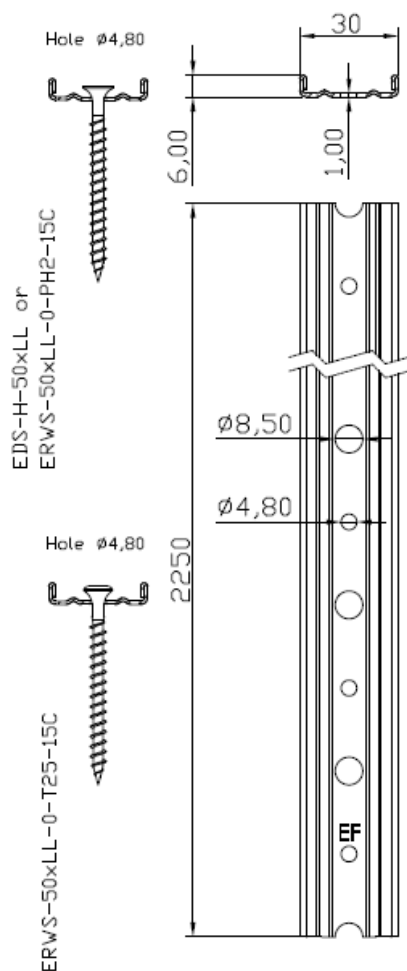

EDF-BAR FB or
ETM-B-2250-30-4.8-8.5-1.0


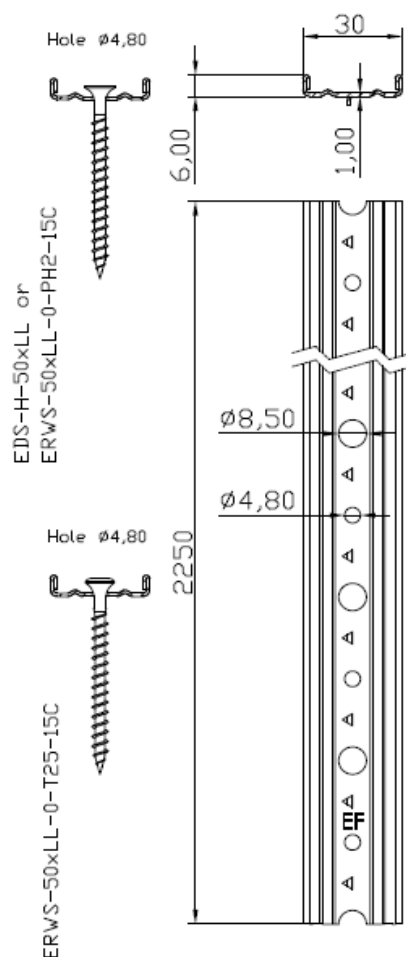


Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.7



of European
Technical Assessment
ETA-23/0651

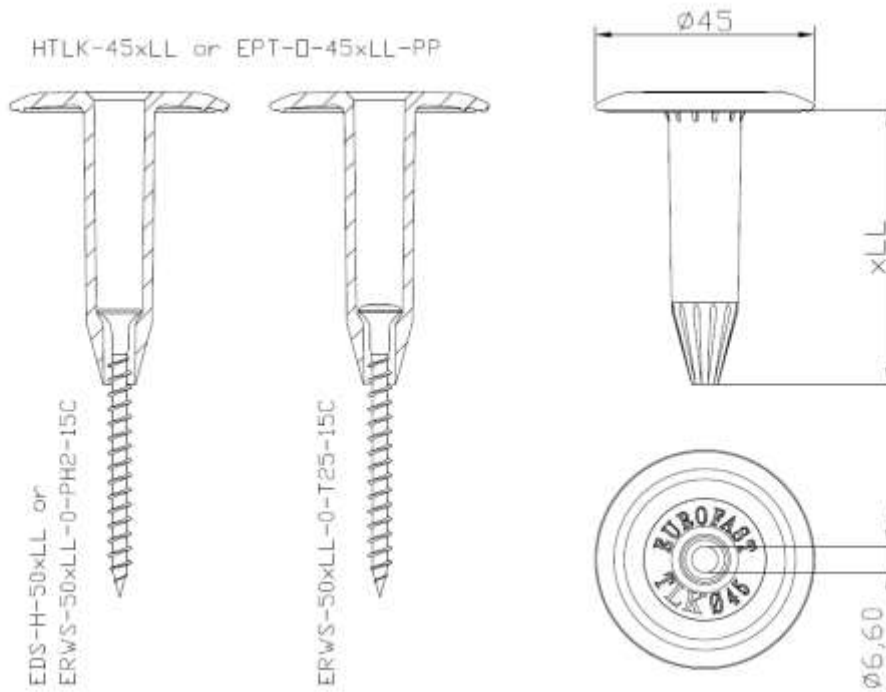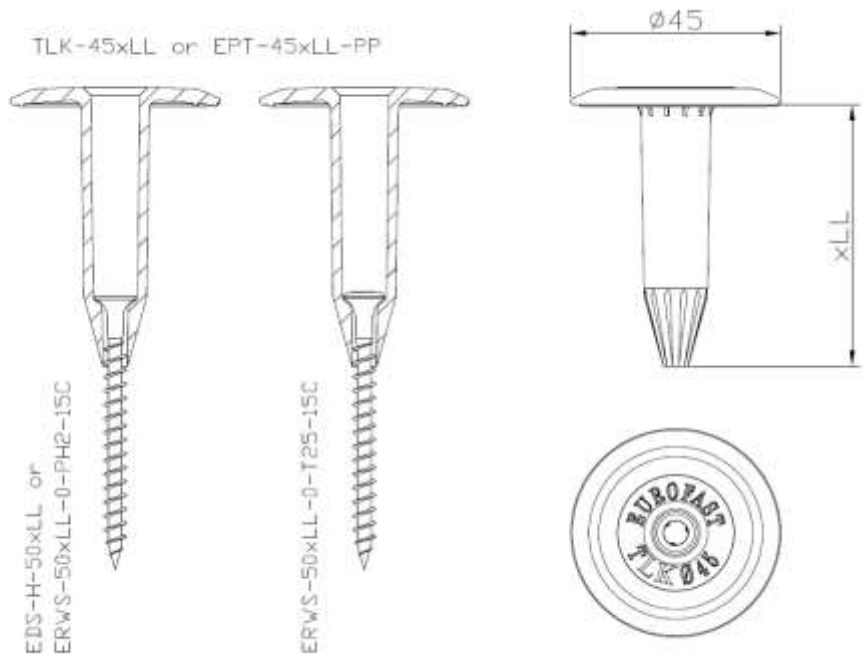

Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.8
of European
Technical Assessment
ETA-23/0651


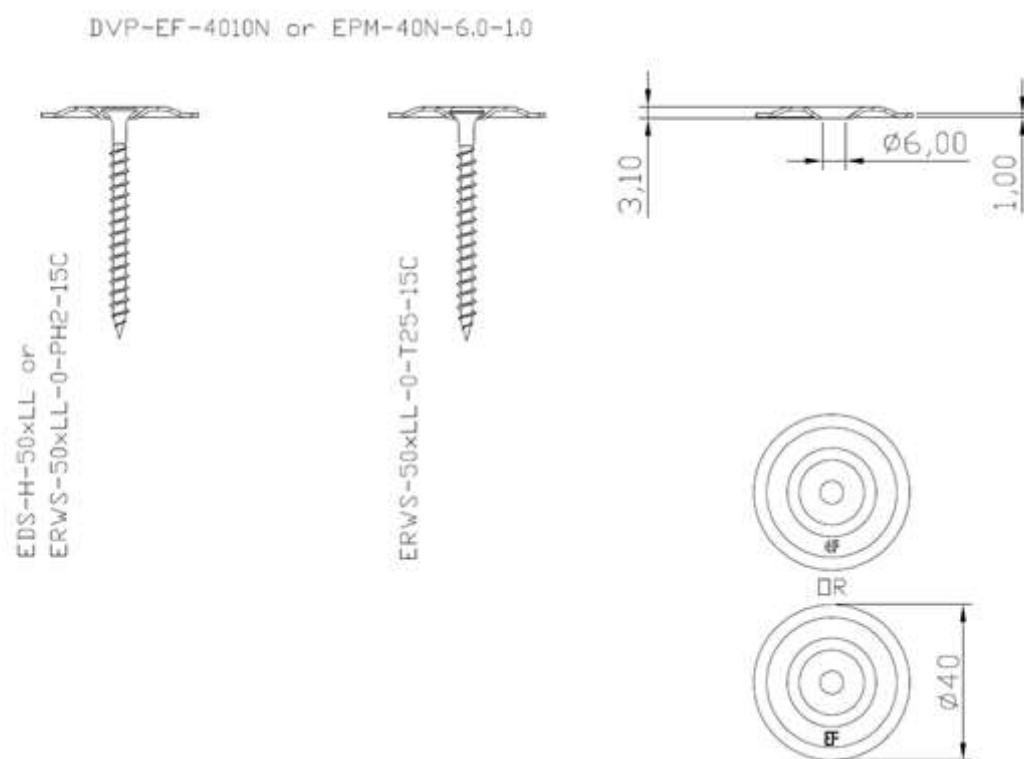
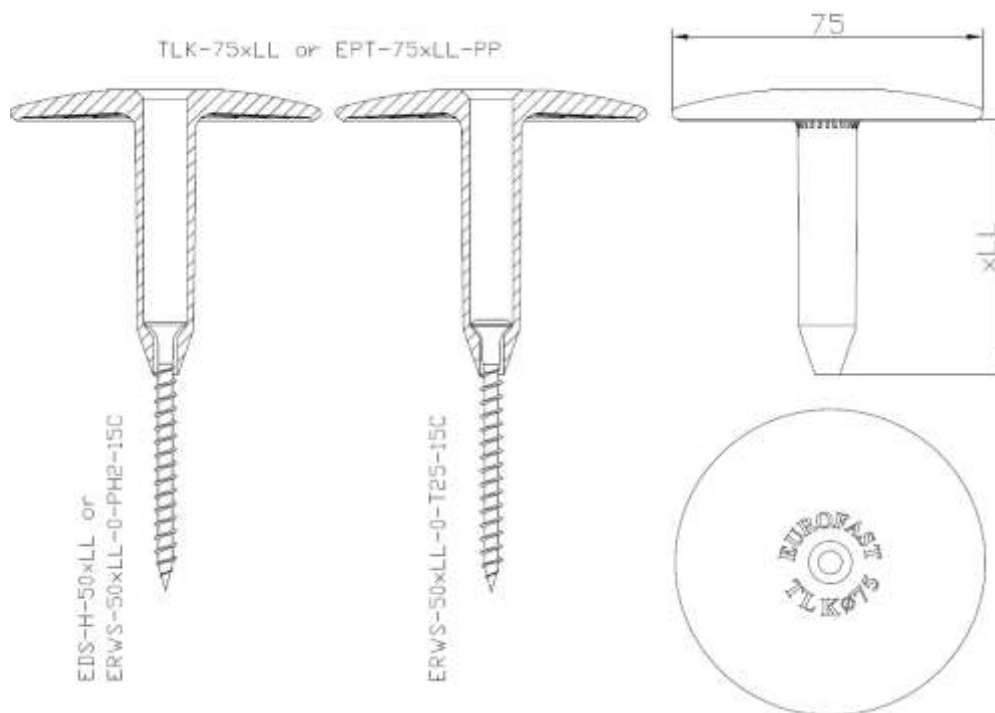




Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.9

of European
Technical Assessment
ETA-23/0651

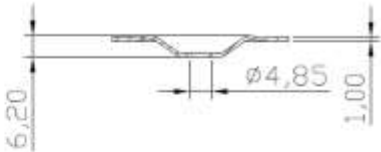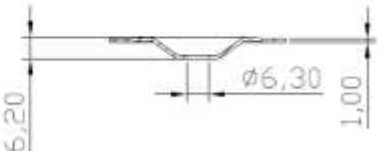DVP-EF-5010DFR or EPM-50D-4,85-1,0    EDS-H-50xLL or ERWS-50xLL-0-PH2-15C ERWS-50xLL-0-T25-15C  OR 	
DVP-EF-5010D or EPM-50D-6,3-1,0    EDS-H-50xLL or ERWS-50xLL-0-PH2-15C ERWS-50xLL-0-T25-15C  OR 	
Eurofast Flat Roof Fasteners	Annex J.10 of European Technical Assessment ETA-23/0651
EDS-H-50xLL (ERWS-50xLL-0-PH2-15C) ERWS-50xLL-0-T25-15C	

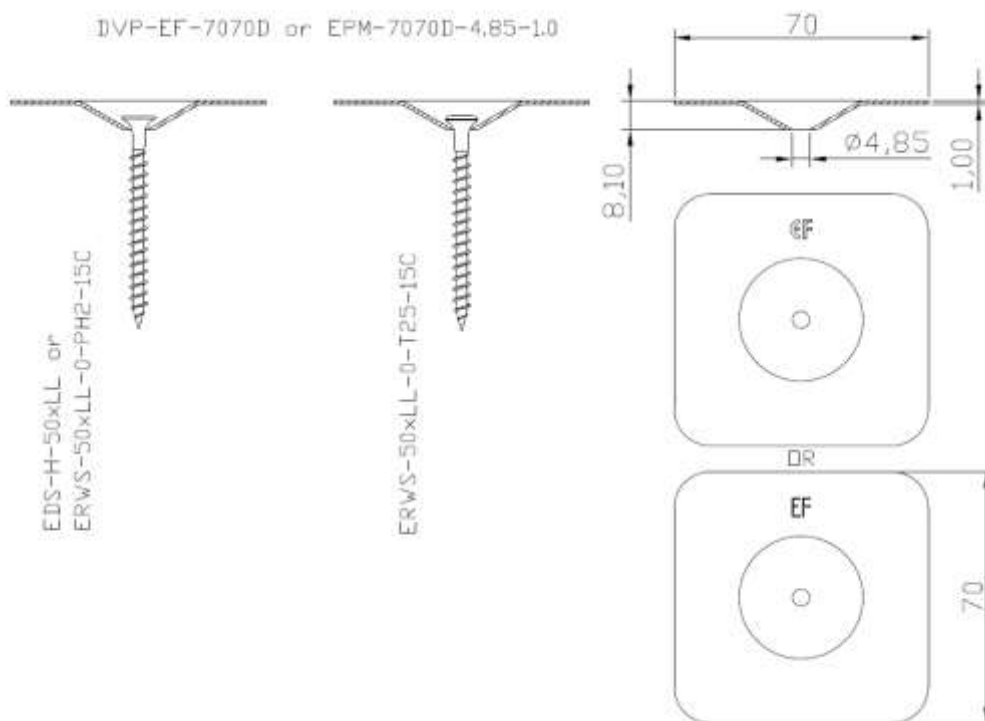
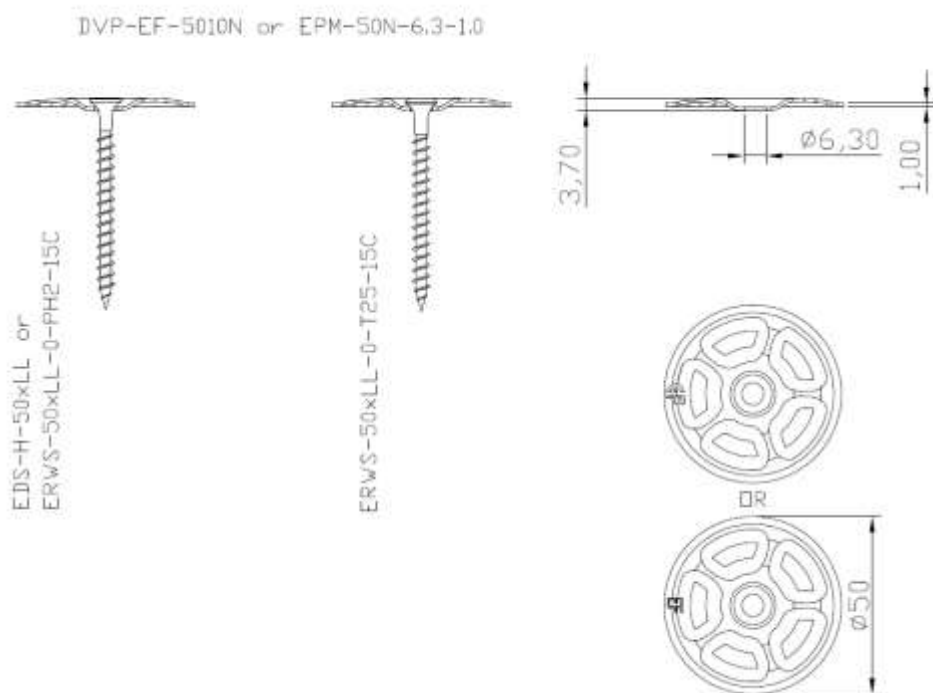


Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.11

of European
Technical Assessment
ETA-23/0651

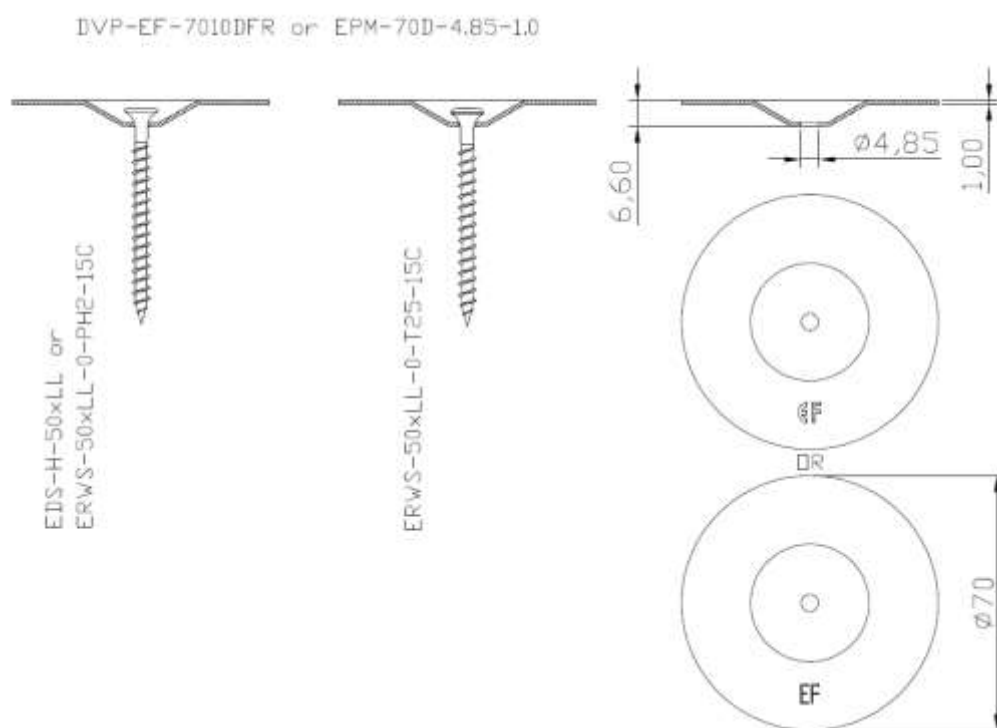
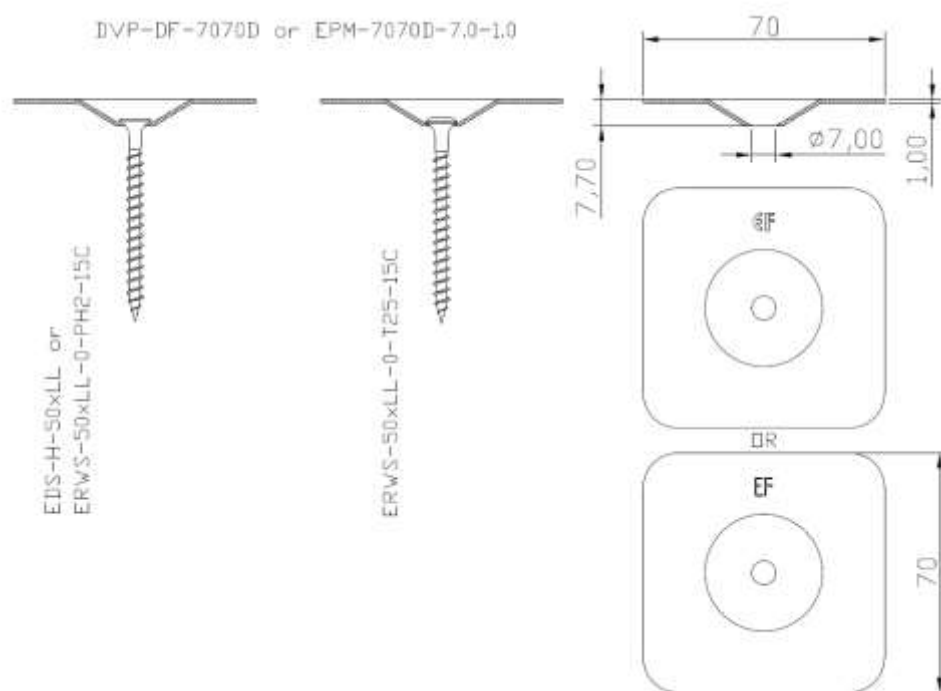


Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.12

of European
Technical Assessment
ETA-23/0651

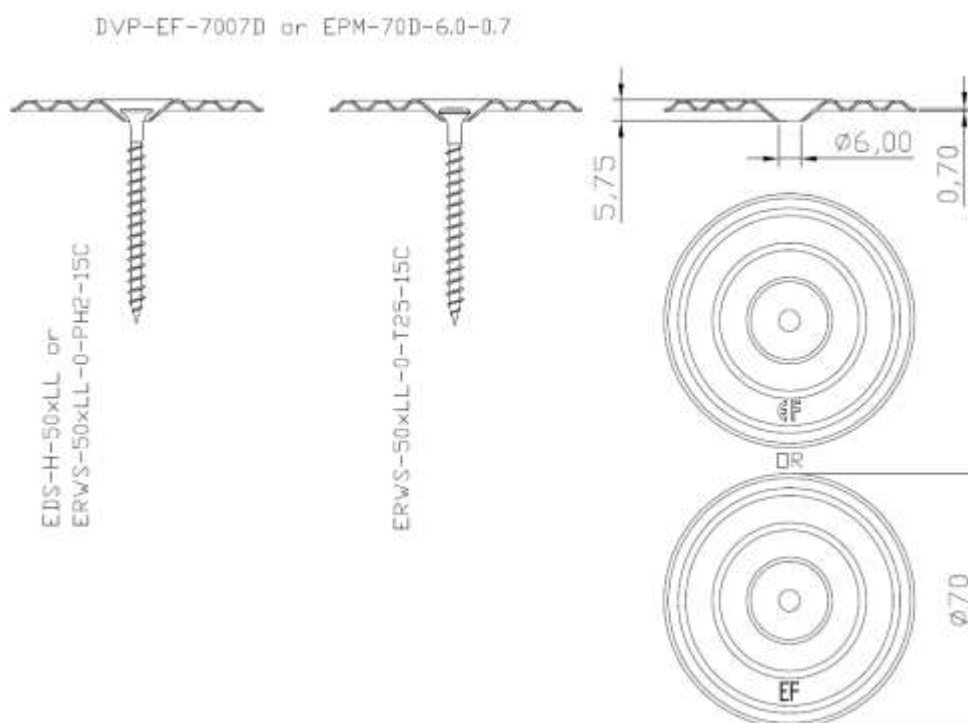
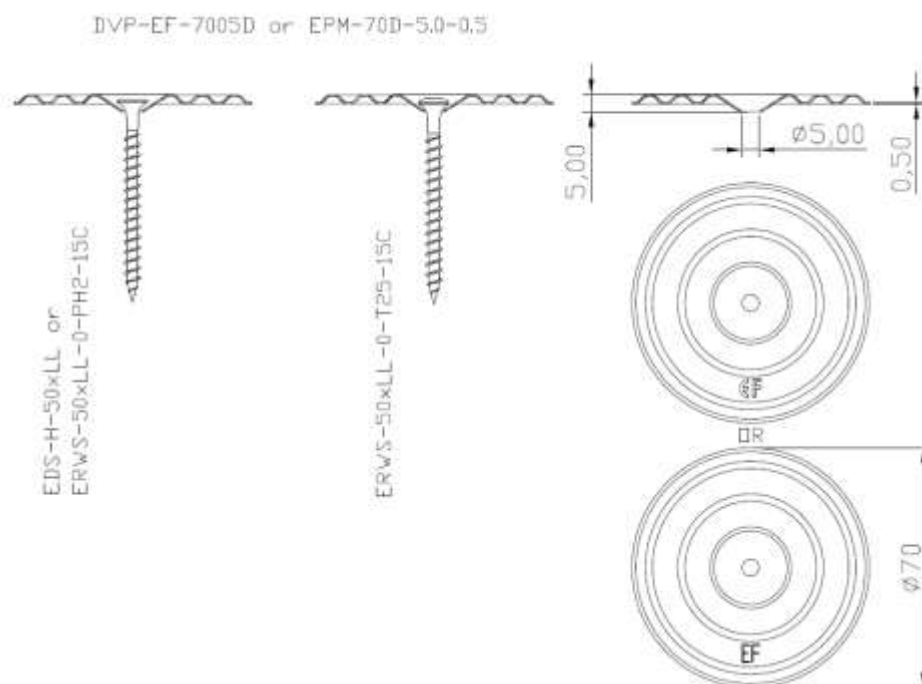


Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.13

of European
Technical Assessment
ETA-23/0651

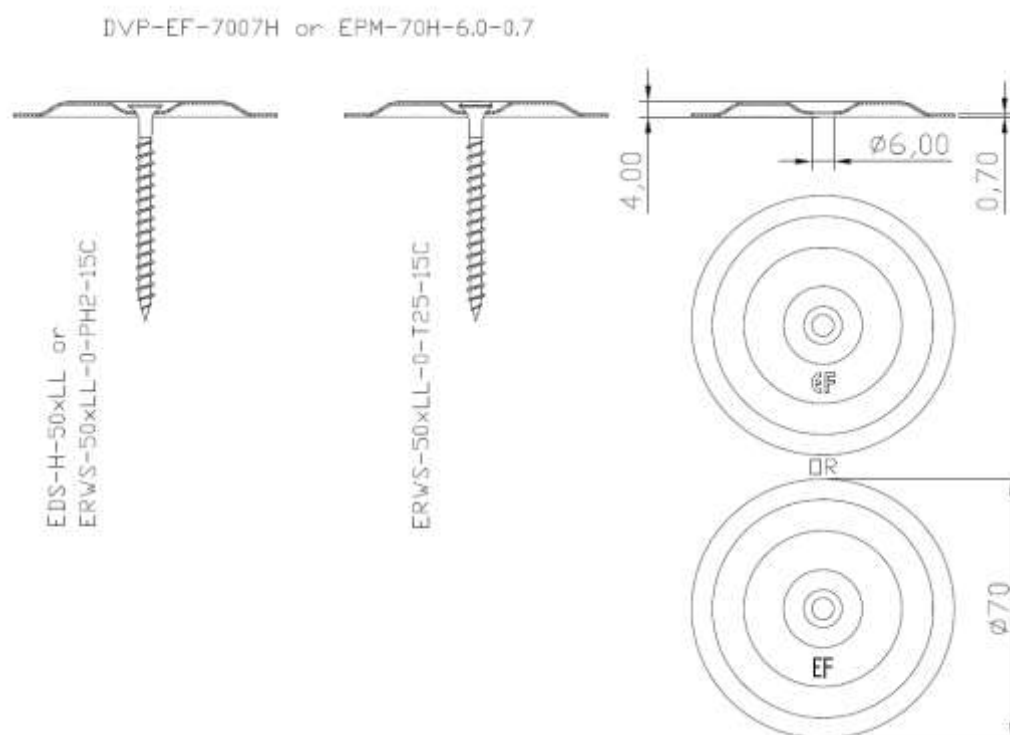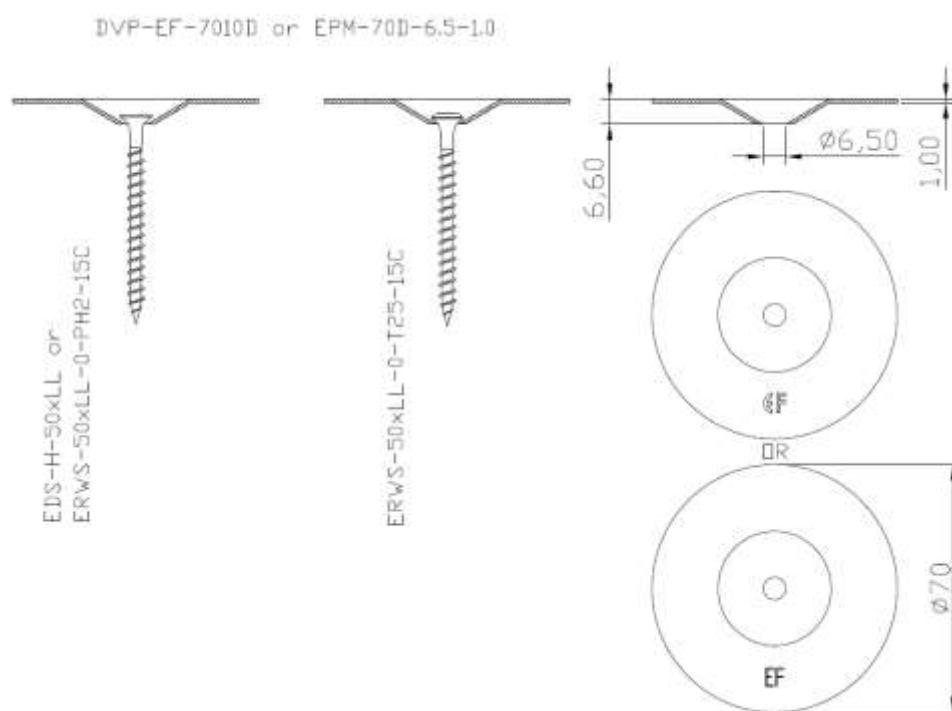


Eurofast Flat Roof Fasteners


EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.14
of European
Technical Assessment
ETA-23/0651

DVP-EF-7005N or EPM-70N-5.1-0.5

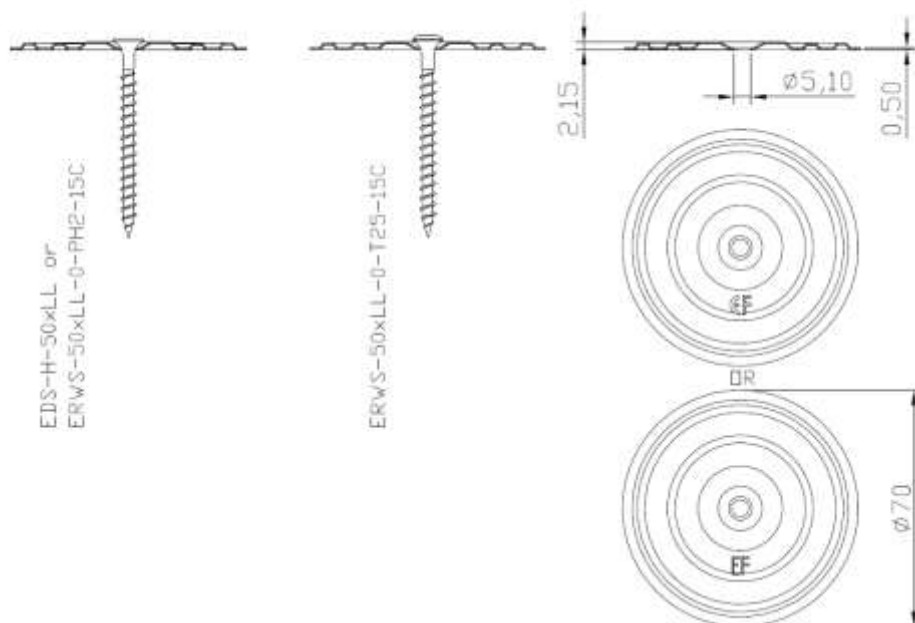

DVP-EF-7007N or EPM-70N-6.0-0.7


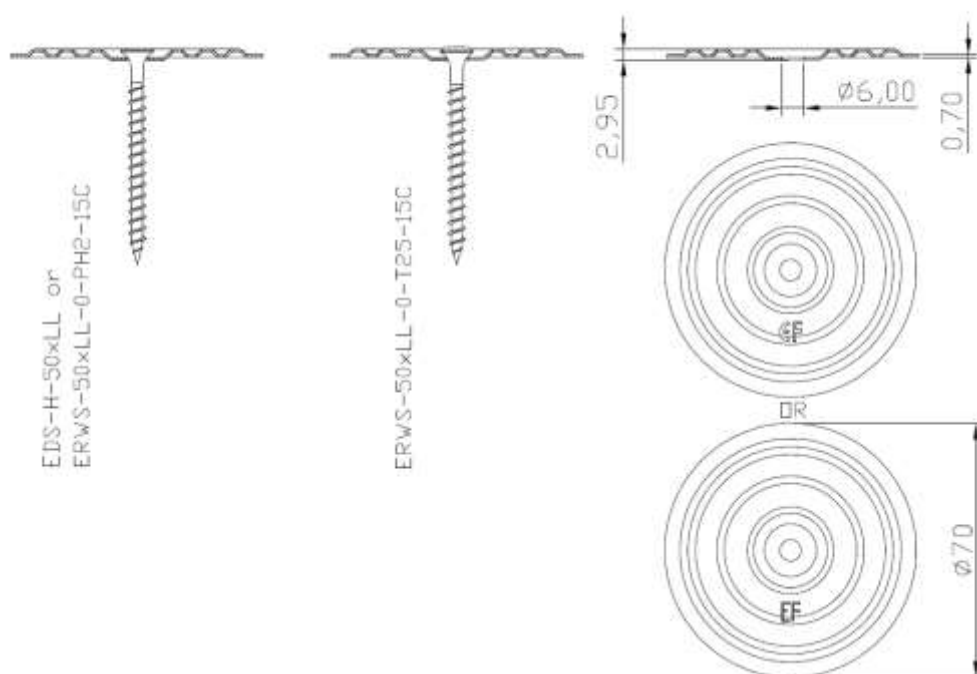


Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.15

of European
Technical Assessment
ETA-23/0651

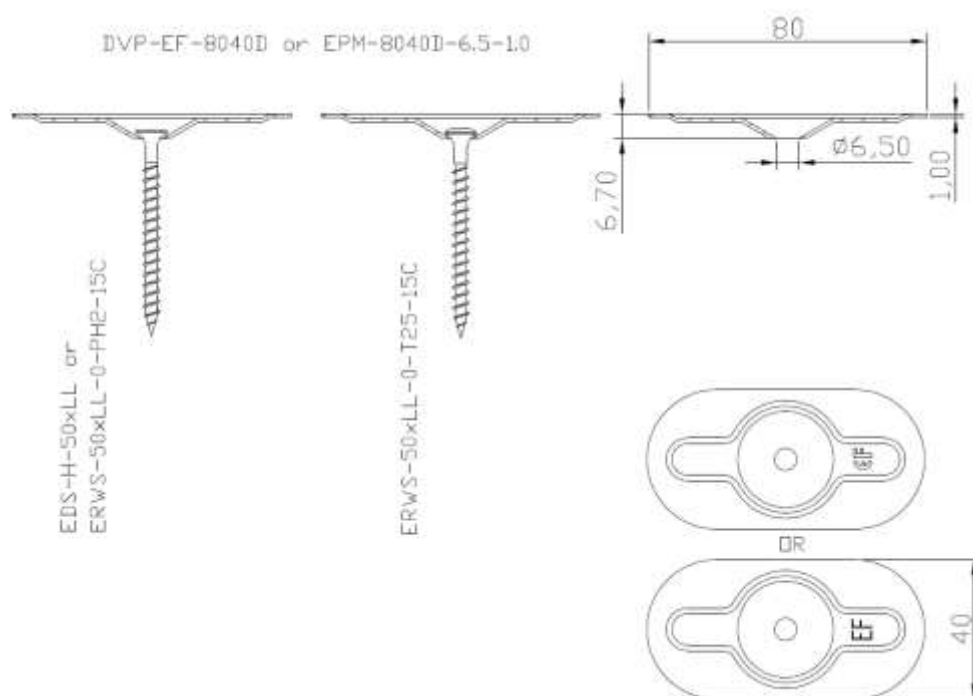
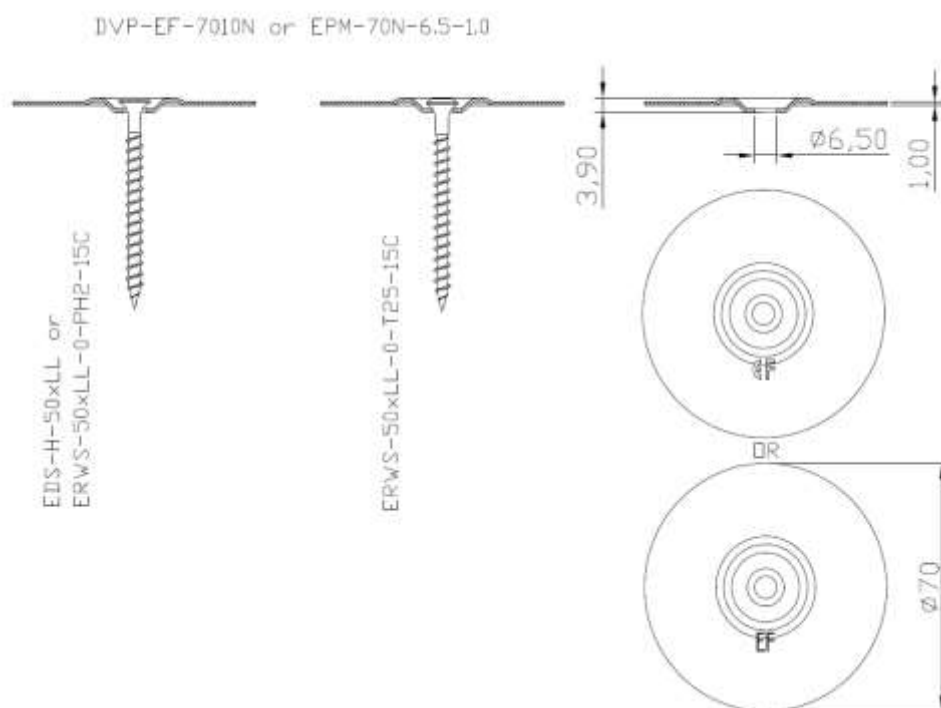


Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.16

of European
Technical Assessment
ETA-23/0651

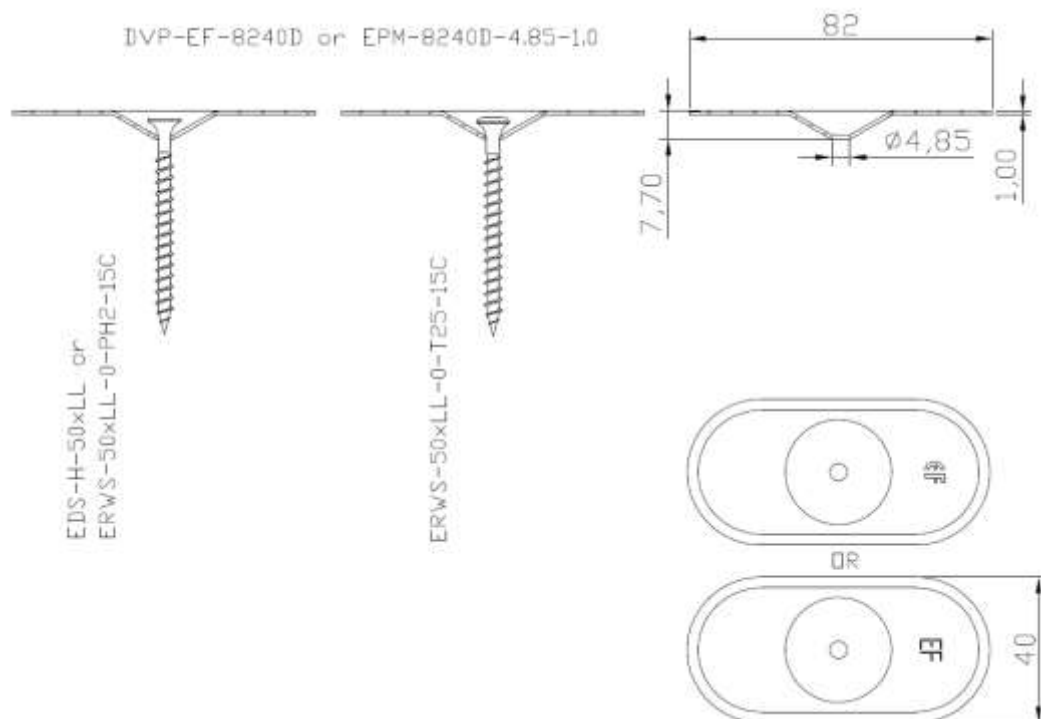
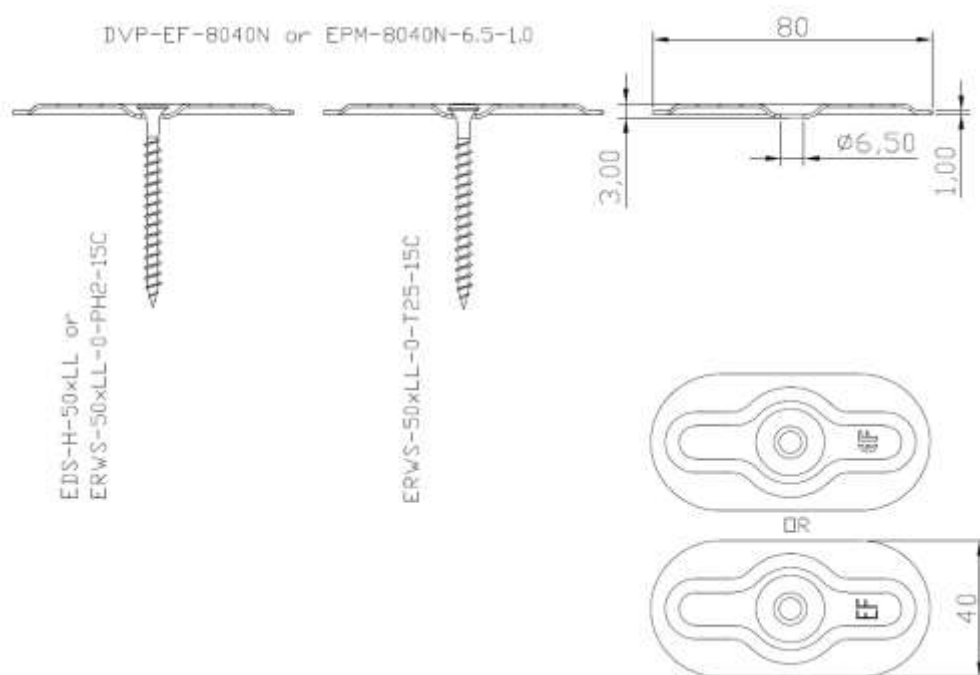




Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.17

of European
Technical Assessment
ETA-23/0651

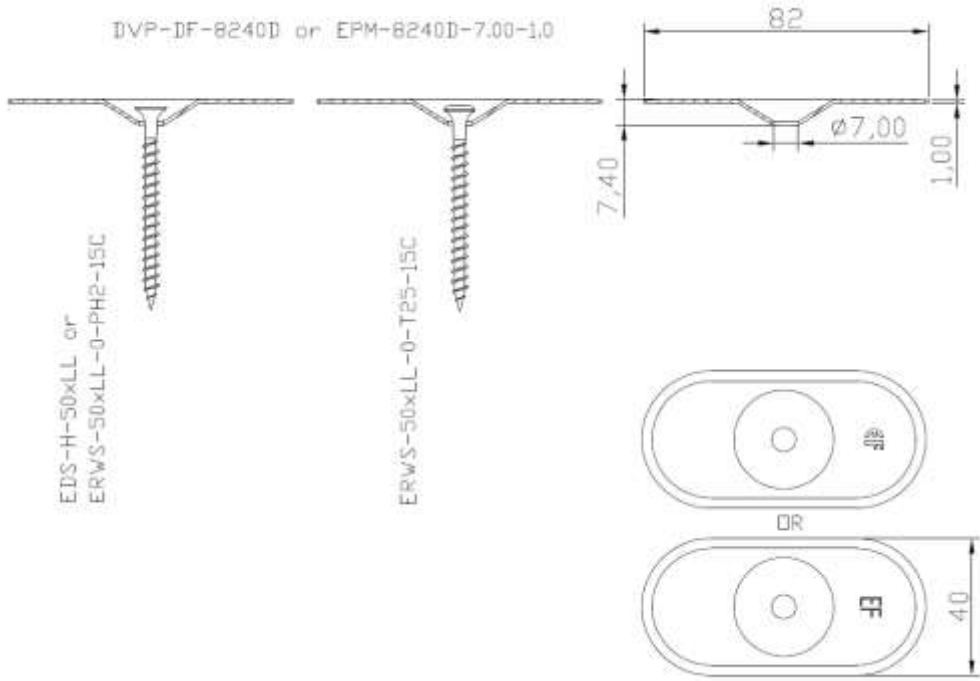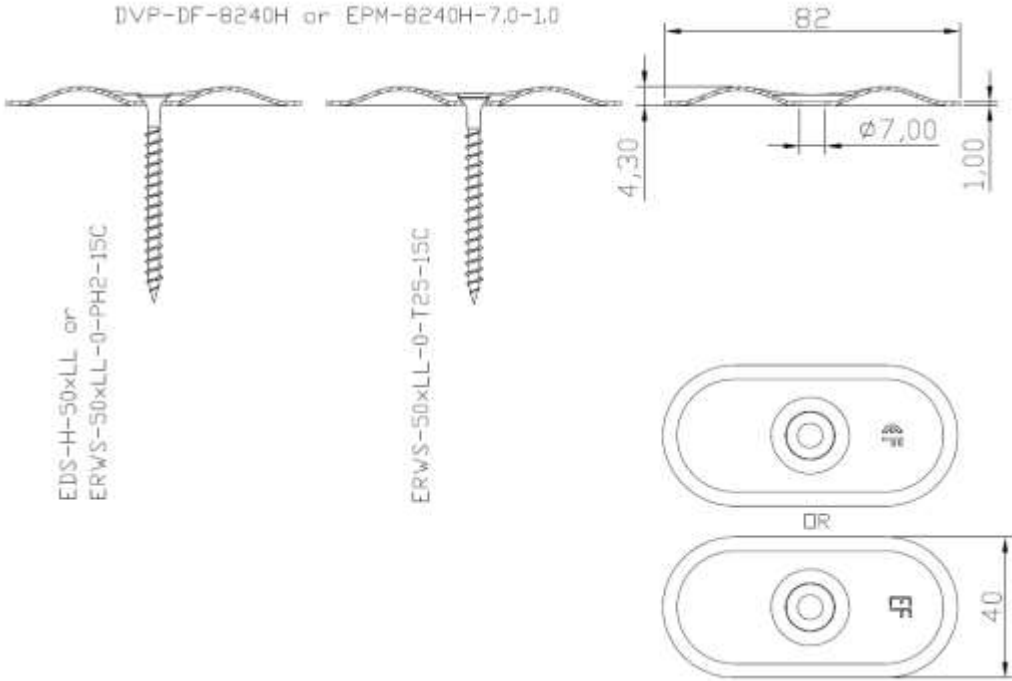 DVP-DF-8240D or EPM-8240D-7.00-1.0 EDS-H-50xLL or ERWS-50xLL-0-PH2-15C ERWS-50xLL-0-T25-15C 82 7,40 1,00 Ø7,00 OR 40	
 DVP-DF-8240H or EPM-8240H-7.0-1.0 EDS-H-50xLL or ERWS-50xLL-0-PH2-15C ERWS-50xLL-0-T25-15C 82 4,30 1,00 Ø7,00 OR 40	
Eurofast Flat Roof Fasteners	
EDS-H-50xLL (ERWS-50xLL-0-PH2-15C) ERWS-50xLL-0-T25-15C	Annex J.18 of European Technical Assessment ETA-23/0651

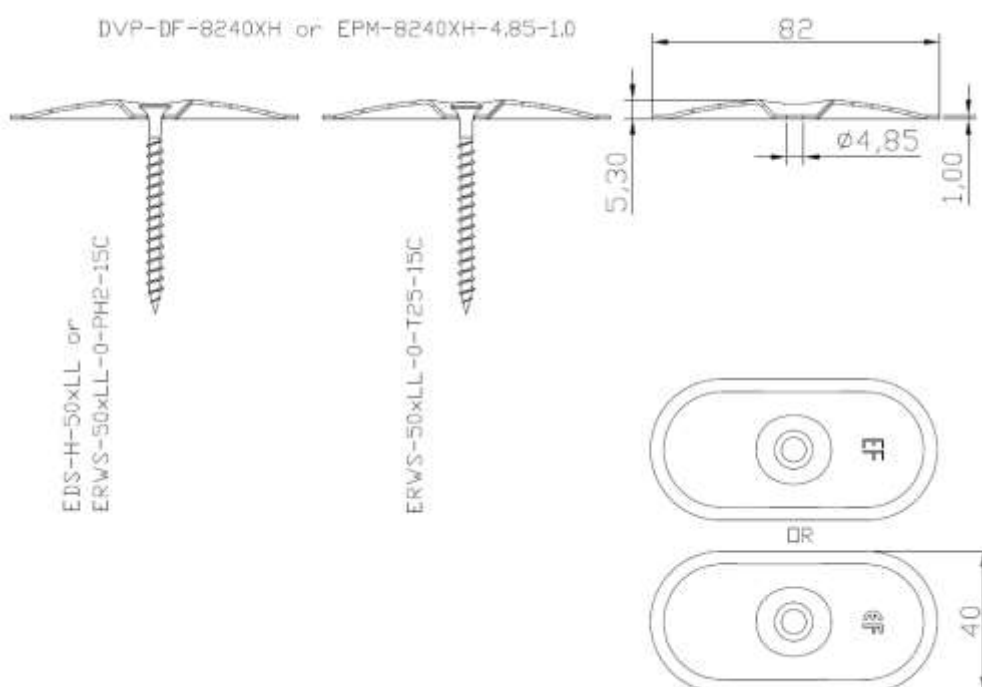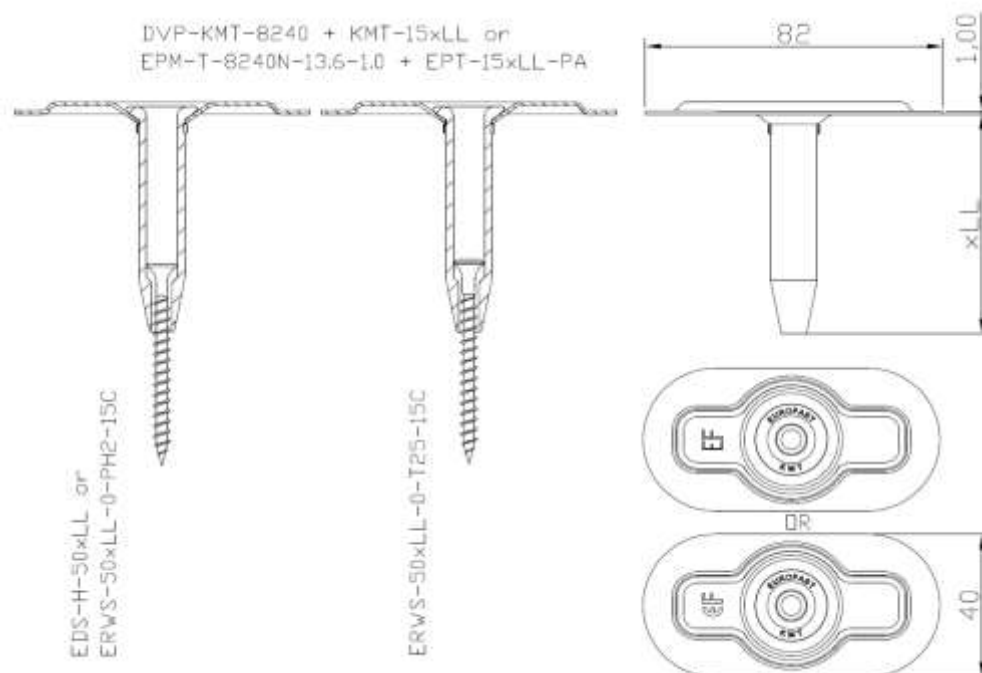

Eurofast Flat Roof Fasteners



EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.19


of European
Technical Assessment
ETA-23/0651

DVP-DF-8240XH or EPM-8240XH-7.0-1.0 EDS-H-50xLL or ERWS-50xLL-0-PH2-15C ERWS-50xLL-0-T25-15C 82 5,30 1,00 ø7,00 DR 40	
DVP-EFB-51NS or EPM-B-51N-5.4-0.84 EDS-H-50xLL or ERWS-50xLL-0-PH2-15C ERWS-50xLL-0-T25-15C 3,05 ø5,40 0,84 DR ø51	
Eurofast Flat Roof Fasteners	Annex J.20 of European Technical Assessment ETA-23/0651
EDS-H-50xLL (ERWS-50xLL-0-PH2-15C) ERWS-50xLL-0-T25-15C	


DVP-EF-51N or EPM-51N-6,7-0,84


EDS-H-50xLL or
ERWS-50xLL-0-PH2-15C




ERWS-50xLL-0-T25-15C

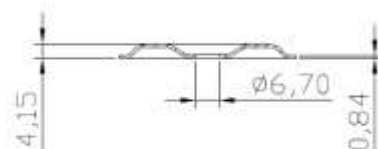



OR



EPM-51N-5,6-0,84


EDS-H-50xLL or
ERWS-50xLL-0-PH2-15C


ERWS-50xLL-0-T25-15C


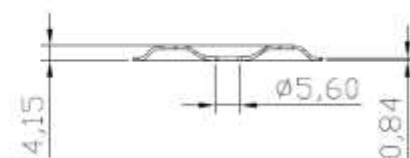


Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.21

of European
Technical Assessment
ETA-23/0651

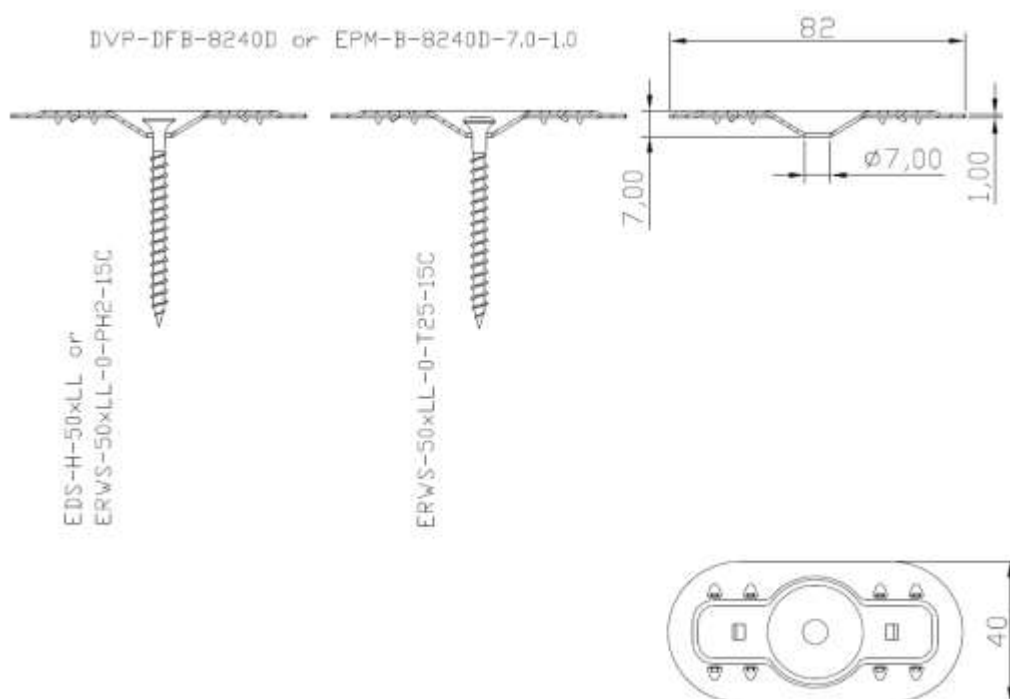
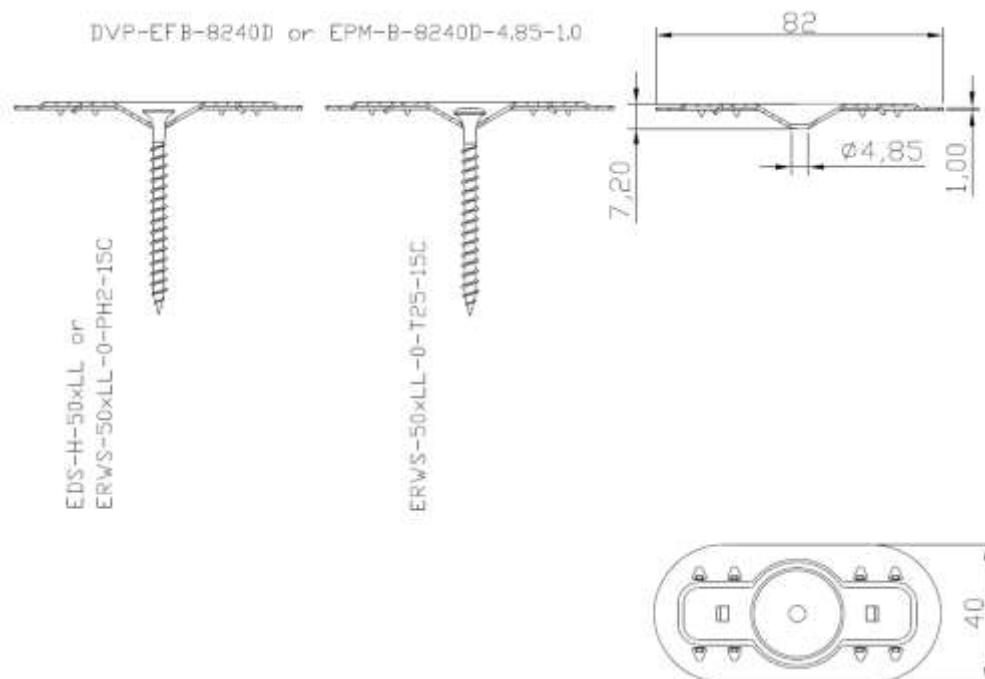


Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.22

of European
Technical Assessment
ETA-23/0651

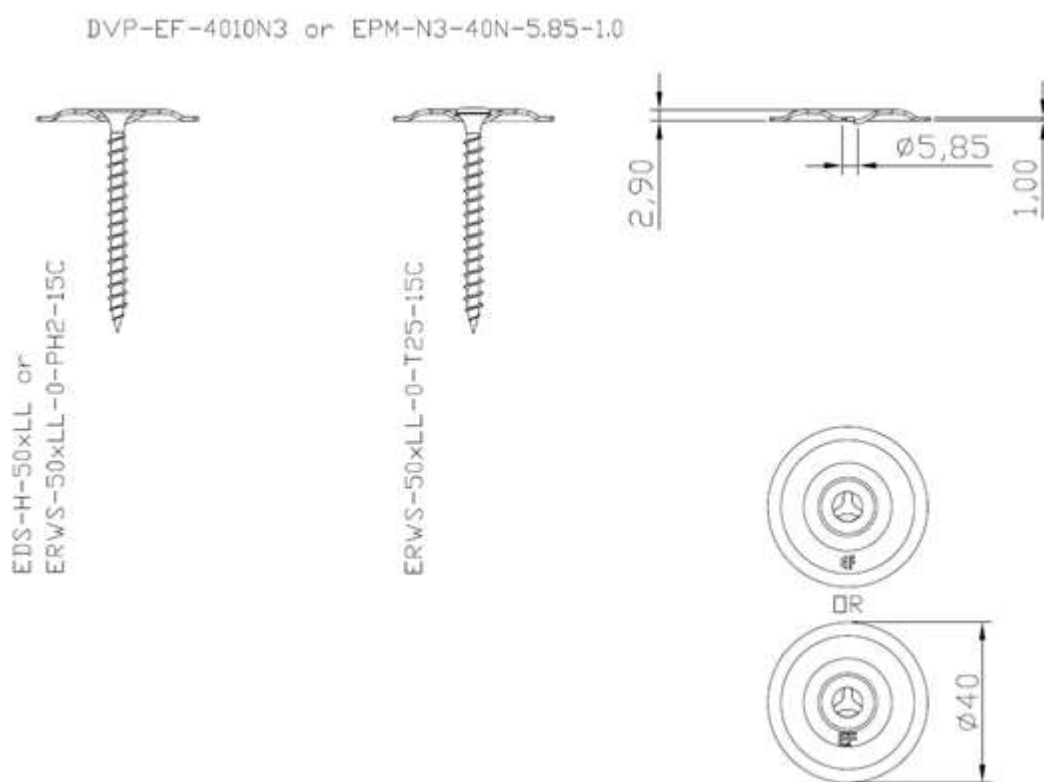
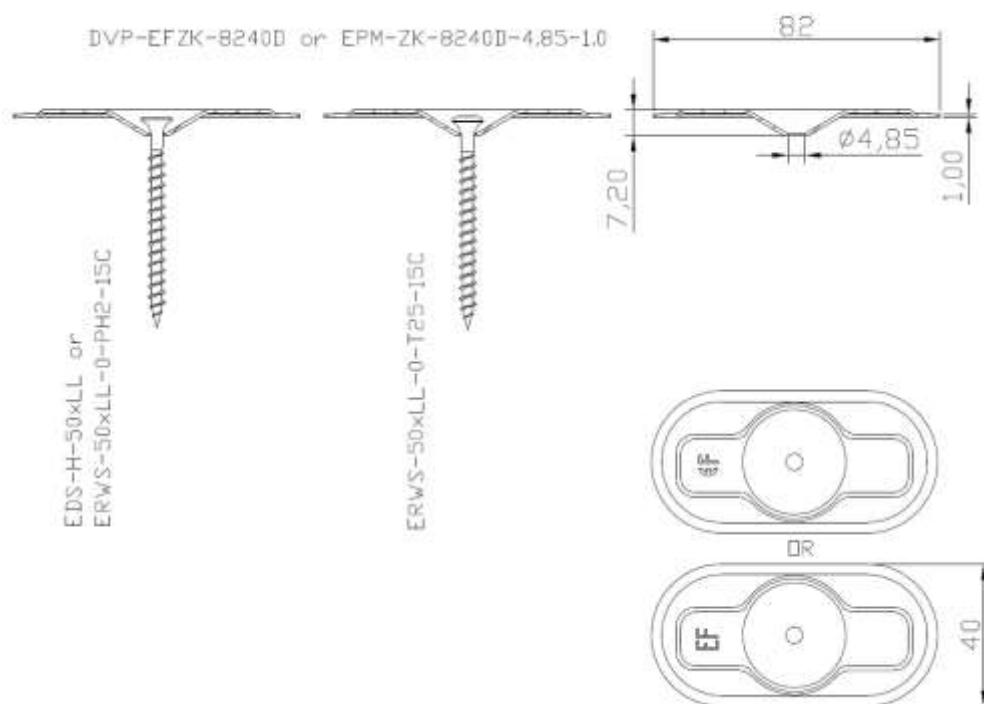


Eurofast Flat Roof Fasteners



EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C



Annex J.23

of European
Technical Assessment
ETA-23/0651





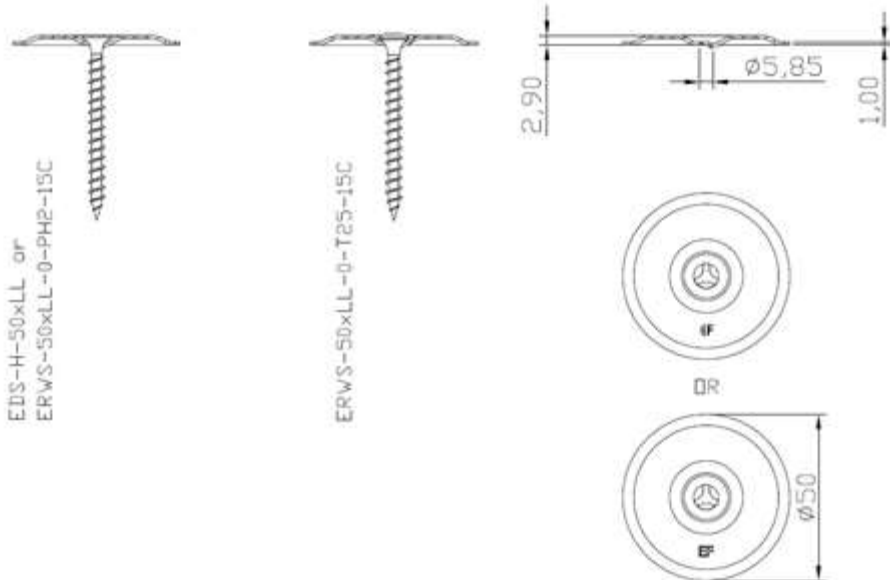
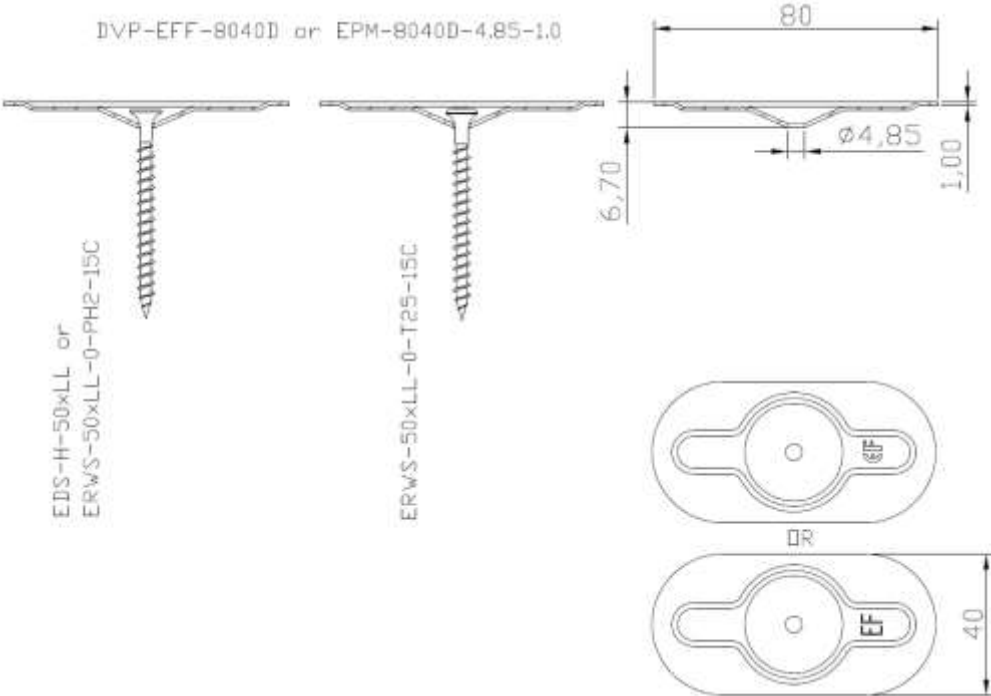
DVP-EF-5010N3 or EPM-N3-50N-5.85-1.0 	
DVP-EFF-8040D or EPM-8040D-4.85-1.0 	
Eurofast Flat Roof Fasteners	Annex J.24 of European Technical Assessment ETA-23/0651
EDS-H-50xLL (ERWS-50xLL-0-PH2-15C) ERWS-50xLL-0-T25-15C	


EPM-T-1P-80-13,6-0,8 + KMT-15xLL or EPM-T-1P-80-13,6-0,8 + EPT-15xLL-PA EDS-H-50xLL or ERWS-50xLL-0-PH2-15C ERWS-50xLL-0-T25-15C	
EPM-1P-80-6,8-0,8 EDS-H-50xLL or ERWS-50xLL-0-PH2-15C ERWS-50xLL-0-T25-15C	
Eurofast Flat Roof Fasteners	Annex J.25
EDS-H-50xLL (ERWS-50xLL-0-PH2-15C) ERWS-50xLL-0-T25-15C	of European Technical Assessment ETA-23/0651

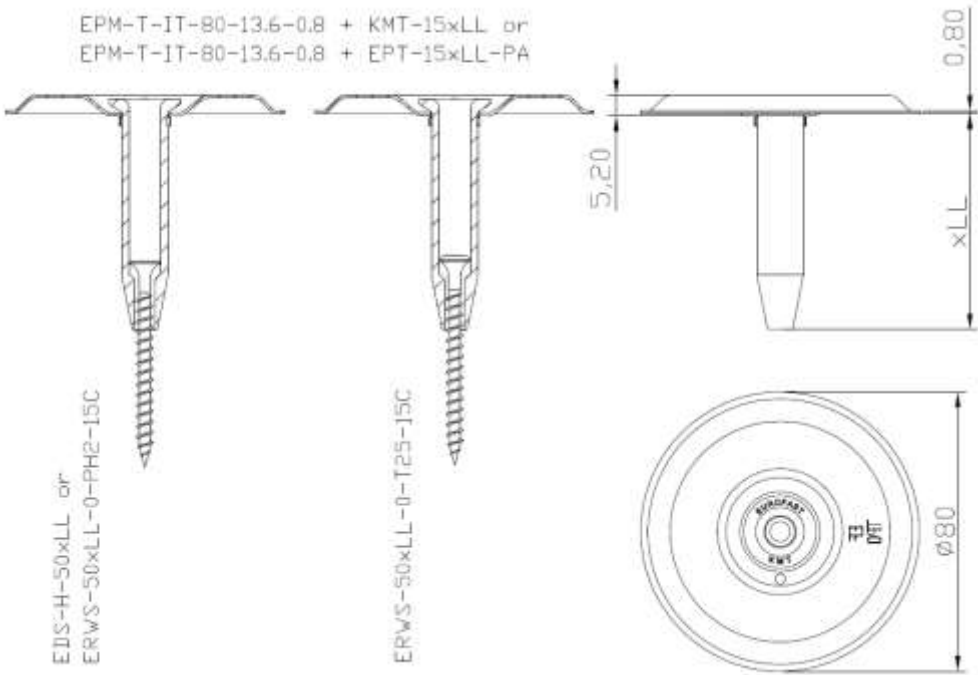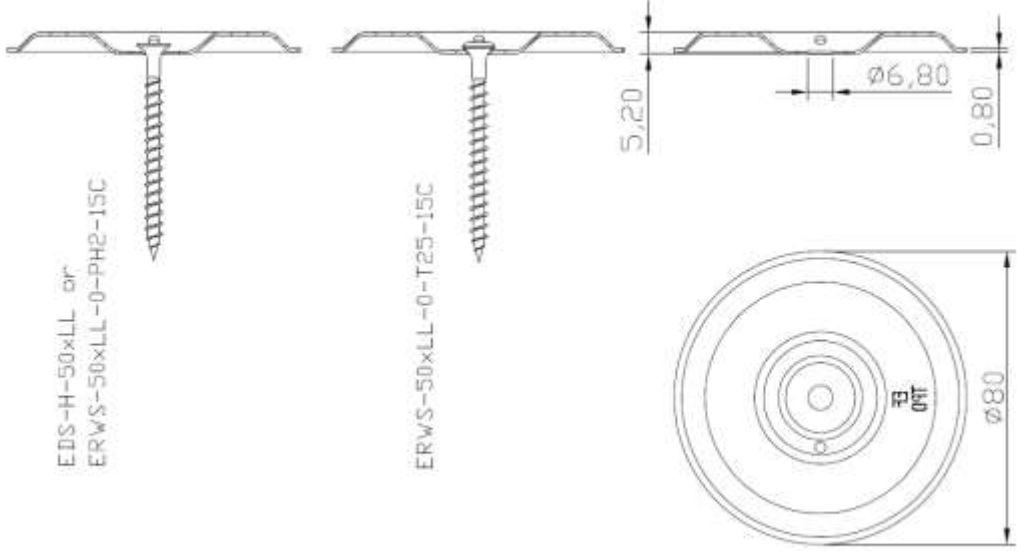EPM-T-IT-80-13.6-0.8 + KMT-15xLL or EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA  EDS-H-50xLL or ERWS-50xLL-0-PH2-15C ERWS-50xLL-0-T25-15C	
EPM-IT-80-6.8-0.8  EDS-H-50xLL or ERWS-50xLL-0-PH2-15C ERWS-50xLL-0-T25-15C	
Eurofast Flat Roof Fasteners EDS-H-50xLL (ERWS-50xLL-0-PH2-15C) ERWS-50xLL-0-T25-15C	Annex J.26 of European Technical Assessment ETA-23/0651

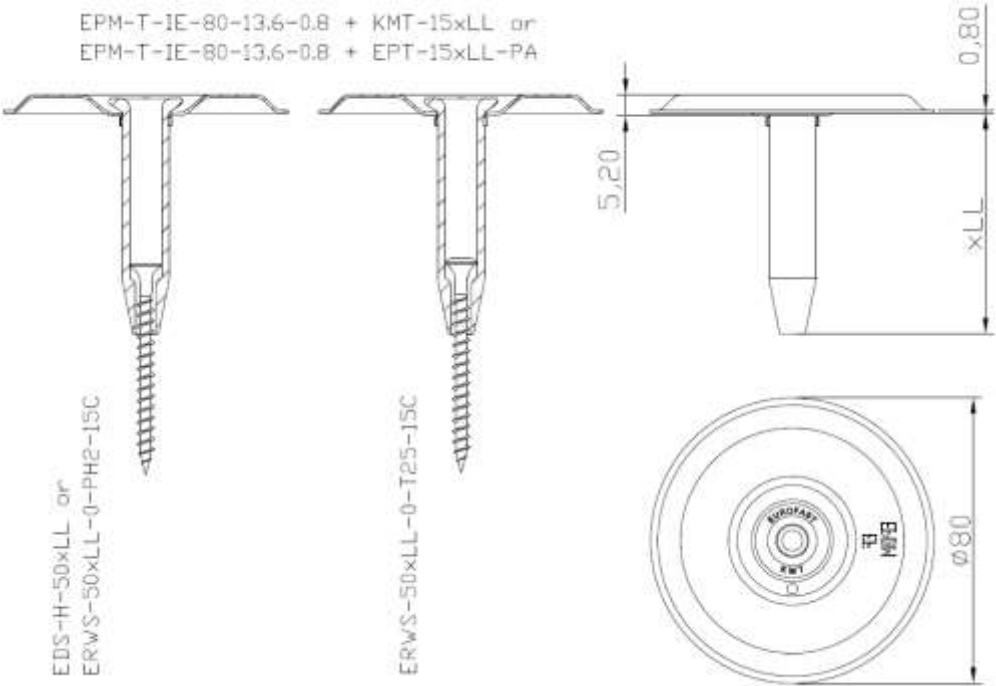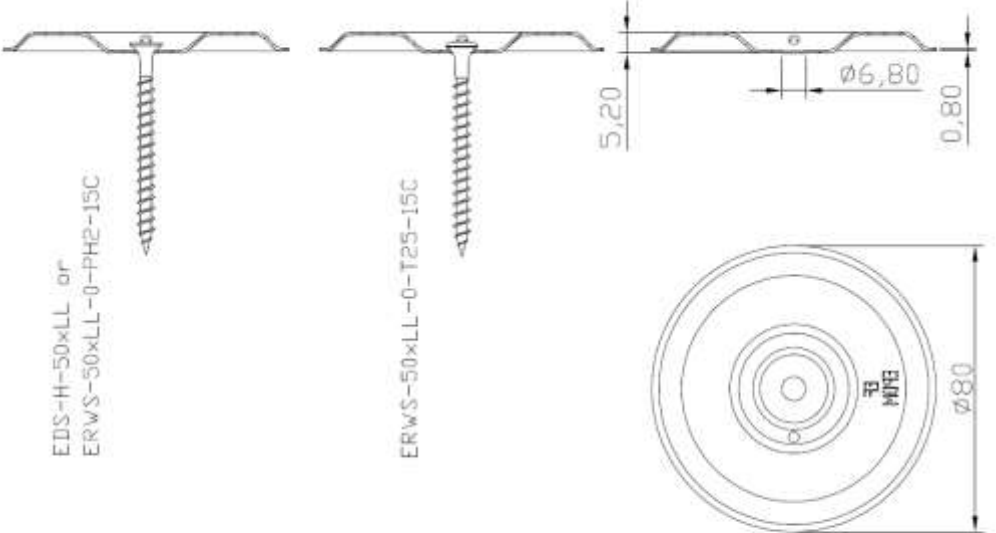EPM-T-IE-80-13,6-0,8 + KMT-15xLL or EPM-T-IE-80-13,6-0,8 + EPT-15xLL-PA  EDS-H-50xLL or ERWS-50xLL-0-PH2-15C ERWS-50xLL-0-T25-15C	
EPM-IE-80-6,8-0,8  EDS-H-50xLL or ERWS-50xLL-0-PH2-15C ERWS-50xLL-0-T25-15C	
Eurofast Flat Roof Fasteners	Annex J.27 of European Technical Assessment ETA-23/0651

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

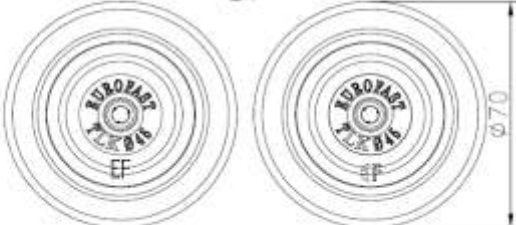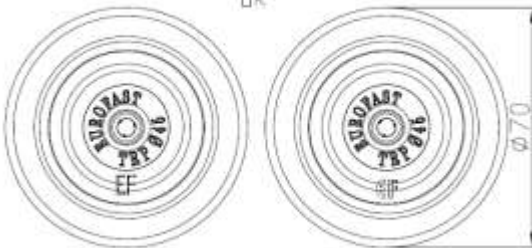DVP-DL-70N + TLK-45xLL or EPM-EDL-70N-20-0.5 + EPT-45xLL-PP  EDS-H-50xLL or ERWS-50xLL-0-PH2-15C  ERWS-50xLL-0-T25-15C  OR 	
DVP-DL-70N + TRP-45xLL or EPM-EDL-70N-20-0.5 + EPT-45xLL-PA  EDS-H-50xLL or ERWS-50xLL-0-PH2-15C  ERWS-50xLL-0-T25-15C  OR 	
Eurofast Flat Roof Fasteners EDS-H-50xLL (ERWS-50xLL-0-PH2-15C) ERWS-50xLL-0-T25-15C	Annex J.28 of European Technical Assessment ETA-23/0651

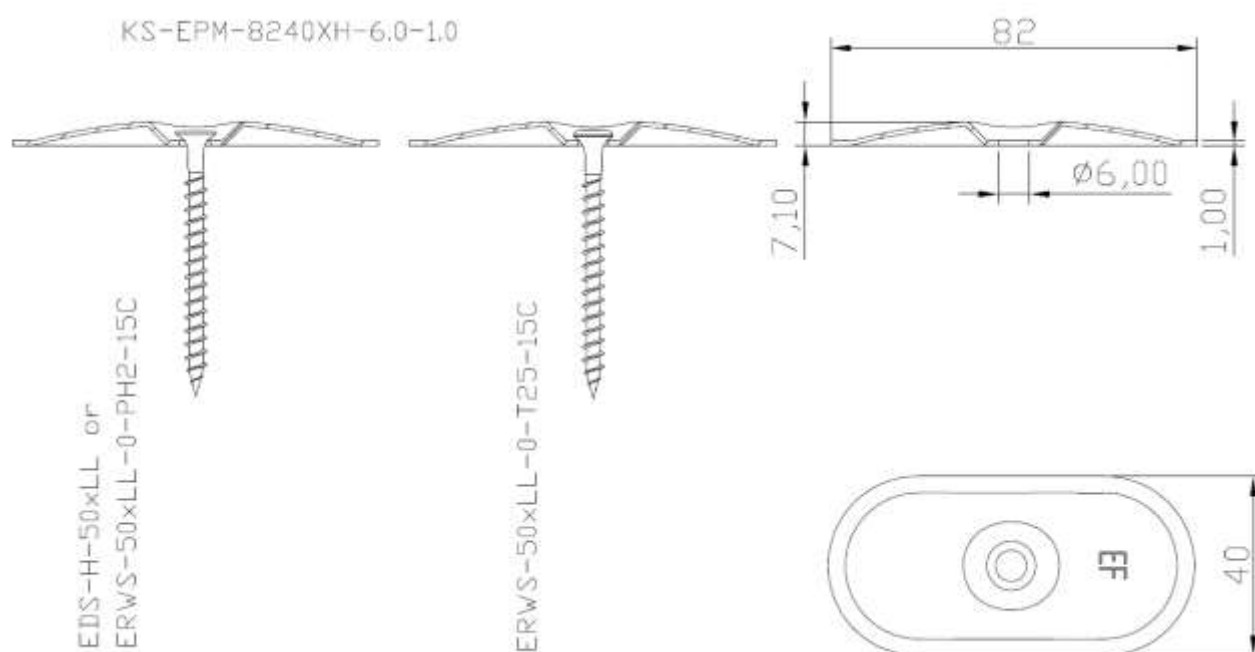


Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.29
of European
Technical Assessment
ETA-23/0651


EBS-xxxxx-25-7.1-1.25 or
BC-EBS-xxxxx-25-7.1-1.25

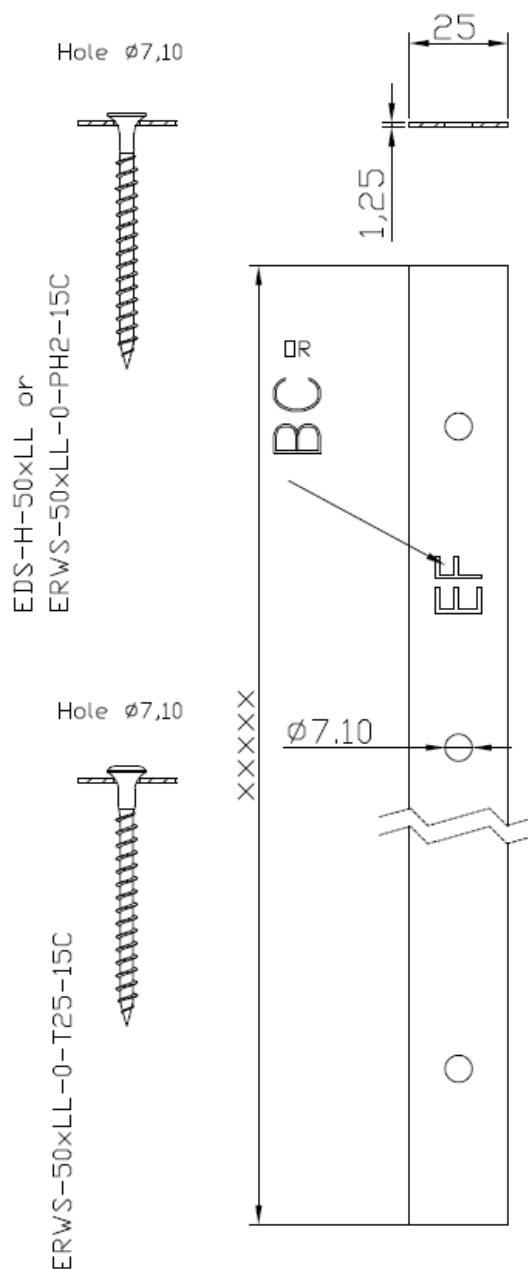

Eurofast Flat Roof Fasteners

EDS-H-50xLL (ERWS-50xLL-0-PH2-15C)
ERWS-50xLL-0-T25-15C

Annex J.30
of European
Technical Assessment
ETA-23/0651

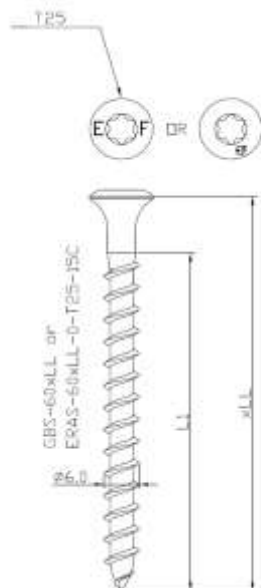

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)				
	Autoclaved aerated concrete AAC 600 kg/m ³	Concrete C12/15 (drill 5,0 mm)	Concrete C20/25 (drill 5,0 mm)	Concrete C25/30 (drill 5,0 mm)
GBS-60xLL (ERAS-60xLL-O-T25-15C)	1,37	1,42	1,83	2,00

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)								
	OSB/3				Chipboard	Plywood		Timber C24
t [mm]	16	18	21	25	19	18	21	24
GBS-60xLL (ERAS-60xLL-O-T25-15C)	1,08	1,26	1,50	1,43	1,51	1,34	1,46	1,95

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)		
	DVP-EF-51N (EPM-51N-6.7-0.84)	EPM-IP-80-6.8-0.8
	-	EPM-IT-80-6.8-0.8
	-	EPM-IE-80-6.8-0.8
GBS-60xLL (ERAS-60xLL-O-T25-15C)	2,93	2,92

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

GBS-60xLL (ERAS-60xLL-O-T25-15C)

Annex K.1
of European
Technical Assessment
ETA-23/0651

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	-	TLK-45xLL (EPT-45xLL-PP)	HTLK-45xLL (EPT-O-45xLL-PP)
	TRP-45xLL (EPT-45xLL-PA)	TLK-75xLL (EPT-75xLL-PP)	-
	BTRP-45xLL (EPT-B-45xLL-PA)	DVP-DL-70N + TLK-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)	-
	TWP-8040xLL (EPT-8040xLL-PA)	-	-
	EDF-BAR F-TUBE + KMT-15xLL (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)	-	-
	DVP-KMT-8240 + KMT-15xLL (EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)	-	-
	EPM-T-IP-80-13.6-0.8 + KMT-15xLL (EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IT-80-13.6-0.8 + KMT-15xLL (EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IE-80-13.6-0.8 + KMT-15xLL (EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	DVP-DL-70N + TRP-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)	-	-
GBS-60xLL (ERAS-60xLL-0-T25-15C)	2,64	1,68	1,78

* "Pull-over" according to CEN/TS 17659:2021

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)					
	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)	DVP-EF-4010N (EPM-40N-6.0-1.0)	DVP-EF-5010D (EPM-50D-6.3-1.0)	DVP-DF-7070D (EPM-7070D-7.0-1.0)	DVP-EF-7007D (EPM-70D-6.0-0.7)
	DVP-EF-7010D (EPM-70D-6.5-1.0)	KS-EPM-8240XH-6.0-1.0	DVP-EF-5010N (EPM-50N-6.3-1.0)	DVP-DF-8240D (EPM-8240D-7.0-1.0)	DVP-EF-7007H (EPM-70H-6.0-0.7)
	DVP-EF-7010N (EPM-70N-6.5-1.0)	-	-	DVP-DF-8240H (EPM-8240H-7.0-1.0)	DVP-EF-7007N (EPM-70N-6.0-0.7)
	DVP-EF-8040D (EPM-8040D-6.5-1.0)	-	-	DVP-DF-8240XH (EPM-8240XH-7.0-1.0)	-
	DVP-EF-8040N (EPM-8040N-6.5-1.0)	-	-	DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)	-
	-	-	-	EBS-xxxxx-25-7.1-1.25 (BC-EBS-xxxxx-25-7.1-1.25)	-
GBS-60xLL (ERAS-60xLL-0-T25-15C)	5,05	4,43	3,89	2,96	2,91

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

GBS-60xLL (ERAS-60xLL-0-T25-15C)

Annex K.2
of European
Technical Assessment
ETA-23/0651


Screw:			
GBS-60xLL	(ERAS-60xLL-0-T25-15C)		
Metal pressure plate:			
DVP-EF-4010N	(EPM-40N-6.0-1.0)	DVP-DF-8240XH	(EPM-8240XH-7.0-1.0)
DVP-EF-5010D	(EPM-50D-6.3-1.0)	DVP-EF-51N	(EPM-51N-6.7-0.84)
DVP-EF-5010N	(EPM-50N-6.3-1.0)	DVP-DFB-8240D	(EPM-B-8240D-7.0-1.0)
DVP-DF-7070D	(EPM-7070D-7.0-1.0)	EPM-IP-80-6.8-0.8	
DVP-EF-7007D	(EPM-70D-6.0-0.7)	EPM-IT-80-6.8-0.8	
DVP-EF-7010D	(EPM-70D-6.5-1.0)	EPM-IE-80-6.8-0.8	
DVP-EF-7007H	(EPM-70H-6.0-0.7)	DVP-KMT-8240 + KMT-15xLL	(EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)
DVP-EF-7007N	(EPM-70N-6.0-0.7)	EPM-T-IP-80-13.6-0.8 + KMT-15xLL	(EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-7010N	(EPM-70N-6.5-1.0)	EPM-T-IT-80-13.6-0.8 + KMT-15xLL	(EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8040D	(EPM-8040D-6.5-1.0)	EPM-T-IE-80-13.6-0.8 + KMT-15xLL	(EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8040N	(EPM-8040N-6.5-1.0)	DVP-DL-70N + TRP-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)
DVP-DF-8240D	(EPM-8240D-7.0-1.0)	DVP-DL-70N + TLK-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)
DVP-DF-8240H	(EPM-8240H-7.0-1.0)	KS-EPM-8240XH-6.0-1.0	
Pressure plate with tube:		Termination bar:	
TRP-45xLL	(EPT-45xLL-PA)	EDF-BAR F-TUBE	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)
BTRP-45xLL	(EPT-B-45xLL-PA)	EDF-BAR F-TUBE + KMT-15xLL	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)
TWP-8040xLL	(EPT-8040xLL-PA)	EBS-xxxxx-25-7.1-1.25	(BC-EBS-xxxxx-25-7.1-1.25)
TLK-45xLL	(EPT-45xLL-PP)		
HTLK-45xLL	(EPT-O-45xLL-PP)		
TLK-75xLL	(EPT-75xLL-PP)		
Substrate:			
Autoclaved aerated concrete	AAC 600 kg/m ³	EN 12602	
Concrete	C12/15, C20/25, C25/30	EN 206	
OSB/3	$\rho_{min} = 550 \text{ kg/m}^3$	EN 12369-1	
Chipboard	$\rho_{min} = 600 \text{ kg/m}^3$	EN 12369-1	
Plywood	$\rho_{min} = 400 \text{ kg/m}^3$	EN 12369-2	
Timber, class $\geq$ C24	$\rho_{min} = 350 \text{ kg/m}^3$	EN 338	
Installation data:			
Head type:		Raised Bugle Head	
Recess:		TX25	
Effective anchoring depth on autoclaved aerated concrete substrate h_{ef} :		$\geq 60 \text{ mm}$	
Effective anchoring depth on concrete substrate h_{ef} :		$\geq 30 \text{ mm}$	
Concrete drill diameter:		5,0 mm	
Drilled hole depth in concrete:		$h_{ef} + 10 \text{ mm}$	
Fixing in wooden and wood-based substrate:		Full thread through the substrate or minimum embedment depth	
Installation force of installation tool in autoclaved aerated concrete substrate:		15 kg	
Installation tool speed in autoclaved aerated concrete substrate:		1000 rpm	
Installation force of installation tool in concrete substrate:		15 kg + impact	
Installation tool speed in concrete substrate:		100 rpm	
Installation force of installation tool in wooden and wood-based substrate:		30 kg	
Installation tool speed in wooden and wood-based substrate:		2000 - 2500 rpm	

Eurofast Flat Roof Fasteners

GBS-60xLL (ERAS-60xLL-0-T25-15C)

Annex K.3



of European
Technical Assessment
ETA-23/0651

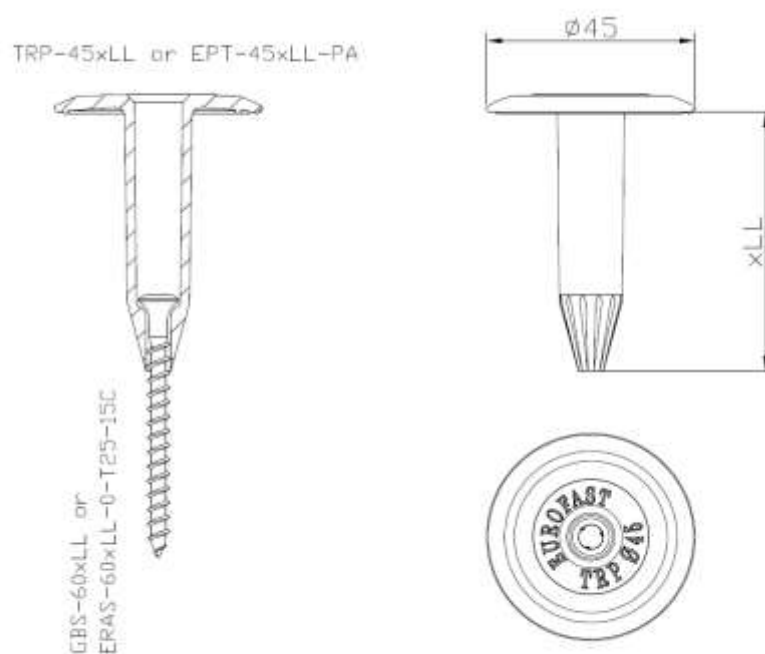


Eurofast Flat Roof Fasteners

GBS-60xLL (ERAS-60xLL-0-T25-15C)


Annex K.4
of European
Technical Assessment
ETA-23/0651

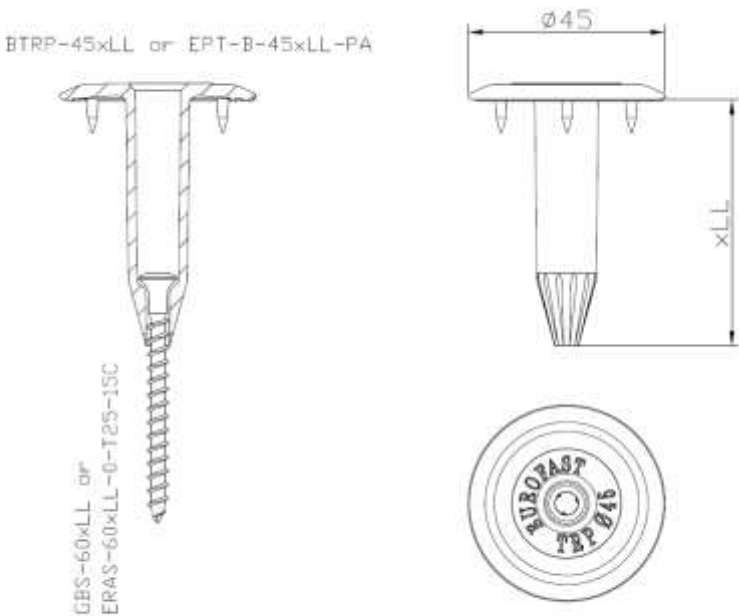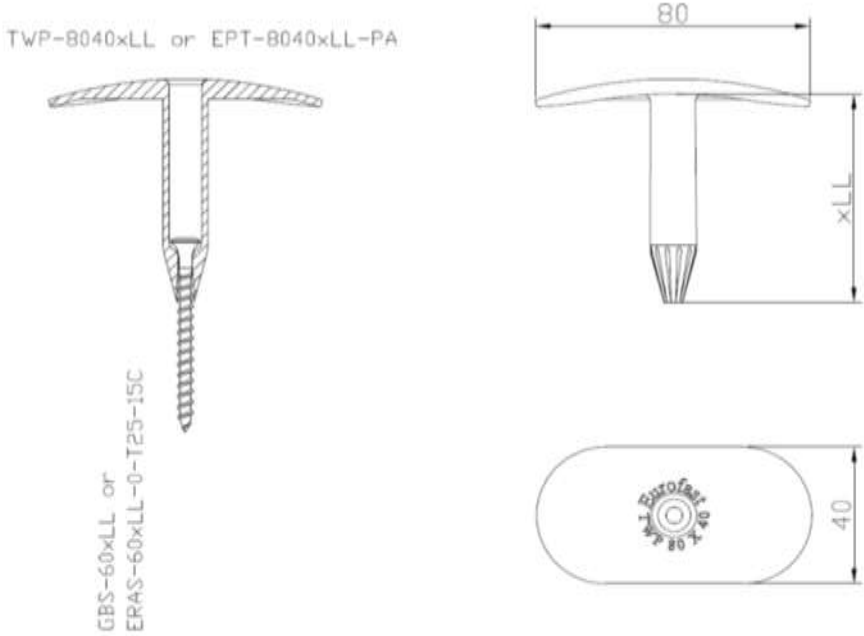BTRP-45xLL or EPT-B-45xLL-PA 	
TWP-8040xLL or EPT-B040xLL-PA 	
Eurofast Flat Roof Fasteners	Annex K.5 of European Technical Assessment ETA-23/0651
GBS-60xLL (ERAS-60xLL-0-T25-15C)	

EDF-BAR-F-TUBE + KMT-15xLL or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0
+ EPT-15xLL-PA

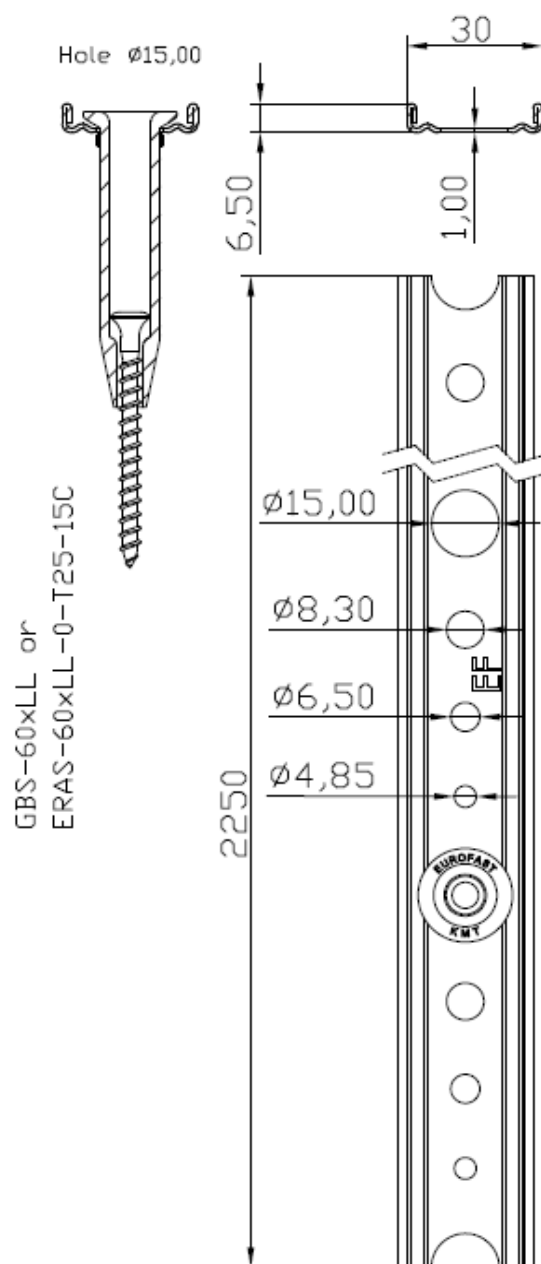

EDF-BAR-F-TUBE or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0


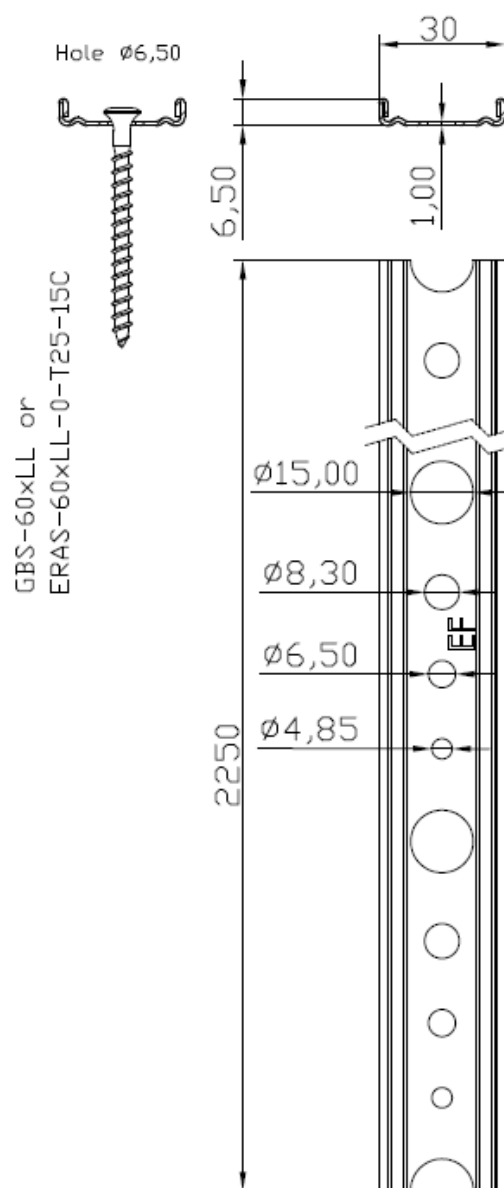


Eurofast Flat Roof Fasteners


GBS-60xLL (ERAS-60xLL-0-T25-15C)

Annex K.6




of European
Technical Assessment
ETA-23/0651

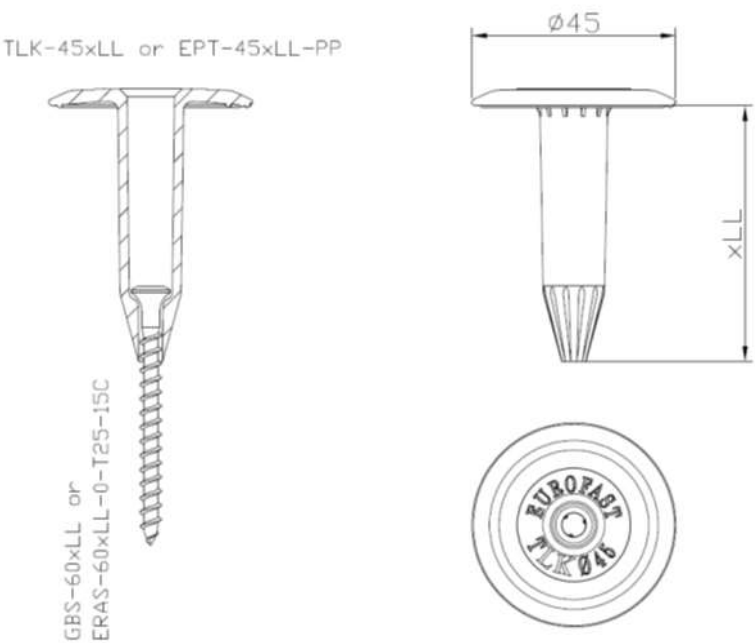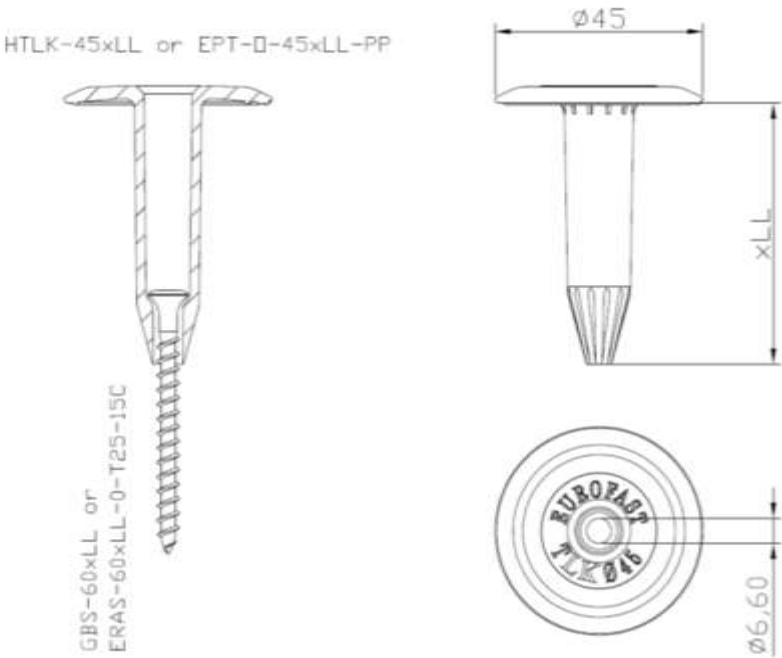TLK-45xLL or EPT-45xLL-PP  GBS-60xLL or ERAS-60xLL-0-T25-15C	
HTLK-45xLL or EPT-D-45xLL-PP  GBS-60xLL or ERAS-60xLL-0-T25-15C	
Eurofast Flat Roof Fasteners GBS-60xLL (ERAS-60xLL-0-T25-15C)	Annex K.7 of European Technical Assessment ETA-23/0651

TLK-75xLL or EPT-75xLL-PP

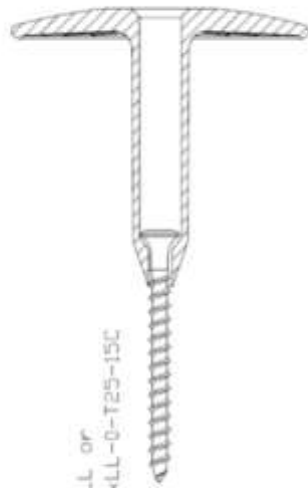GBS-60xLL or
ERAS-60xLL-0-T25-15C



DVP-EF-4010N or EPM-40N-6.0-1.0

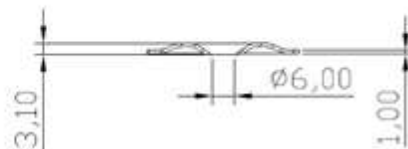GBS-60xLL or
ERAS-60xLL-0-T25-15C**Eurofast Flat Roof Fasteners**


GBS-60xLL (ERAS-60xLL-0-T25-15C)

Annex K.8
of European
Technical Assessment
ETA-23/0651


DVP-EF-5010D or EPM-50D-6.3-1.0

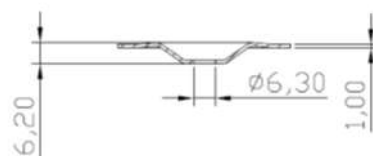
GBS-60xLL or
ERAS-60xLL-0-T25-15C



OR



DVP-EF-5010N or EPM-50N-6.3-1.0


GBS-60xLL or
ERAS-60xLL-0-T25-15C


OR





Eurofast Flat Roof Fasteners

GBS-60xLL (ERAS-60xLL-0-T25-15C)



Annex K.9

of European
Technical Assessment
ETA-23/0651

DVP-DF-7070D or EPM-7070D-7.0-1.0

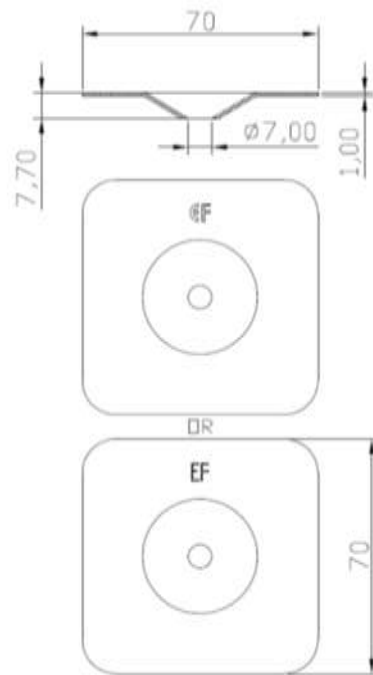GBS-60xLL or
ERAS-60xLL-0-T25-15C



DVP-EF-7007D or EPM-7007D-6.0-0.7

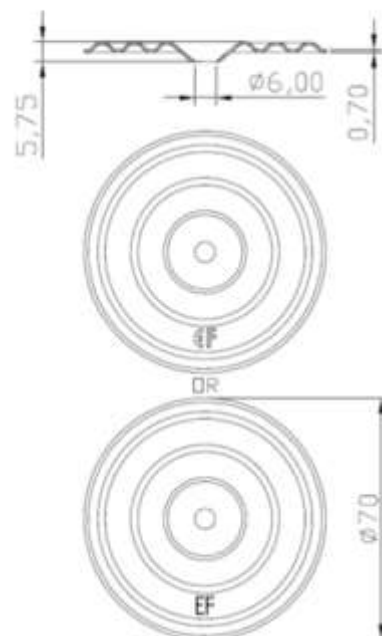GBS-60xLL or
ERAS-60xLL-0-T25-15C



Eurofast Flat Roof Fasteners

GBS-60xLL (ERAS-60xLL-0-T25-15C)


Annex K.10
of European
Technical Assessment
ETA-23/0651

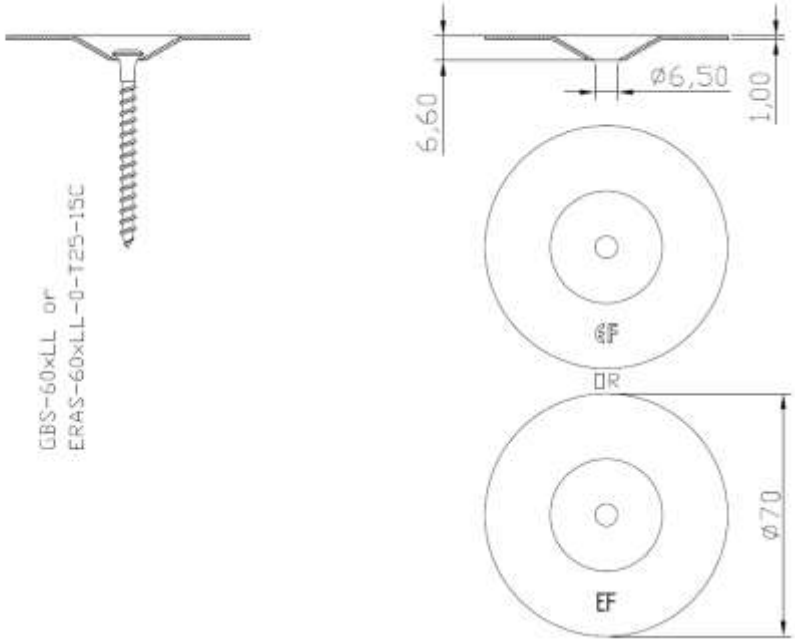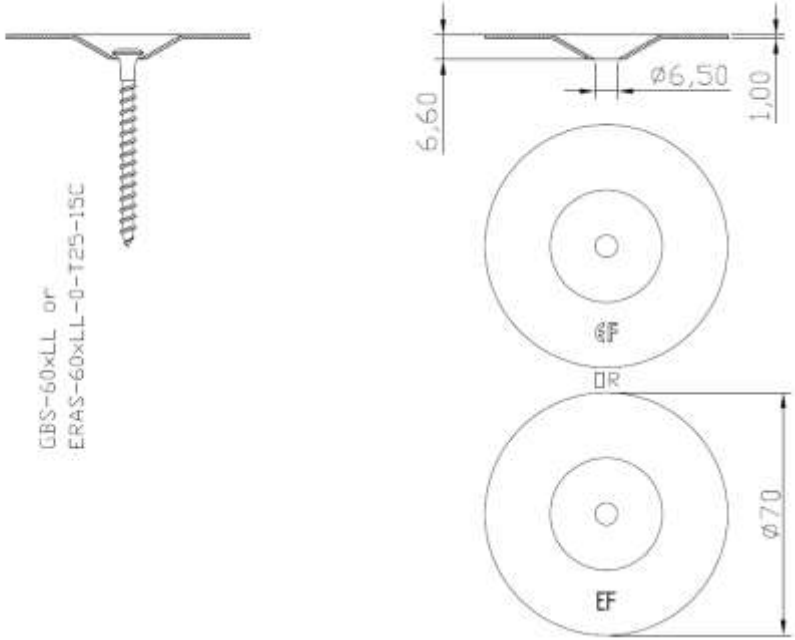DVP-EF-7010D or EPM-70D-6,5-1,0 	
DVP-EF-7010D or EPM-70D-6,5-1,0 	
Eurofast Flat Roof Fasteners	Annex K.11 of European Technical Assessment ETA-23/0651
GBS-60xLL (ERAS-60xLL-0-T25-15C)	

DVP-EF-7007N or EPM-70N-6.0-0.7

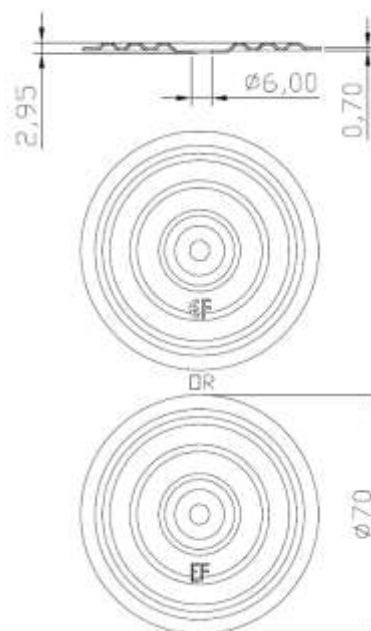GBS-60xLL or
ERAS-60xLL-0-T25-15C

DVP-EF-7010N or EPM-70N-6.5-1.0


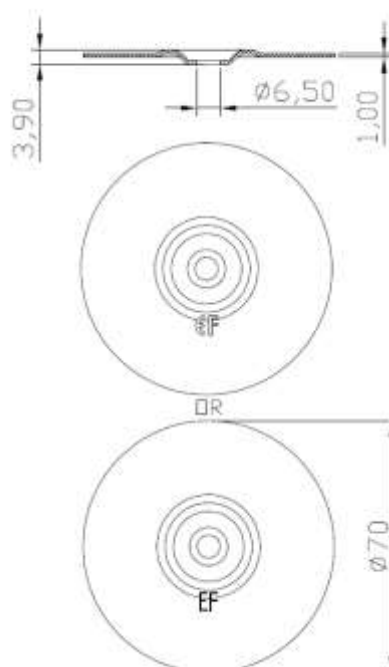
GBS-60xLL or
ERAS-60xLL-0-T25-15C

Eurofast Flat Roof Fasteners

GBS-60xLL (ERAS-60xLL-0-T25-15C)

Annex K.12
of European
Technical Assessment
ETA-23/0651




DVP-EF-8040D or EPM-8040D-6,5-1,0

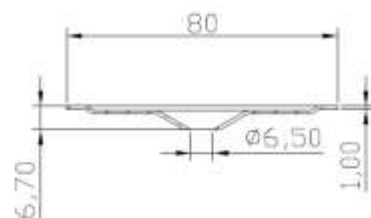
GBS-60xLL or
ERAS-60xLL-0-T25-15C



DR



DVP-EF-8040N or EPM-8040N-6,5-1,0

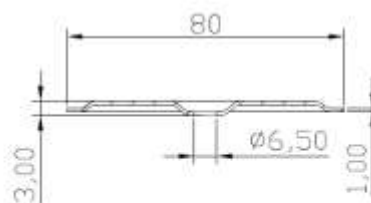
GBS-60xLL or
ERAS-60xLL-0-T25-15C


DR






Eurofast Flat Roof Fasteners

GBS-60xLL (ERAS-60xLL-0-T25-15C)

Annex K.13
of European
Technical Assessment
ETA-23/0651



DVP-DF-8240D or EPM-8240D-7.00-1.0

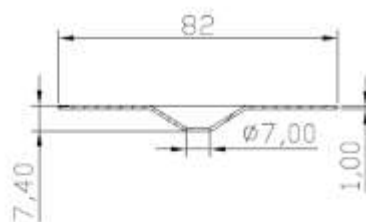GBS-60xLL or
ERAS-60xLL-0-T25-15C

DR



DVP-DF-8240H or EPM-8240H-7.0-1.0

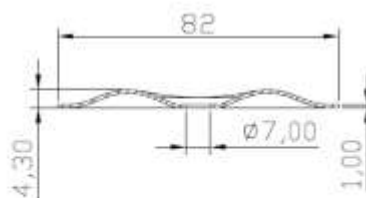GBS-60xLL or
ERAS-60xLL-0-T25-15C


DR

**Eurofast Flat Roof Fasteners**



GBS-60xLL (ERAS-60xLL-0-T25-15C)

Annex K.14
of European
Technical Assessment
ETA-23/0651

DVP-KMT-8240 + KMT-15xLL or
EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA

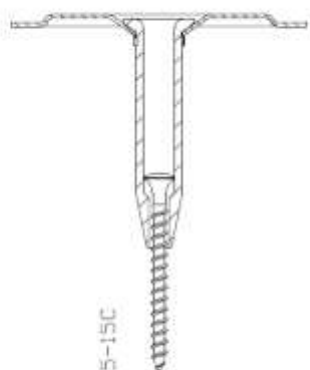



GBS-60xLL or
ERAS-60xLL-0-T25-15C

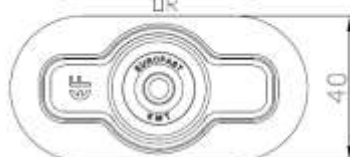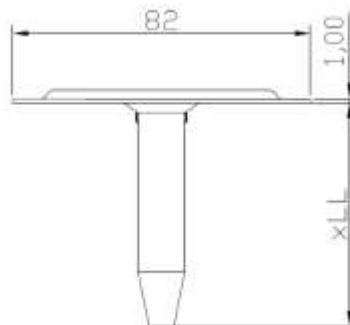

DVP-DF-8240XH or EPM-8240XH-7.0-1.0



GBS-60xLL or
ERAS-60xLL-0-T25-15C



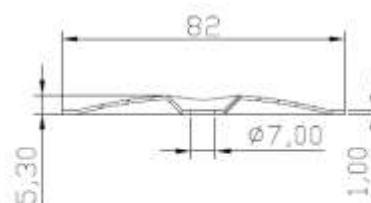


Eurofast Flat Roof Fasteners




GBS-60xLL (ERAS-60xLL-0-T25-15C)

Annex K.15
of European
Technical Assessment
ETA-23/0651

DVP-EF-51N or EPM-51N-6,7-0.84

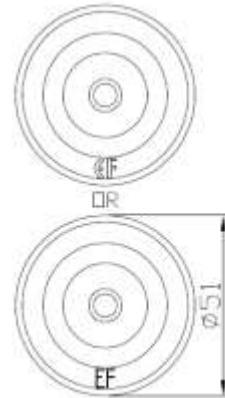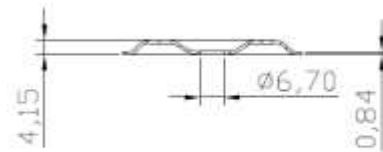GBS-60xLL or
ERAS-60xLL-0-T25-15C

DVP-DFB-8240D or EPM-B-8240D-7,0-1,0

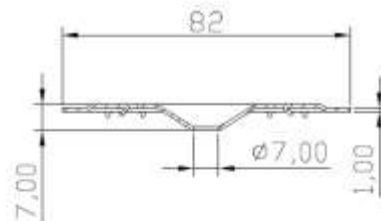
GBS-60xLL or
ERAS-60xLL-0-T25-15C

Eurofast Flat Roof Fasteners


GBS-60xLL (ERAS-60xLL-0-T25-15C)

Annex K.16
of European
Technical Assessment
ETA-23/0651


EPM-T-IP-80-13,6-0,8 + KMT-15xLL or
EPM-T-IP-80-13,6-0,8 + EPT-15xLL-PA

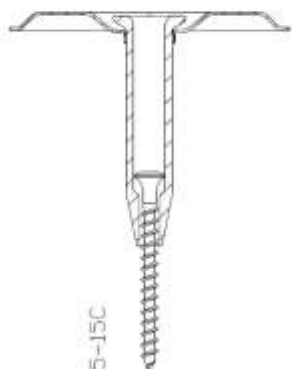



GBS-60xLL or
ERAS-60xLL-0-T25-15C



EPM-IP-80-6,8-0,8








GBS-60xLL or
ERAS-60xLL-0-T25-15C

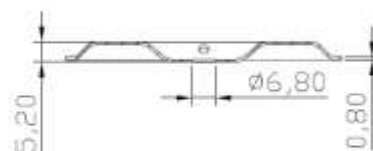


Eurofast Flat Roof Fasteners

GBS-60xLL (ERAS-60xLL-0-T25-15C)



Annex K.17
of European
Technical Assessment
ETA-23/0651

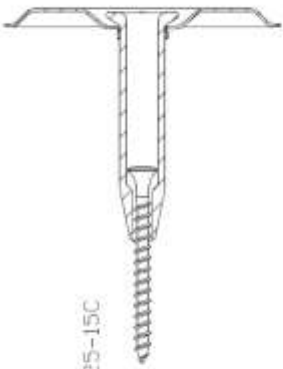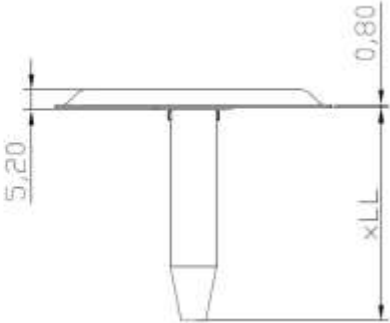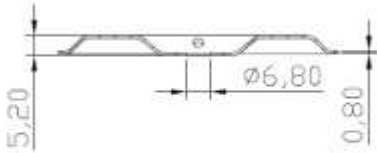EPM-T-IT-80-13,6-0,8 + KMT-15xLL or EPM-T-IT-80-13,6-0,8 + EPT-15xLL-PA  GBS-60xLL or ERAS-60xLL-0-T25-15C 	
EPM-IT-80-6,8-0,8  GBS-60xLL or ERAS-60xLL-0-T25-15C 	
Eurofast Flat Roof Fasteners	Annex K.18 of European Technical Assessment ETA-23/0651
GBS-60xLL (ERAS-60xLL-0-T25-15C)	


EPM-T-IE-80-13,6-0,8 + KMT-15xLL or
EPM-T-IE-80-13,6-0,8 + EPT-15xLL-PA

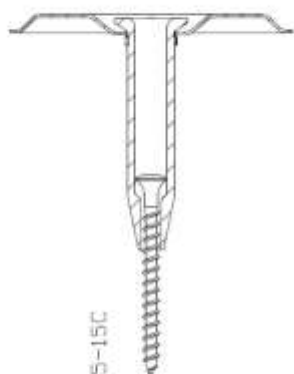



GBS-60xLL or
ERAS-60xLL-0-T25-15C

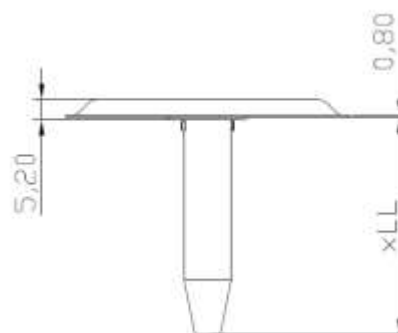

EPM-IE-80-6,8-0,8



GBS-60xLL or
ERAS-60xLL-0-T25-15C

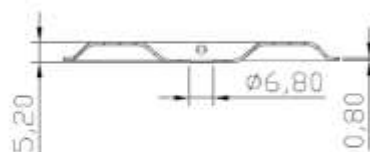


Eurofast Flat Roof Fasteners

GBS-60xLL (ERAS-60xLL-0-T25-15C)



Annex K.19

of European
Technical Assessment
ETA-23/0651


DVP-DL-70N + TLK-45xLL or
EPM-EDL-70N-20-0.5 + EPT-45xLL-PP

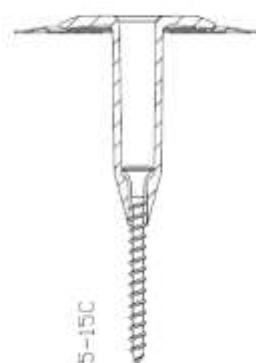


GBS-60xLL or
ERAS-60xLL-0-T25-15C

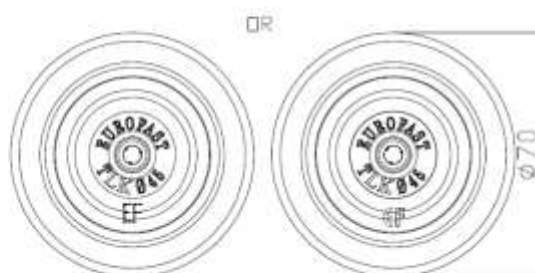

DVP-DL-70N + TRP-45xLL or
EPM-EDL-70N-20-0.5 + EPT-45xLL-PA



GBS-60xLL or
ERAS-60xLL-0-T25-15C


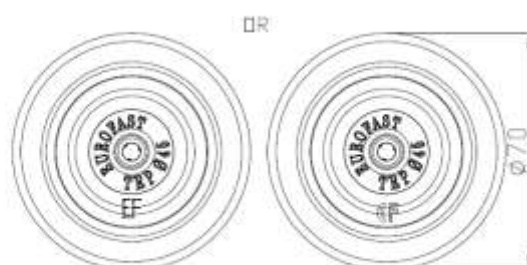


Eurofast Flat Roof Fasteners

GBS-60xLL (ERAS-60xLL-0-T25-15C)

Annex K.20
of European
Technical Assessment
ETA-23/0651

KS-EPM-8240XH-6.0-1.0

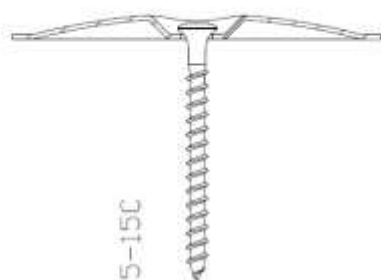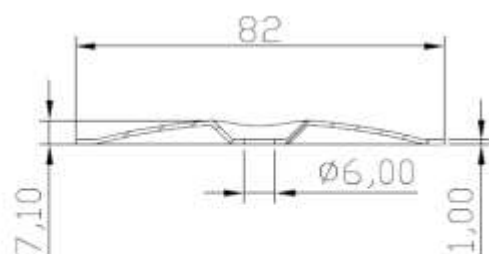

GBS-60xLL or
ERAS-60xLL-0-T25-15C


Eurofast Flat Roof Fasteners

GBS-60xLL (ERAS-60xLL-0-T25-15C)

Annex K.21
of European
Technical Assessment
ETA-23/0651


EBS-xxxxx-25-7.1-1.25 or
BC-EBS-xxxxx-25-7.1-1.25

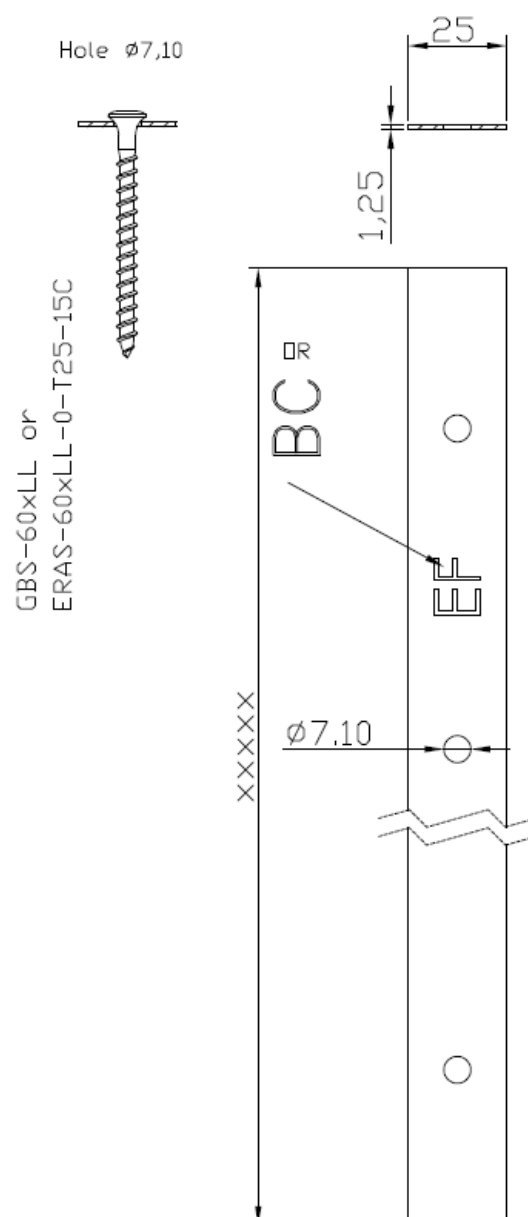

Eurofast Flat Roof Fasteners

GBS-60xLL (ERAS-60xLL-0-T25-15C)

Annex K.22
of European
Technical Assessment
ETA-23/0651

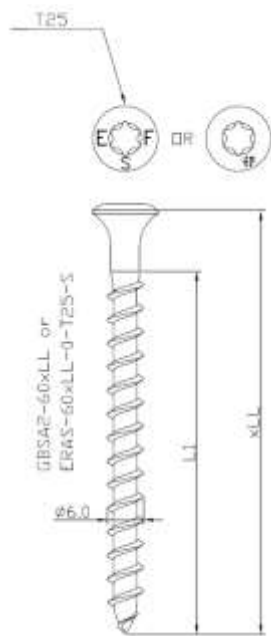

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)

	Autoclaved aerated concrete AAC 600 kg/m ³	OSB/3				Chipboard	Plywood		Timber C24
t [mm]	-	16	18	21	25	19	18	21	24
GBSA2-60xLL (ERAS-60xLL-0-T25-S)	1,37	0,82	1,50	1,51	1,57	1,53	1,36	1,57	1,60

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)

	DVP-EF-51N (EPM-51N-6.7-0.84)	EPM-IP-80-6.8-0.8
	-	EPM-IT-80-6.8-0.8
	-	EPM-IE-80-6.8-0.8
GBSA2-60xLL (ERAS-60xLL-0-T25-S)	2,93	2,92

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

GBSA2-60xLL (ERAS-60xLL-0-T25-S)

Annex L.1

of European
Technical Assessment
ETA-23/0651

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	-	TLK-45xLL (EPT-45xLL-PP)	HTLK-45xLL (EPT-O-45xLL-PP)
	TRP-45xLL (EPT-45xLL-PA)	TLK-75xLL (EPT-75xLL-PP)	-
	BTRP-45xLL (EPT-B-45xLL-PA)	DVP-DL-70N + TLK-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)	-
	TWP-8040xLL (EPT-8040xLL-PA)	-	-
	EDF-BAR F-TUBE + KMT-15xLL (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)	-	-
	DVP-KMT-8240 + KMT-15xLL (EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)	-	-
	EPM-T-IP-80-13.6-0.8 + KMT-15xLL (EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IT-80-13.6-0.8 + KMT-15xLL (EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IE-80-13.6-0.8 + KMT-15xLL (EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	DVP-DL-70N + TRP-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)	-	-
GBSA2-60xLL (ERAS-60xLL-0-T25-S)	2,64	1,68	1,78

* "Pull-over" according to CEN/TS 17659:2021

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)					
	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)	DVP-EF-4010N (EPM-40N-6.0-1.0)	DVP-EF-5010D (EPM-50D-6.3-1.0)	DVP-DF-7070D (EPM-7070D-7.0-1.0)	DVP-EF-7007D (EPM-70D-6.0-0.7)
	DVP-EF-7010D (EPM-70D-6.5-1.0)	KS-EPM-8240XH-6.0-1.0	DVP-EF-5010N (EPM-50N-6.3-1.0)	DVP-DF-8240D (EPM-8240D-7.0-1.0)	DVP-EF-7007H (EPM-70H-6.0-0.7)
	DVP-EF-7010N (EPM-70N-6.5-1.0)	-	-	DVP-DF-8240H (EPM-8240H-7.0-1.0)	DVP-EF-7007N (EPM-70N-6.0-0.7)
	DVP-EF-8040D (EPM-8040D-6.5-1.0)	-	-	DVP-DF-8240XH (EPM-8240XH-7.0-1.0)	-
	DVP-EF-8040N (EPM-8040N-6.5-1.0)	-	-	DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)	-
	-	-	-	EBS-xxxxx-25-7.1-1.25 (BC-EBS-xxxxx-25-7.1-1.25)	-
GBSA2-60xLL (ERAS-60xLL-0-T25-S)	5,05	4,43	3,89	2,96	2,91

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

GBSA2-60xLL (ERAS-60xLL-0-T25-S)

Annex L.2
of European
Technical Assessment
ETA-23/0651

Screw:

GBSA2-60xLL

(ERAS-60xLL-0-T25-S)

Metal pressure plate:

DVP-EF-4010N	(EPM-40N-6.0-1.0)	DVP-DF-8240XH	(EPM-8240XH-7.0-1.0)
DVP-EF-5010D	(EPM-50D-6.3-1.0)	DVP-EF-51N	(EPM-51N-6.7-0.84)
DVP-EF-5010N	(EPM-50N-6.3-1.0)	DVP-DFB-8240D	(EPM-B-8240D-7.0-1.0)
DVP-DF-7070D	(EPM-7070D-7.0-1.0)	EPM-IP-80-6.8-0.8	
DVP-EF-7007D	(EPM-70D-6.0-0.7)	EPM-IT-80-6.8-0.8	
DVP-EF-7010D	(EPM-70D-6.5-1.0)	EPM-IE-80-6.8-0.8	
DVP-EF-7007H	(EPM-70H-6.0-0.7)	DVP-KMT-8240 + KMT-15xLL	(EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)
DVP-EF-7007N	(EPM-70N-6.0-0.7)	EPM-T-IP-80-13.6-0.8 + KMT-15xLL	(EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-7010N	(EPM-70N-6.5-1.0)	EPM-T-IT-80-13.6-0.8 + KMT-15xLL	(EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8040D	(EPM-8040D-6.5-1.0)	EPM-T-IE-80-13.6-0.8 + KMT-15xLL	(EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8040N	(EPM-8040N-6.5-1.0)	DVP-DL-70N + TRP-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)
DVP-DF-8240D	(EPM-8240D-7.0-1.0)	DVP-DL-70N + TLK-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)
DVP-DF-8240H	(EPM-8240H-7.0-1.0)	KS-EPM-8240XH-6.0-1.0	

Pressure plate with tube:

TRP-45xLL	(EPT-45xLL-PA)
BTRP-45xLL	(EPT-B-45xLL-PA)
TWP-8040xLL	(EPT-8040xLL-PA)
TLK-45xLL	(EPT-45xLL-PP)
HTLK-45xLL	(EPT-O-45xLL-PP)
TLK-75xLL	(EPT-75xLL-PP)

Termination bar:

EDF-BAR F-TUBE	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)
EDF-BAR F-TUBE + KMT-15xLL	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)
EBS-xxxxx-25-7.1-1.25	(BC-EBS-xxxxx-25-7.1-1.25)

Substrate:

Autoclaved aerated concrete	AAC 600 kg/m ³	EN 12602
Concrete	C12/15, C20/25, C25/30	EN 206
OSB/3	$\rho_{min} = 550 \text{ kg/m}^3$	EN 12369-1
Chipboard	$\rho_{min} = 600 \text{ kg/m}^3$	EN 12369-1
Plywood	$\rho_{min} = 400 \text{ kg/m}^3$	EN 12369-2
Timber, class $\geq$ C24	$\rho_{min} = 350 \text{ kg/m}^3$	EN 338

Installation data:

Head type:	Raised Bugle Head
Recess:	TX25
Effective anchoring depth in autoclaved aerated concrete substrate h_{ef} :	$\geq 60 \text{ mm}$
Fixing in wooden and wood-based substrate:	Full thread through the substrate or minimum embedment depth
Installation force of installation tool in autoclaved aerated concrete substrate	15 kg
Installation tool speed in autoclaved aerated concrete substrate:	1000 rpm
Installation force of installation tool in wooden and wood-based substrate:	30 kg
Installation tool speed in wooden and wood-based substrate:	2000 - 2500 rpm



Eurofast Flat Roof Fasteners

GBSA2-60xLL (ERAS-60xLL-0-T25-S)

Annex L.3

of European
Technical Assessment
ETA-23/0651

TRP-45xLL or EPT-45xLL-PA

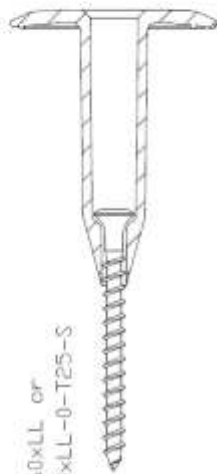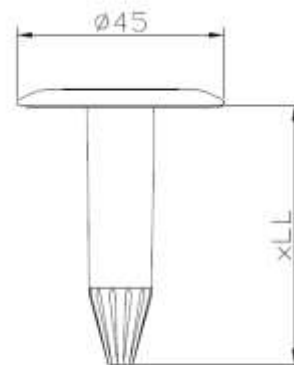GBSA2-60xLL or
ERAS-60xLL-0-T25-S



Eurofast Flat Roof Fasteners

GBSA2-60xLL (ERAS-60xLL-0-T25-S)



Annex L.4

of European
Technical Assessment
ETA-23/0651

BTRP-45xLL or EPT-B-45xLL-PA

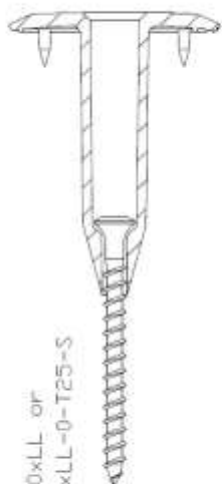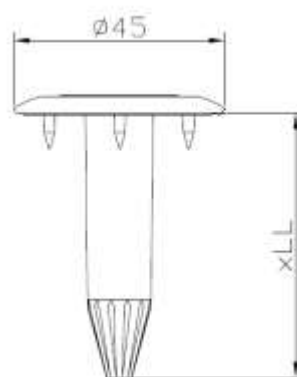
GBSA2-60xLL or
ERAS-60xLL-0-T25-S


TWP-8040xLL or EPT-8040xLL-PA

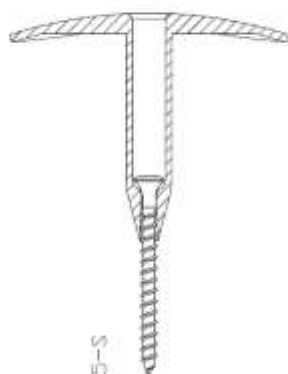
GBSA2-60xLL or
ERAS-60xLL-0-T25-S


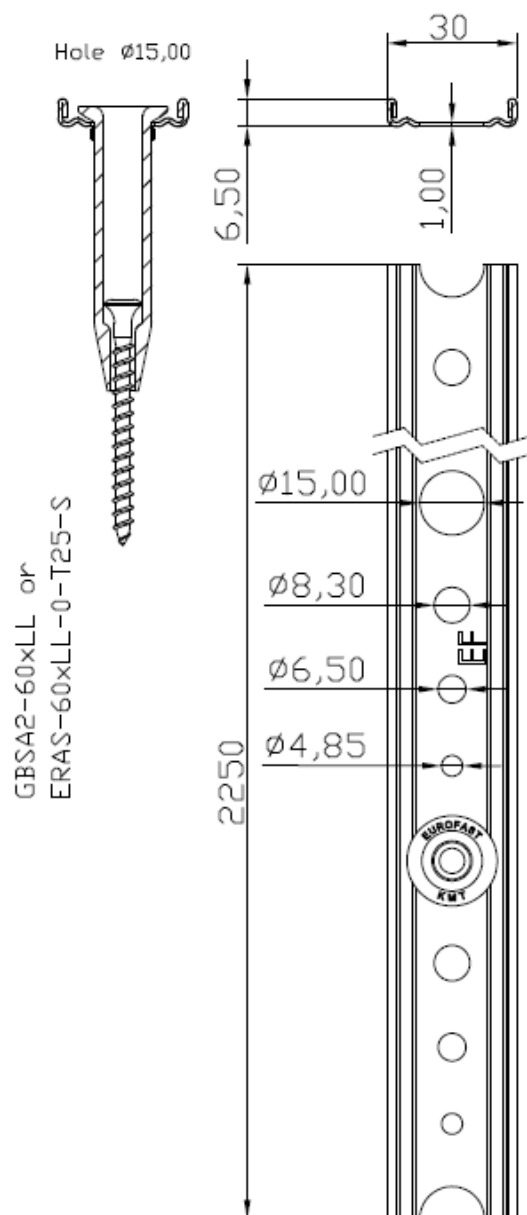
Eurofast Flat Roof Fasteners

GBSA2-60xLL (ERAS-60xLL-0-T25-S)


Annex L.5

of European
Technical Assessment
ETA-23/0651

EDF-BAR-F-TUBE + KMT-15xLL or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0
+ EPT-15xLL-PA



EDF-BAR-F-TUBE or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0

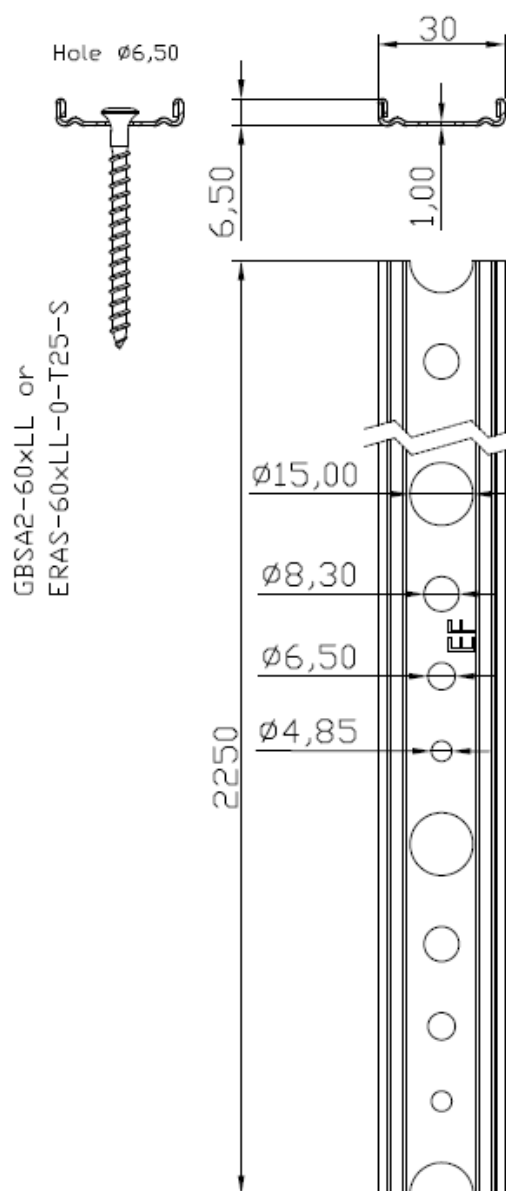



Eurofast Flat Roof Fasteners

GBSA2-60xLL (ERAS-60xLL-0-T25-S)




Annex L.6

of European
Technical Assessment
ETA-23/0651

TLK-45xLL or EPT-45xLL-PP

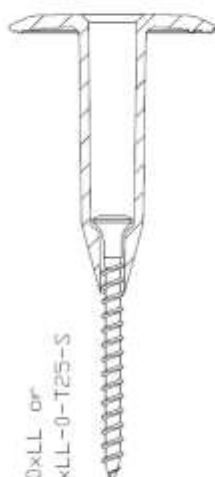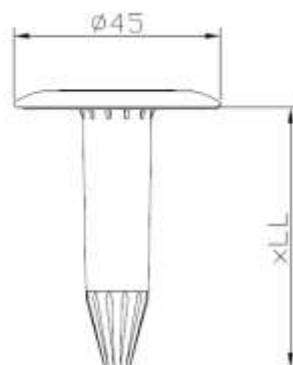
GBSA2-60xLL or
ERAS-60xLL-0-T25-S


HTLK-45xLL or EPT-45xLL-PP

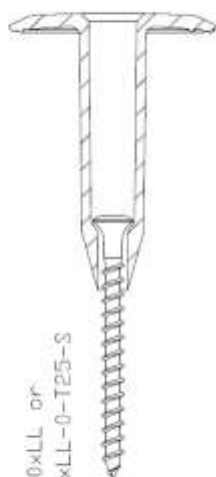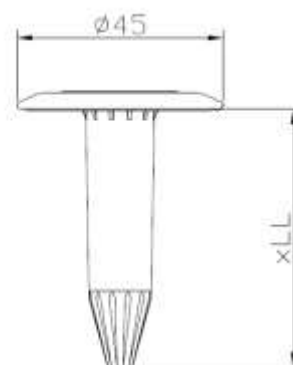
GBSA2-60xLL or
ERAS-60xLL-0-T25-S


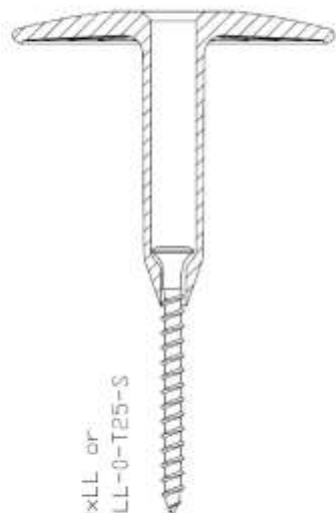
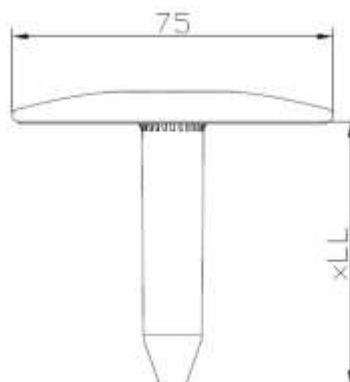
Eurofast Flat Roof Fasteners

GBSA2-60xLL (ERAS-60xLL-0-T25-S)




Annex L.7

of European
Technical Assessment
ETA-23/0651

TLK-75xLL or EPT-75xLL-PP

GBSA2-60xLL or
ERAS-60xLL-0-T25-S

DVP-EF-4010N or EPM-40N-6,0-L0




GBSA2-60xLL or
ERAS-60xLL-0-T25-S

Eurofast Flat Roof Fasteners


GBSA2-60xLL (ERAS-60xLL-0-T25-S)

Annex L.8
of European
Technical Assessment
ETA-23/0651



DVP-EF-5010D or EPM-50D-6.3-1.0

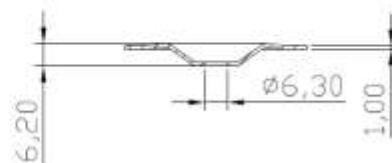
GBSA2-60xLL or
ERAS-60xLL-0-T25-S



OR



DVP-EF-5010N or EPM-50N-6.3-1.0

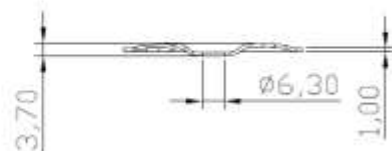
GBSA2-60xLL or
ERAS-60xLL-0-T25-S


OR





Eurofast Flat Roof Fasteners

GBSA2-60xLL (ERAS-60xLL-0-T25-S)



Annex L.9

of European
Technical Assessment
ETA-23/0651

DVP-DF-7070D or EPM-7070D-7.0-1.0

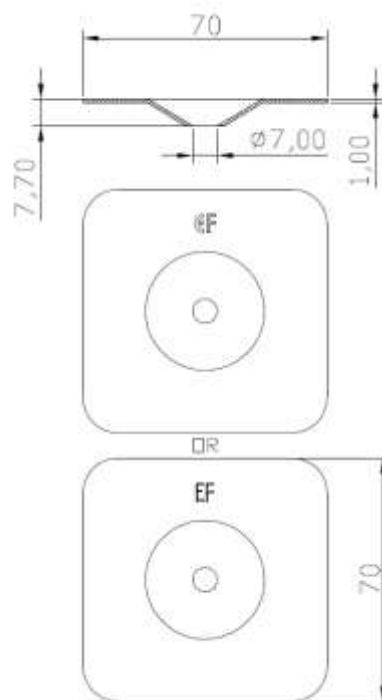GBSA2-60xLL or
ERAS-60xLL-0-T25-S

DVP-EF-7007D or EPM-70D-6.0-0.7


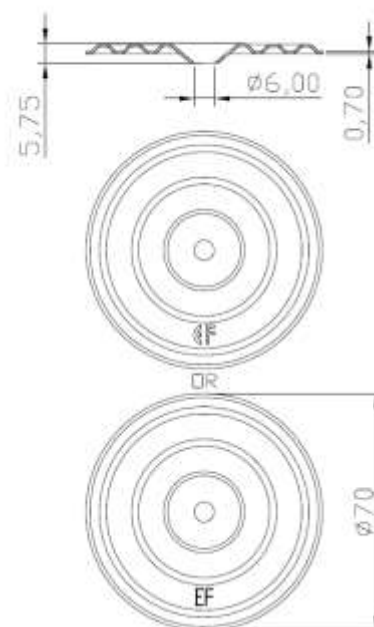
GBSA2-60xLL or
ERAS-60xLL-0-T25-S

Eurofast Flat Roof Fasteners



GBSA2-60xLL (ERAS-60xLL-0-T25-S)

Annex L.10
of European
Technical Assessment
ETA-23/0651

DVP-EF-7010D or EPM-70D-6.5-1.0

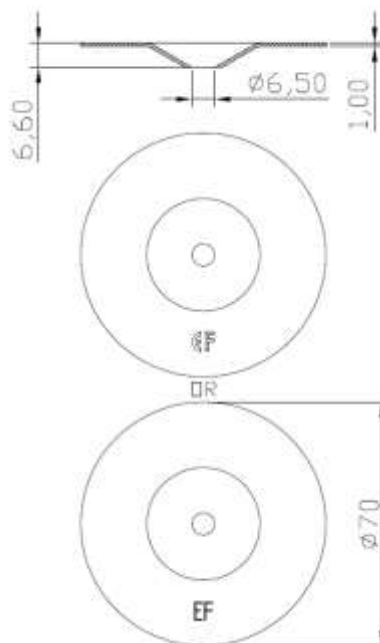
GBSA2-60xLL or
ERAS-60xLL-0-T25-S


DVP-EF-7007H or EPM-70H-6.0-0.7

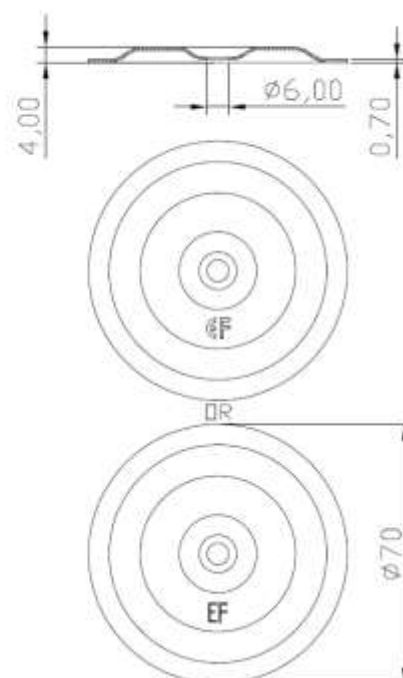
GBSA2-60xLL or
ERAS-60xLL-0-T25-S



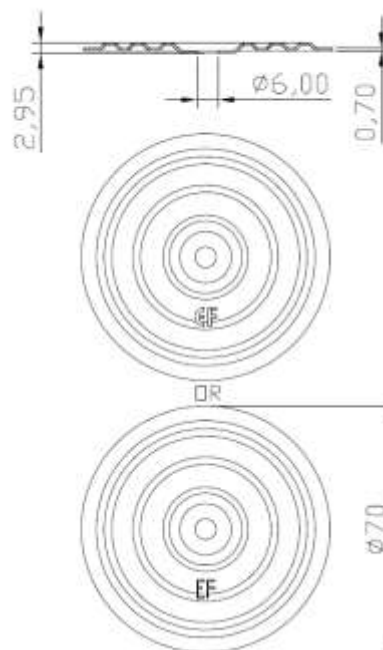
Eurofast Flat Roof Fasteners

GBSA2-60xLL (ERAS-60xLL-0-T25-S)


Annex L.11

of European
Technical Assessment
ETA-23/0651

DVP-EF-7007N or EPM-70N-6.0-0.7

GBSA2-60xLL or
ERAS-60xLL-0-T25-S

DVP-EF-7010N or EPM-70N-6.5-1.0



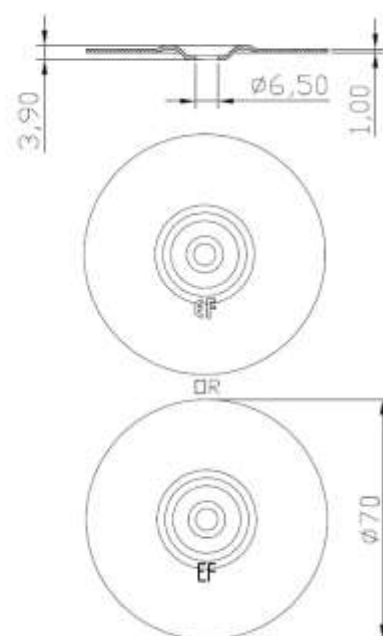
GBSA2-60xLL or
ERAS-60xLL-0-T25-S

Eurofast Flat Roof Fasteners


GBSA2-60xLL (ERAS-60xLL-0-T25-S)

Annex L.12
of European
Technical Assessment
ETA-23/0651

DVP-EF-8040D or EPM-8040D-6.5-1.0



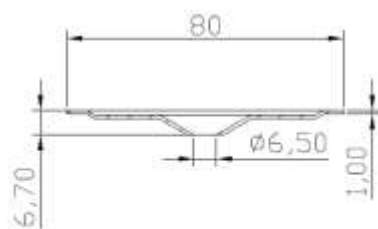

GBSA2-60xLL or
ERAS-60xLL-0-T25-S


DR




40

DVP-EF-8040N or EPM-8040N-6.5-1.0

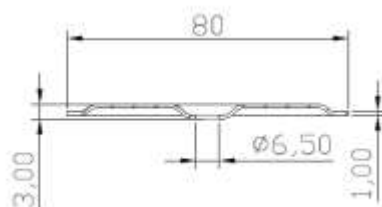
GBSA2-60xLL or
ERAS-60xLL-0-T25-S


DR




40

Eurofast Flat Roof Fasteners



GBSA2-60xLL (ERAS-60xLL-0-T25-S)

Annex L.13
of European
Technical Assessment
ETA-23/0651

DVP-DF-8240D or EPM-8240D-7.00-1.0



GBSA2-60xLL or
ERAS-60xLL-0-T25-S

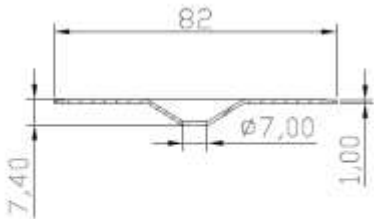


DR



DVP-DF-8240H or EPM-8240H-7.0-1.0



GBSA2-60xLL or
ERAS-60xLL-0-T25-S

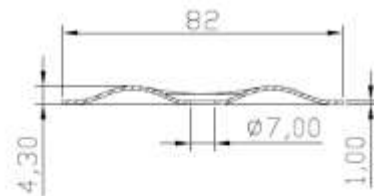



DR



Eurofast Flat Roof Fasteners



GBSA2-60xLL (ERAS-60xLL-0-T25-S)

Annex L.14
of European
Technical Assessment
ETA-23/0651


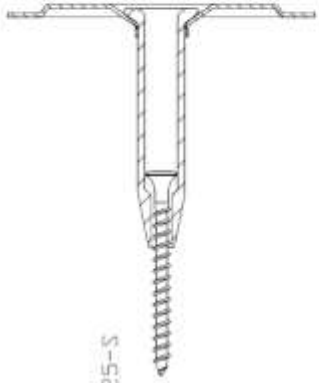
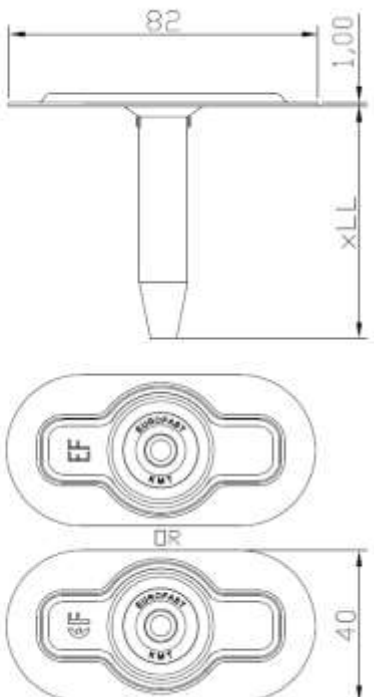
DVP-KMT-8240 + KMT-15xLL or EPM-T-8240N-13,6-1.0 + EPT-15xLL-PA  GBSA2-60xLL or ERAS-60xLL-0-T25-S	
DVP-DF-8240XH or EPM-8240XH-7,0-1.0  GBSA2-60xLL or ERAS-60xLL-0-T25-S	
Eurofast Flat Roof Fasteners	Annex L.15 of European Technical Assessment ETA-23/0651

GBSA2-60xLL (ERAS-60xLL-0-T25-S)

DVP-EF-S1N or EPM-S1N-6,7-0,84

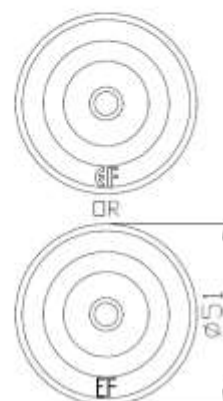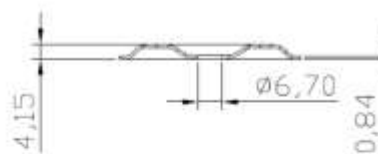GBSA2-60xLL or
ERAS-60xLL-0-T25-S


DVP-DFB-8240D or EPM-B-8240D-7,0-1,0

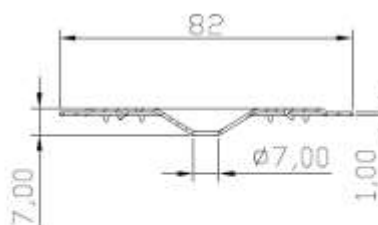GBSA2-60xLL or
ERAS-60xLL-0-T25-S**Eurofast Flat Roof Fasteners**



GBSA2-60xLL (ERAS-60xLL-0-T25-S)

Annex L.16
of European
Technical Assessment
ETA-23/0651


EPM-T-IP-80-13.6-0.8 + KMT-15xLL or
EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA

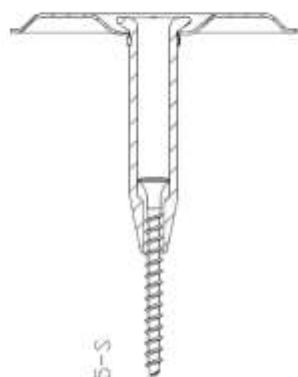


GBSA2-60xLL or
ERAS-60xLL-0-T25-S

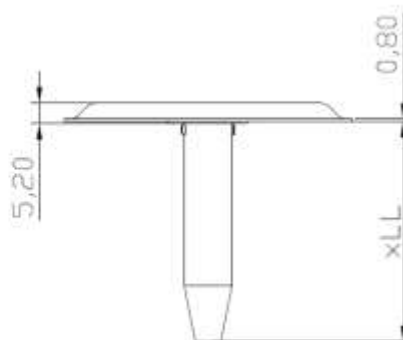

EPM-IP-80-6.8-0.8



GBSA2-60xLL or
ERAS-60xLL-0-T25-S




Eurofast Flat Roof Fasteners



GBSA2-60xLL (ERAS-60xLL-0-T25-S)

Annex L.17
of European
Technical Assessment
ETA-23/0651


EPM-T-IT-80-13.6-0.8 + KMT-15xLL or
EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA

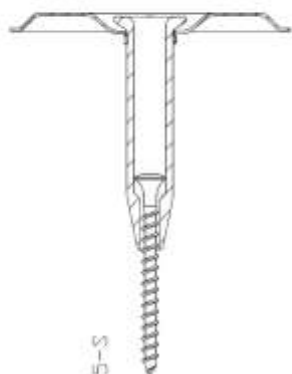



GBSA2-60xLL or
ERAS-60xLL-0-T25-S

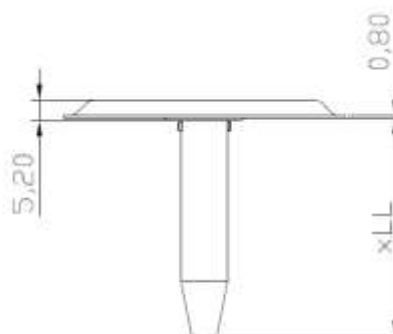

EPM-IT-80-6,8-0.8



GBSA2-60xLL or
ERAS-60xLL-0-T25-S

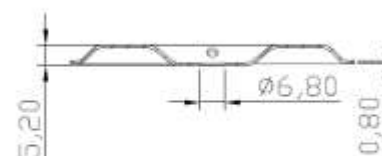


Eurofast Flat Roof Fasteners

GBSA2-60xLL (ERAS-60xLL-0-T25-S)


Annex L.18

of European
Technical Assessment
ETA-23/0651


EPM-T-IE-80-13,6-0,8 + KMT-15xLL or
EPM-T-IE-80-13,6-0,8 + EPT-15xLL-PA

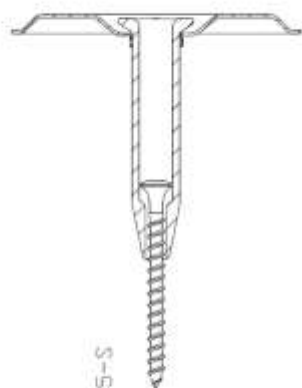



GBSA2-60xLL or
ERAS-60xLL-0-T25-S



EPM-IE-80-6,8-0,8



GBSA2-60xLL or
ERAS-60xLL-0-T25-S

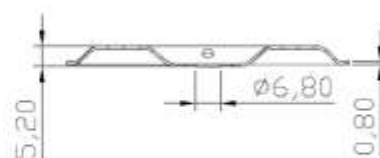


Eurofast Flat Roof Fasteners


GBSA2-60xLL (ERAS-60xLL-0-T25-S)

Annex L.19
of European
Technical Assessment
ETA-23/0651


DVP-DL-70N + TLK-45xLL or
EPM-EDL-70N-20-0.5 + EPT-45xLL-PP

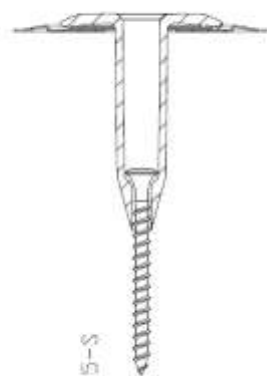


GBSA2-60xLL or
ERAS-60xLL-0-T25-S

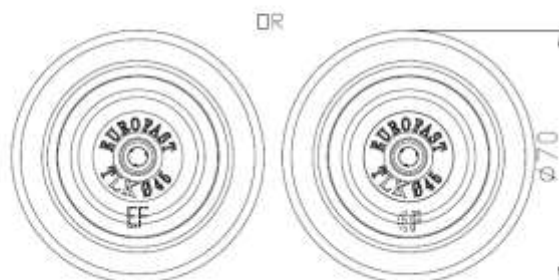

DVP-DL-70N + TRP-45xLL or
EPM-EDL-70N-20-0.5 + EPT-45xLL-PA

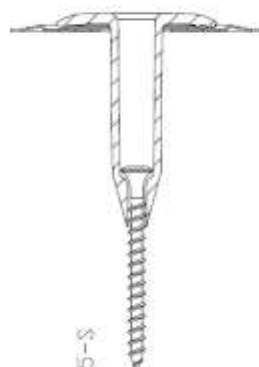

GBSA2-60xLL or
ERAS-60xLL-0-T25-S



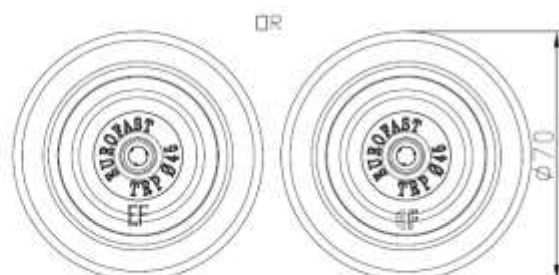


Eurofast Flat Roof Fasteners

GBSA2-60xLL (ERAS-60xLL-0-T25-S)

Annex L.20
of European
Technical Assessment
ETA-23/0651

KS-EPM-8240XH-6.0-1.0

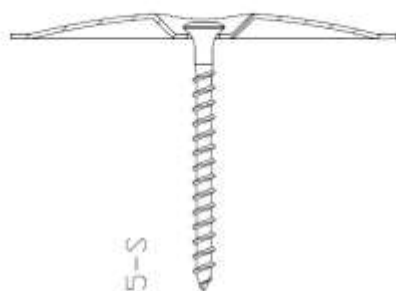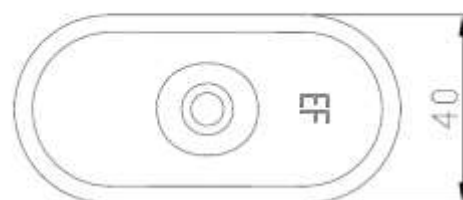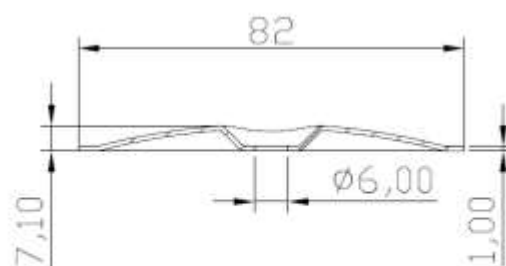

GBSA2-60xLL or
ERAS-60xLL-0-T25-S


Eurofast Flat Roof Fasteners

GBSA2-60xLL (ERAS-60xLL-0-T25-S)

Annex L.21
of European
Technical Assessment
ETA-23/0651


EBS-xxxxx-25-7.1-1.25 or
BC-EBS-xxxxx-25-7.1-1.25

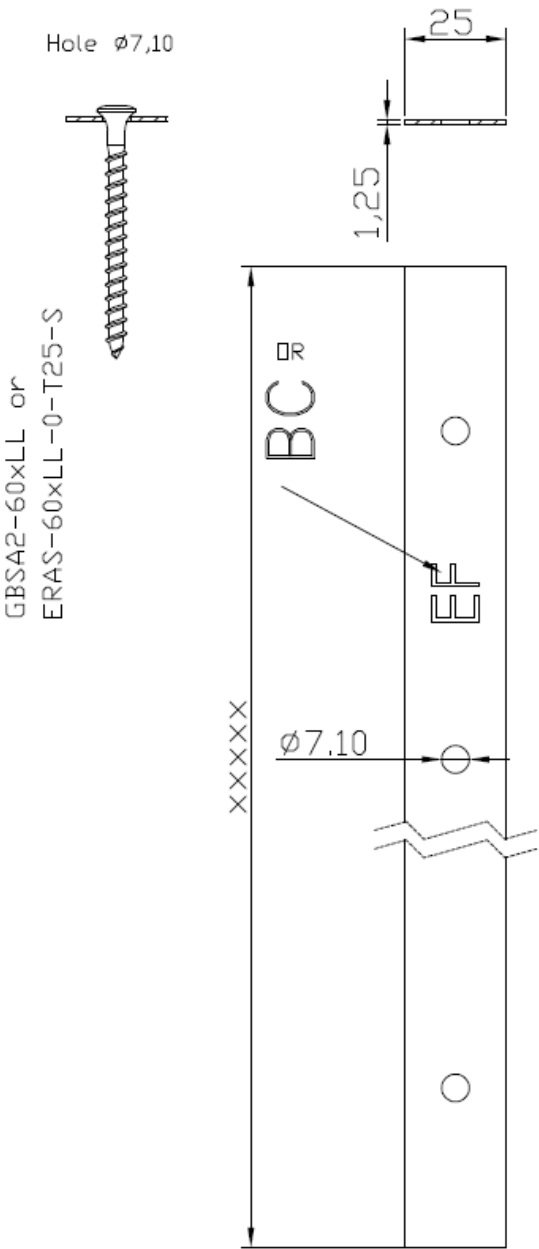

Eurofast Flat Roof Fasteners

GBSA2-60xLL (ERAS-60xLL-0-T25-S)

Annex L.22
of European
Technical Assessment
ETA-23/0651

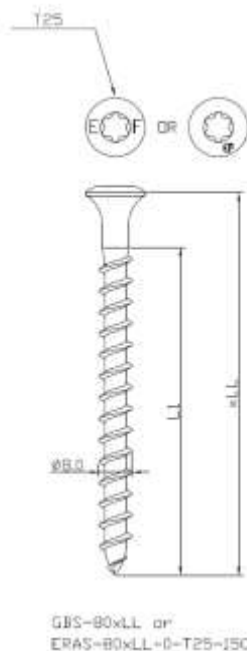

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)					
	Autoclaved aerated concrete AAC 450 kg/m ³	Autoclaved aerated concrete AAC 550 kg/m ³	Concrete C12/15 (drill 6,0 mm)	Concrete C20/25 (drill 6,0 mm)	Chipboard
t [mm]	-	-	-	-	19
GBS-80xLL (ERAS-80xLL-0-T25-15C)	0,98	1,52	4,03	5,20	1,59

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)					
	EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)	DVP-DF-7070D (EPM-7070D-7.0-1.0)	DVP-EF-8040N-9 (EPM-8040N-9.0-1.0)	DVP-EF-51N (EPM-51N-6.7-0.84)	HTLK-45xLL (EPT-O-45xLL-PP)
	EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)	DVP-DF-8240D (EPM-8240D-7.0-1.0)	-	EPM-IP-80-6.8-0.8	-
	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)	DVP-DF-8240H (EPM-8240H-7.0-1.0)	-	EPM-IT-80-6.8-0.8	-
	-	DVP-DF-8240XH (EPM-8240XH-7.0-1.0)	-	EPM-IE-80-6.8-0.8	-
	-	DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)	-	-	-
GBS-80xLL (ERAS-80xLL-0-T25-15C)	5,05	3,77	1,77	3,88	1,77

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

GBS-80xLL (ERAS-80xLL-0-T25-15C)

Annex M.1
of European
Technical Assessment
ETA-23/0651

Screw:

GBS-80xLL (ERAS-80xLL-0-T25-15C)

Metal pressure plate:

DVP-DF-7070D (EPM-7070D-7.0-1.0)
 DVP-EF-8040N-9 (EPM-8040N-9.0-1.0)
 DVP-DF-8240D (EPM-8240D-7.0-1.0)
 DVP-DF-8240H (EPM-8240H-7.0-1.0)
 DVP-DF-8240XH (EPM-8240XH-7.0-1.0)
 DVP-EF-51N (EPM-51N-6.7-0.8)
 DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)
 EPM-IP-80-6.8-0.8
 EPM-IT-80-6.8-0.8
 EPM-IE-80-6.8-0.8

Pressure plate tube:

HTLK-45xLL (EPT-O-45xLL-PP)

Termination bar:

EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)
 EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)
 EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)

Substrate:

Autoclaved aerated concrete	AAC 450 kg/m ³	EN 12602
Autoclaved aerated concrete	AAC 550 kg/m ³	EN 12602
Concrete	C12/15, C20/25	EN 206
Chipboard	$\rho_{min} = 600\text{kg/m}^3$	EN 12369-1



Installation data:

Head type:	Raised Bugle Head
Recess:	TX25
Effective anchoring depth in autoclaved aerated concrete substrate h_{ef} :	$\geq 60\text{ mm}$
Effective anchoring depth in concrete substrate h_{ef} :	$\geq 25\text{ mm}$
Concrete drill diameter:	6,0 mm
Drilled hole depth in concrete:	$h_{ef} + 12\text{ mm}$
Fixing in wooden substrate:	Full thread through the substrate or minimum embedment depth
Installation force of installation tool on autoclaved aerated concrete:	15 kg
Installation tool speed on autoclaved aerated concrete:	1000 rpm
Installation force of installation tool on concrete:	15 kg + impact
Installation tool speed on concrete:	100 rpm
Installation force of installation tool in wooden substrate:	30 kg
Installation tool speed in wooden substrate:	2000 - 2500 rpm


Eurofast Flat Roof Fasteners

GBS-80xLL (ERAS-80xLL-0-T25-15C)

Annex M.2
 of European
 Technical Assessment
 ETA-23/0651

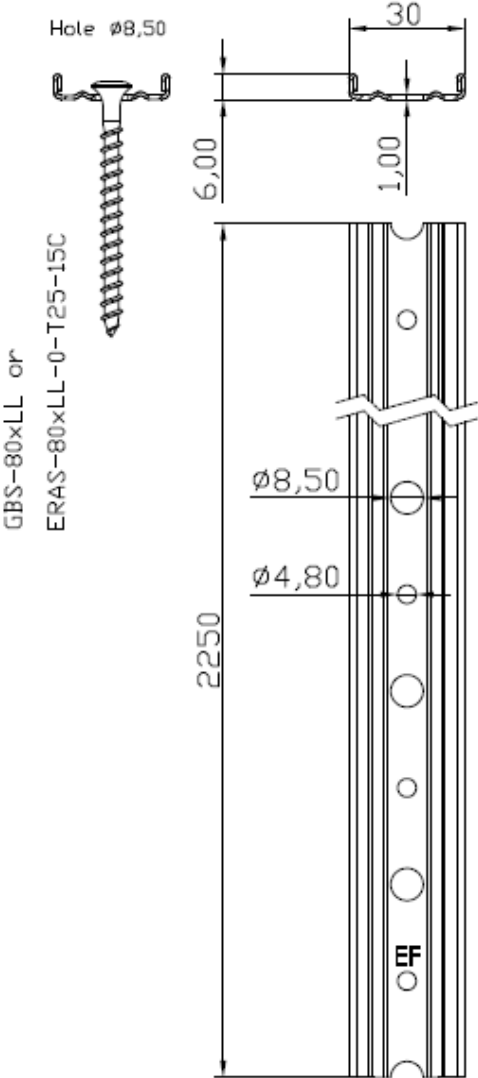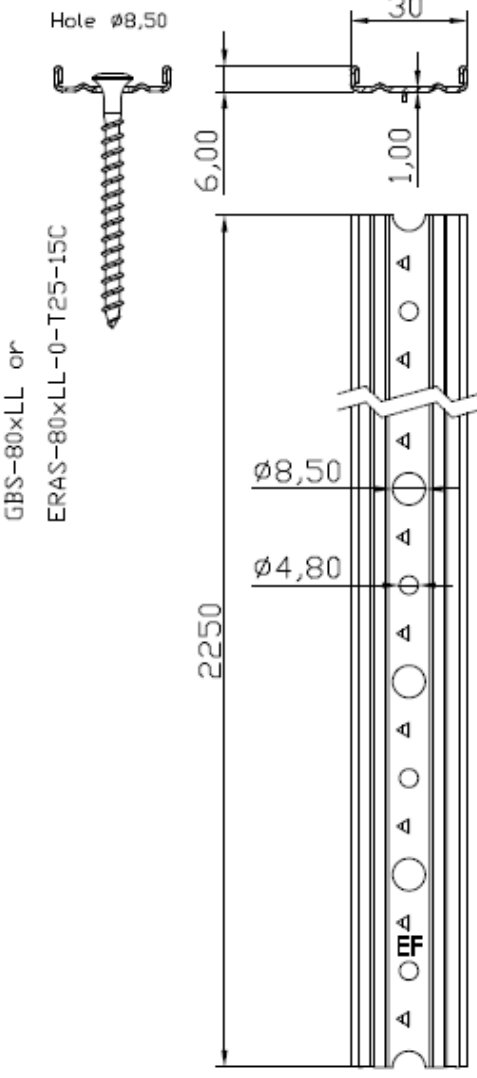EDF-BAR F or ETM-2250-30-4.8-8.5-1.0  GBS-80xLL or ERAS-80xLL-0-T25-15C	EDF-BAR FB or ETM-B-2250-30-4.8-8.5-1.0  GBS-80xLL or ERAS-80xLL-0-T25-15C
Eurofast Flat Roof Fasteners	Annex M.3 of European Technical Assessment ETA-23/0651
GBS-80xLL (ERAS-80xLL-0-T25-15C)	

EDF-BAR-F-TUBE or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0

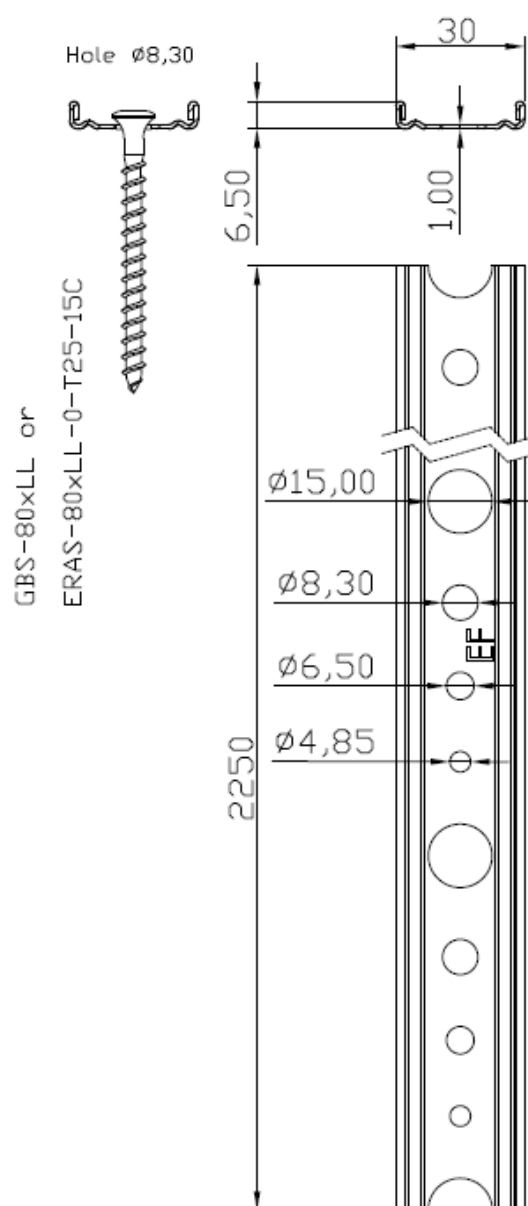


Eurofast Flat Roof Fasteners


GBS-80xLL (ERAS-80xLL-0-T25-15C)

Annex M.4
of European
Technical Assessment
ETA-23/0651

DVP-DF-7070D or EPM-7070D-7,0-1,0

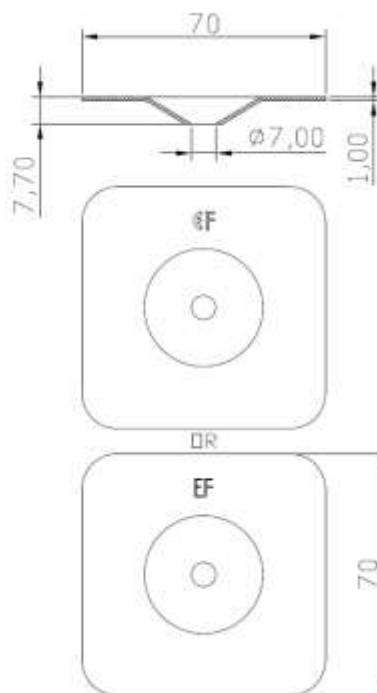
GBS-80xLL or
ERAS-80xLL-0-T25-15C



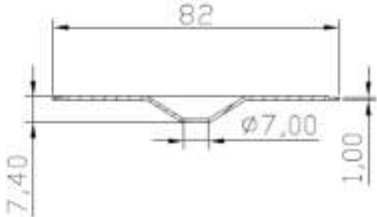

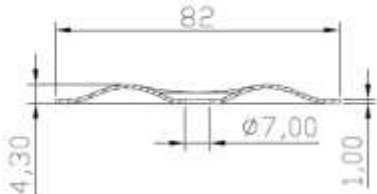

DVP-EF-8040N-9 or EPM-8040N-9,0-1,0

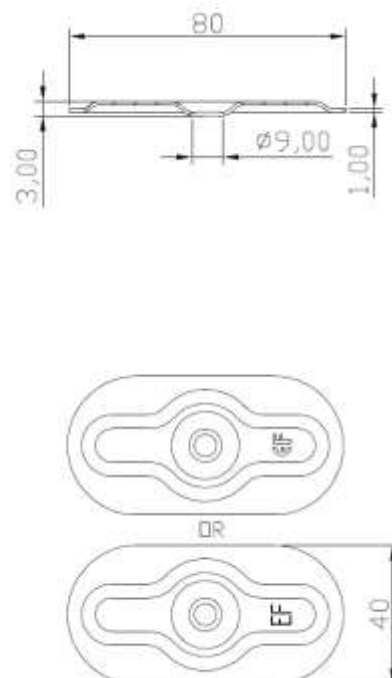
GBS-80xLL or
ERAS-80xLL-0-T25-15C



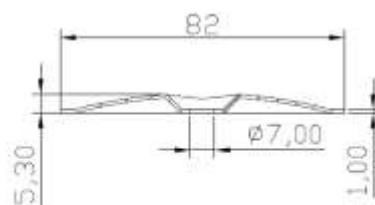
Eurofast Flat Roof Fasteners

GBS-80xLL (ERAS-80xLL-0-T25-15C)

Annex M.5
of European
Technical Assessment
ETA-23/0651

DVP-DF-8240D or EPM-8240D-7,00-1,0  GBS-80xLL or ERAS-80xLL-0-T25-15C  	
DVP-DF-8240H or EPM-8240H-7,0-1,0  GBS-80xLL or ERAS-80xLL-0-T25-15C  	
Eurofast Flat Roof Fasteners	Annex M.6 of European Technical Assessment ETA-23/0651
GBS-80xLL (ERAS-80xLL-0-T25-15C)	



DVP-DF-8240XH or EPM-8240XH-7.0-1.0


GBS-80xLL or
ERAS-80xLL-0-T25-15C


OR



DVP-EF-51N or EPM-51N-6.7-0.84

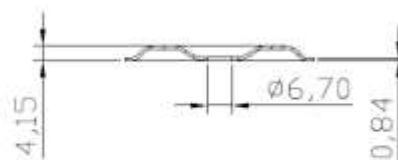
GBS-80xLL or
ERAS-80xLL-0-T25-15C


OR





Eurofast Flat Roof Fasteners

GBS-80xLL (ERAS-80xLL-0-T25-15C)


Annex M.7

of European
Technical Assessment
ETA-23/0651

DVP-DFB-8240D or EPM-B-8240D-7.0-1.0

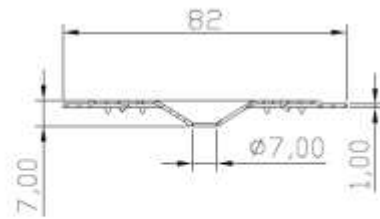GBS-80xLL or
ERAS-80xLL-0-T25-15C



EPM-IP-80-6,8-0,8


GBS-80xLL or
ERAS-80xLL-0-T25-15C

Eurofast Flat Roof Fasteners

GBS-80xLL (ERAS-80xLL-0-T25-15C)

Annex M.8
of European
Technical Assessment
ETA-23/0651

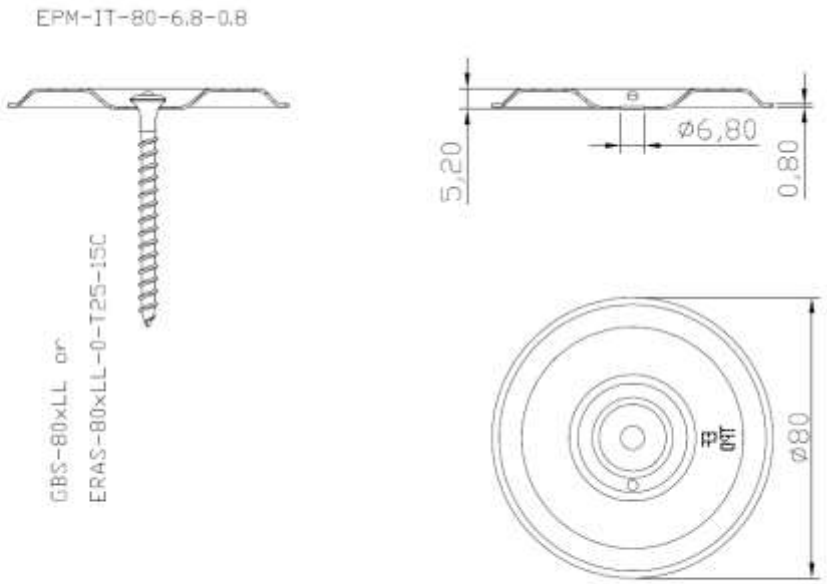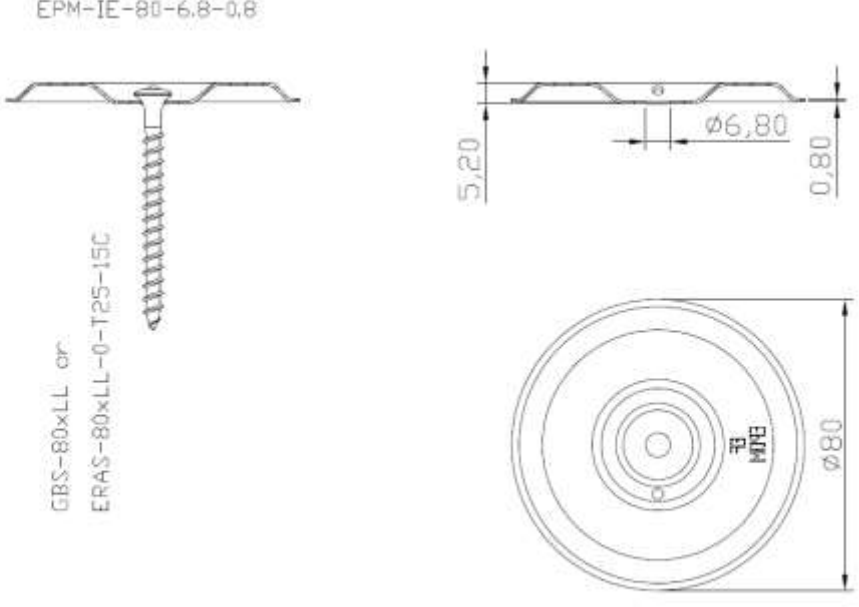
EPM-IT-80-6.8-0.8  GBS-80xLL or ERAS-80xLL-0-T25-15C	
EPM-IE-80-6.8-0.8  GBS-80xLL or ERAS-80xLL-0-T25-15C	
Eurofast Flat Roof Fasteners GBS-80xLL (ERAS-80xLL-0-T25-15C)	Annex M.9 of European Technical Assessment ETA-23/0651

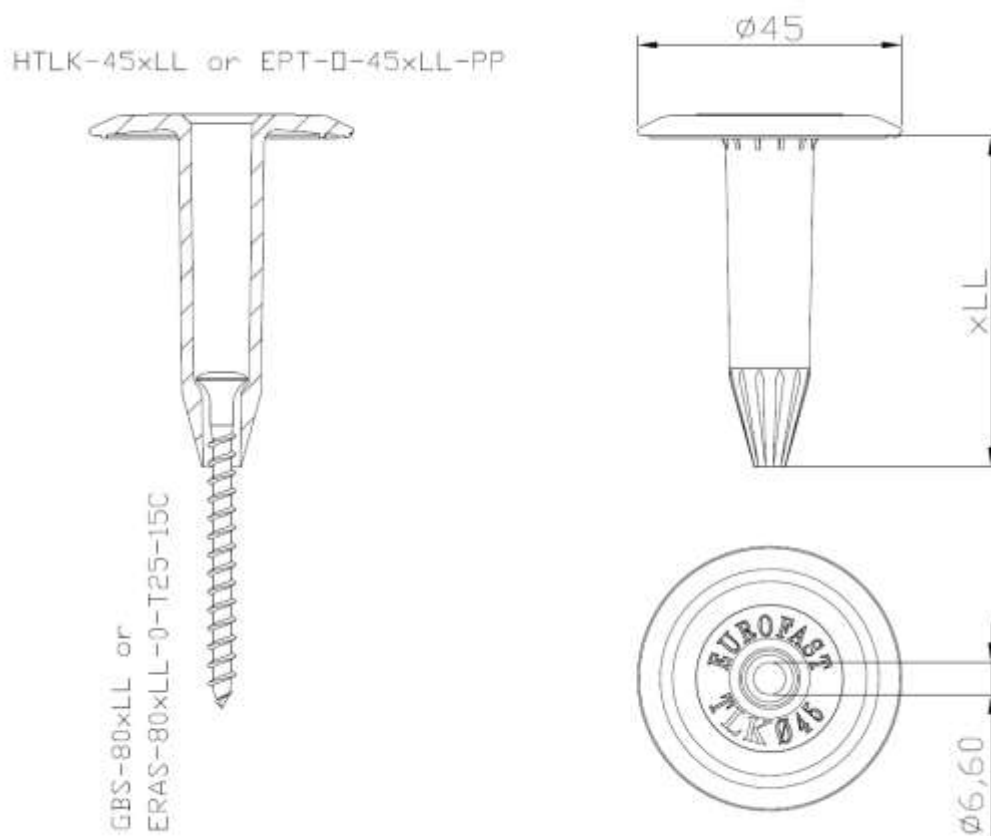

Eurofast Flat Roof Fasteners

GBS-80xLL (ERAS-80xLL-0-T25-15C)

Annex M.10
of European
Technical Assessment
ETA-23/0651

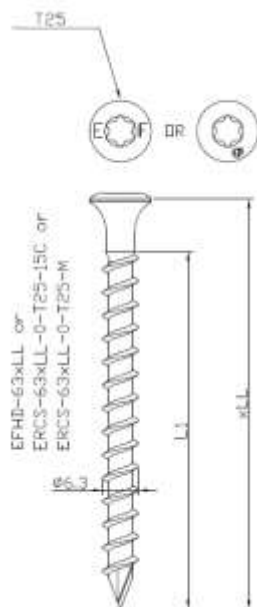

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)				
	Concrete C12/15 (drill 5,0 mm)	Concrete C20/25 (drill 5,2 mm)*	Concrete C20/25 (drill 5,5 mm)**	Concrete C25/30 (drill 5,5 mm)**
EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)	2,02	2,61	2,40	2,62

* value also valid for holes drilled with 5,0 mm drill

** value also valid for holes drilled with 5,2 mm or 5,0 mm drill

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)		
	DVP-EF-51N (EPM-51N-6.7-0.84)	EPM-IP-80-6.8-0.8
	-	EPM-IT-80-6.8-0.8
	-	EPM-IE-80-6.8-0.8
EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)	2,93	2,92

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)

Annex N.1
of European
Technical Assessment
ETA-23/0651

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	-	TLK-45xLL (EPT-45xLL-PP)	HTLK-45xLL (EPT-O-45xLL-PP)
	TRP-45xLL (EPT-45xLL-PA)	TLK-75xLL (EPT-75xLL-PP)	-
	BTRP-45xLL (EPT-B-45xLL-PA)	DVP-DL-70N + TLK-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)	-
	TWP-8040xLL (EPT-8040xLL-PA)	-	-
	EDF-BAR F-TUBE + KMT-15xLL (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)	-	-
	DVP-KMT-8240 + KMT-15xLL (EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)	-	-
	EPM-T-IP-80-13.6-0.8 + KMT-15xLL (EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IT-80-13.6-0.8 + KMT-15xLL (EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IE-80-13.6-0.8 + KMT-15xLL (EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	DVP-DL-70N + TRP-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)	-	-
EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)	2,64	1,68	1,78

* "Pull-over" according to CEN/TS 17659:2021

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)					
	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)	DVP-EF-4010N (EPM-40N-6.0-1.0)	DVP-EF-5010D (EPM-50D-6.3-1.0)	DVP-DF-7070D (EPM-7070D-7.0-1.0)	DVP-EF-7007D (EPM-70D-6.0-0.7)
	DVP-EF-7010D (EPM-70D-6.5-1.0)	KS-EPM-8240XH-6.0-1.0	DVP-EF-5010N (EPM-50N-6.3-1.0)	DVP-DF-8240D (EPM-8240D-7.0-1.0)	DVP-EF-7007H (EPM-70H-6.0-0.7)
	DVP-EF-7010N (EPM-70N-6.5-1.0)	-	-	DVP-DF-8240H (EPM-8240H-7.0-1.0)	DVP-EF-7007N (EPM-70N-6.0-0.7)
	DVP-EF-8040D (EPM-8040D-6.5-1.0)	-	-	DVP-DF-8240XH (EPM-8240XH-7.0-1.0)	-
	DVP-EF-8040N (EPM-8040N-6.5-1.0)	-	-	DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)	-
	-	-	-	EBS-xxxxx-25-7.1-1.25 (BC-EBS-xxxxx-25-7.1-1.25)	-
EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)	5,05	4,43	3,89	2,96	2,91

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners	Annex N.2 of European Technical Assessment ETA-23/0651
EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)	

Screw:

EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)

Metal pressure plate:

DVP-EF-4010N	(EPM-40N-6.0-1.0)	DVP-DF-8240XH	(EPM-8240XH-7.0-1.0)
DVP-EF-5010D	(EPM-50D-6.3-1.0)	DVP-EF-51N	(EPM-51N-6.7-0.84)
DVP-EF-5010N	(EPM-50N-6.3-1.0)	DVP-DFB-8240D	(EPM-B-8240D-7.0-1.0)
DVP-DF-7070D	(EPM-7070D-7.0-1.0)	EPM-IP-80-6.8-0.8	
DVP-EF-7007D	(EPM-70D-6.0-0.7)	EPM-IT-80-6.8-0.8	
DVP-EF-7010D	(EPM-70D-6.5-1.0)	EPM-IE-80-6.8-0.8	
DVP-EF-7007H	(EPM-70H-6.0-0.7)	DVP-KMT-8240 + KMT-15xLL	(EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)
DVP-EF-7007N	(EPM-70N-6.0-0.7)	EPM-T-IP-80-13.6-0.8 + KMT-15xLL	(EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-7010N	(EPM-70N-6.5-1.0)	EPM-T-IT-80-13.6-0.8 + KMT-15xLL	(EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8040D	(EPM-8040D-6.5-1.0)	EPM-T-IE-80-13.6-0.8 + KMT-15xLL	(EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8040N	(EPM-8040N-6.5-1.0)	DVP-DL-70N + TRP-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)
DVP-DF-8240D	(EPM-8240D-7.0-1.0)	DVP-DL-70N + TLK-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)
DVP-DF-8240H	(EPM-8240H-7.0-1.0)	KS-EPM-8240XH-6.0-1.0	

Pressure plate with tube:

TRP-45xLL	(EPT-45xLL-PA)
BTRP-45xLL	(EPT-B-45xLL-PA)
TWP-8040xLL	(EPT-8040xLL-PA)
TLK-45xLL	(EPT-45xLL-PP)
HTLK-45xLL	(EPT-O-45xLL-PP)
TLK-75xLL	(EPT-75xLL-PP)

Termination bar:

EDF-BAR F-TUBE	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)
EDF-BAR F-TUBE + KMT-15xLL	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)
EBS-xxxxx-25-7.1-1.25	(BC-EBS-xxxxx-25-7.1-1.25)

Substrate:

Concrete C12/15, C20/25, C25/30 EN 206

Technical data

Head type:	Raised Bugle Head
Recess:	TX25
Effective anchoring depth h_{ef} :	≥ 30 mm
Concrete drill diameter in concrete C12/15:	5,0 mm
Concrete drill diameter in concrete C20/25:	5,2 or 5,5 mm
Concrete drill diameter in concrete C25/30:	5,5 mm
Drilled hole depth:	$h_{ef} + 10$ mm
Installation force of installation tool:	15 kg + impact
Installation tool speed:	100 rpm



Eurofast Flat Roof Fasteners

EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)

Annex N.3

of European
Technical Assessment
ETA-23/0651

TRP-45xLL or EPT-45xLL-PA

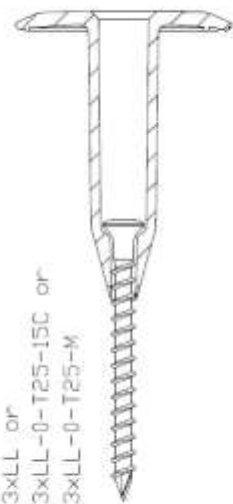
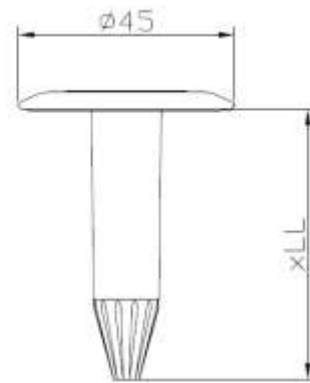
EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M

Eurofast Flat Roof Fasteners


EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)

Annex N.4

of European
Technical Assessment
ETA-23/0651

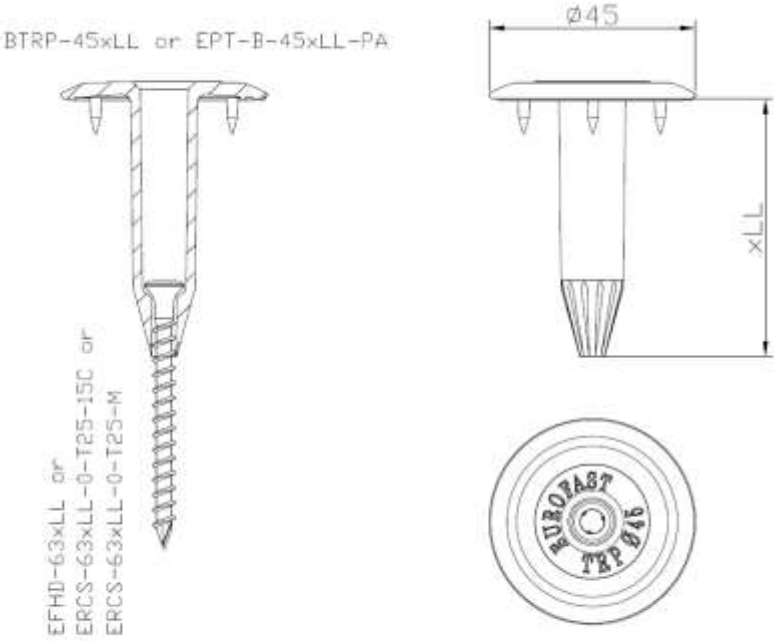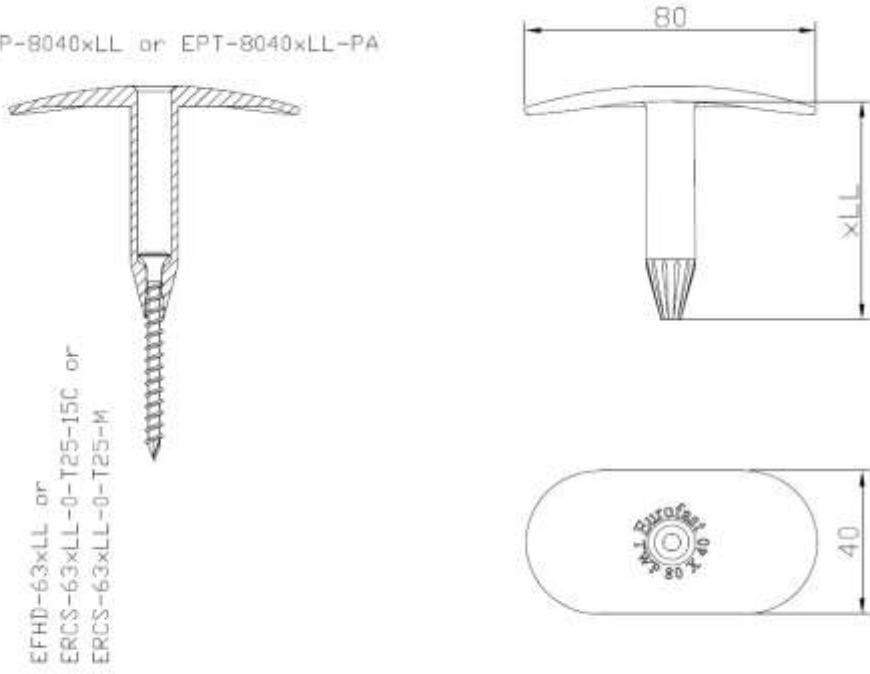
BTRP-45xLL or EPT-B-45xLL-PA  EFHD-63xLL or ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M	
TWP-8040xLL or EPT-8040xLL-PA  EFHD-63xLL or ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M	
Eurofast Flat Roof Fasteners	Annex N.5 of European Technical Assessment ETA-23/0651
EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)	

EDF-BAR-F-TUBE + KMT-15xLL or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0
+ EPT-15xLL-PA

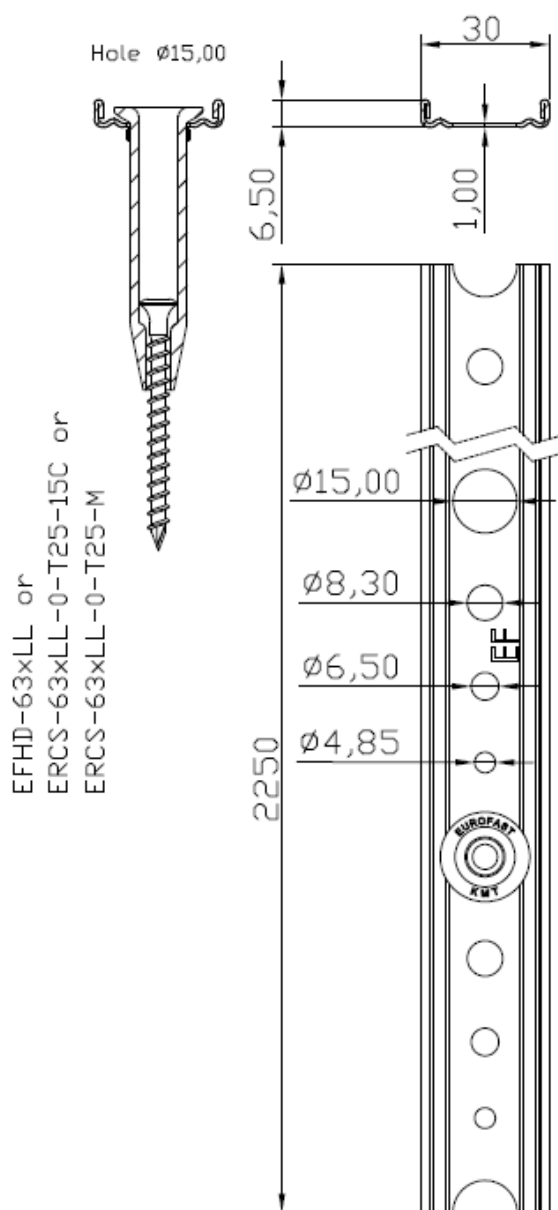

EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M

EDF-BAR-F-TUBE or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0

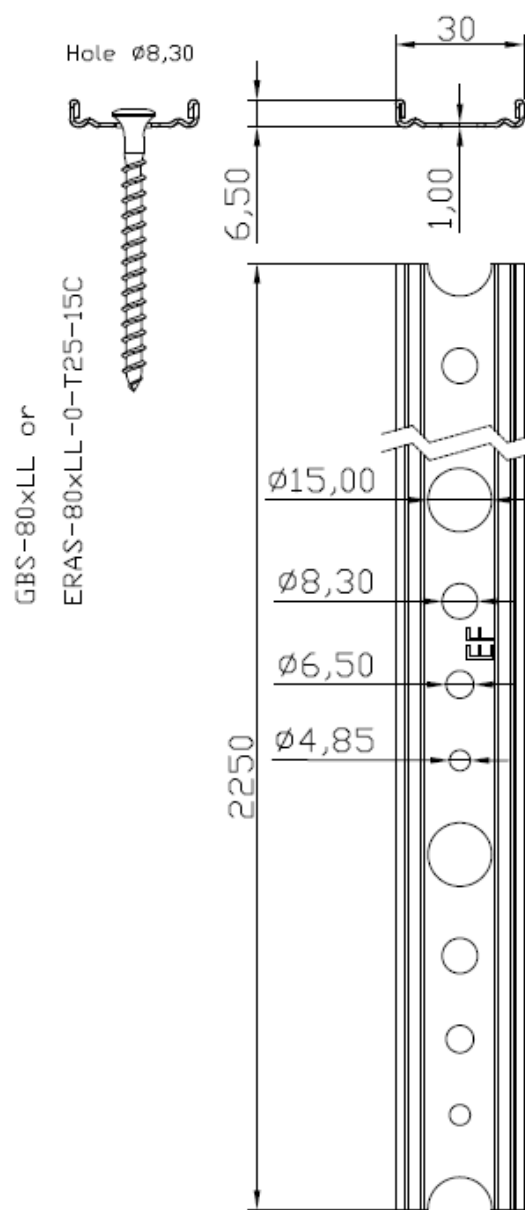





GBS-80xLL or
ERAS-80xLL-0-T25-15C



Eurofast Flat Roof Fasteners

EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)




Annex N.6

of European
Technical Assessment
ETA-23/0651

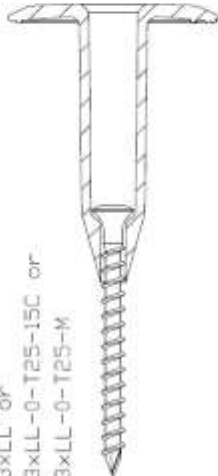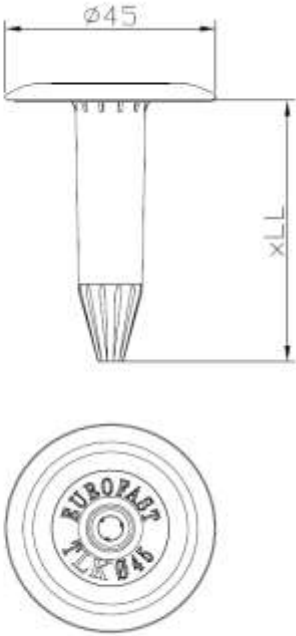
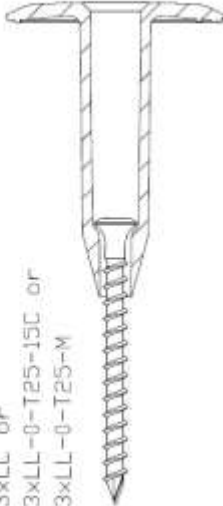
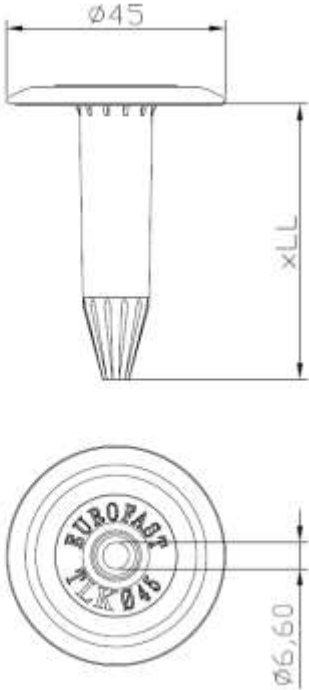
TLK-45xLL or EPT-45xLL-PP  EFHD-63xLL or ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M	 Side view dimensions: $\varnothing 45$, xLL Top view: EUROFAST TLK $\varnothing 45$
HTLK-45xLL or EPT-0-45xLL-PP  EFHD-63xLL or ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M	 Side view dimensions: $\varnothing 45$, xLL Top view: EUROFAST TLK $\varnothing 45$, $\varnothing 6,60$
Eurofast Flat Roof Fasteners	Annex N.7 of European Technical Assessment ETA-23/0651
EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)	

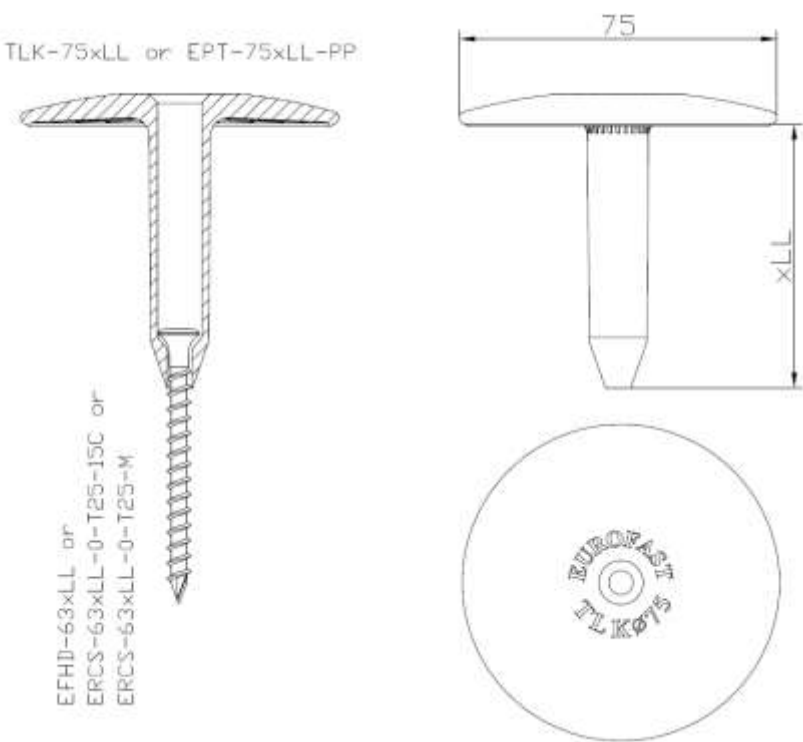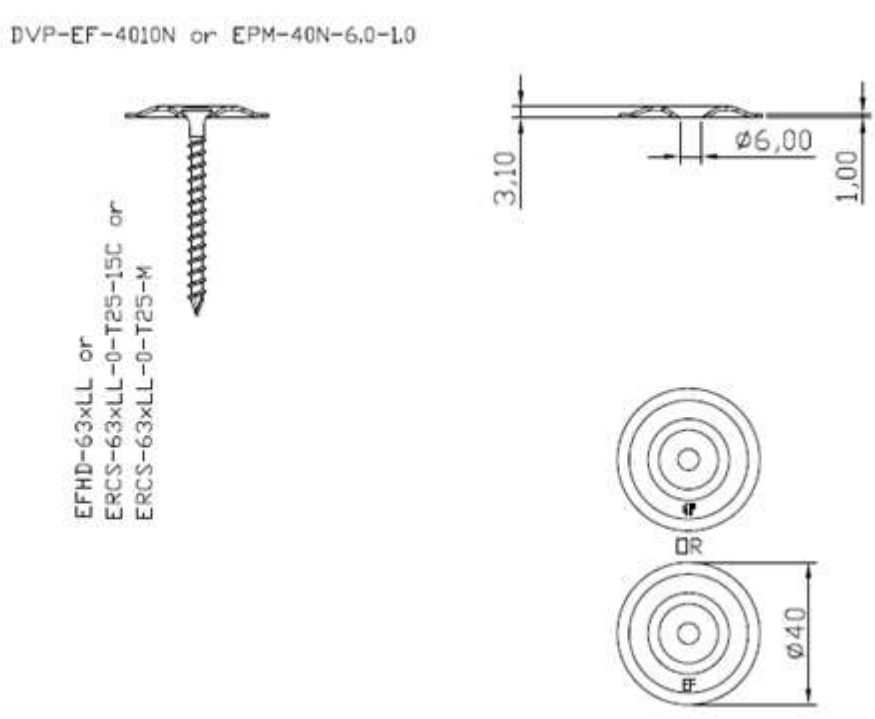TLK-75xLL or EPT-75xLL-PP  EFHD-63xLL or ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M DVP-EF-4010N or EPM-40N-6,0-1,0  EFHD-63xLL or ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M	
Eurofast Flat Roof Fasteners	Annex N.8 of European Technical Assessment ETA-23/0651
EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)	

DVP-EF-5010D or EPM-50D-6,3-1.0

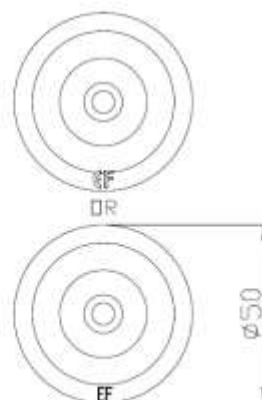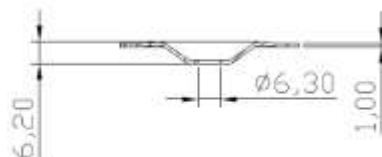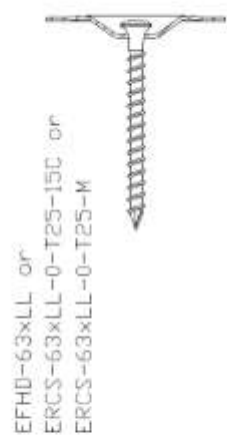

DVP-EF-5010N or EPM-50N-6,3-1.0

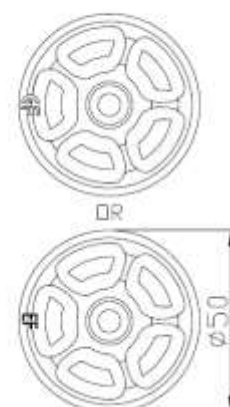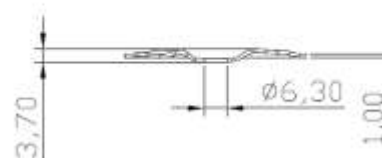
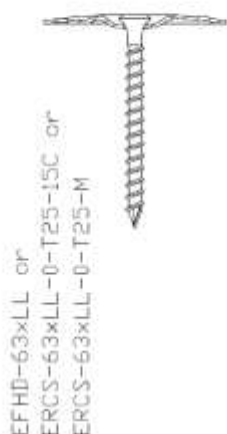


Eurofast Flat Roof Fasteners



EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)

Annex N.9
of European
Technical Assessment
ETA-23/0651

DVP-DF-7070D or EPM-7070D-7,0-1,0

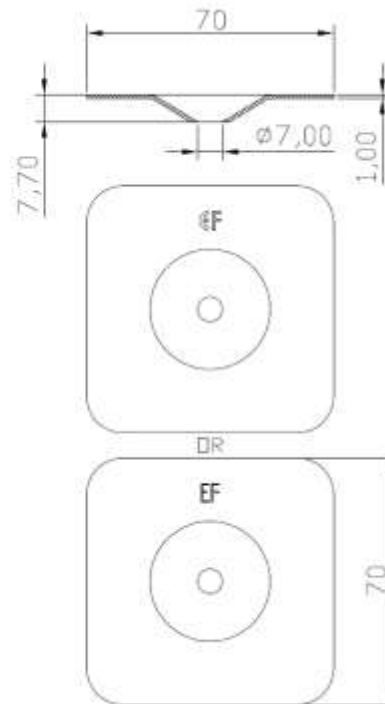EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M

DVP-EF-7007D or EPM-70D-6,0-0,7


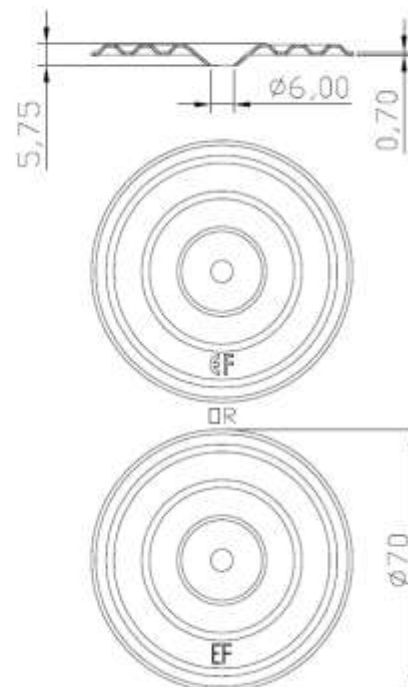
EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M

Eurofast Flat Roof Fasteners



EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)

Annex N.10
of European
Technical Assessment
ETA-23/0651

DVP-EF-7010D or EPM-70D-6.5-1.0

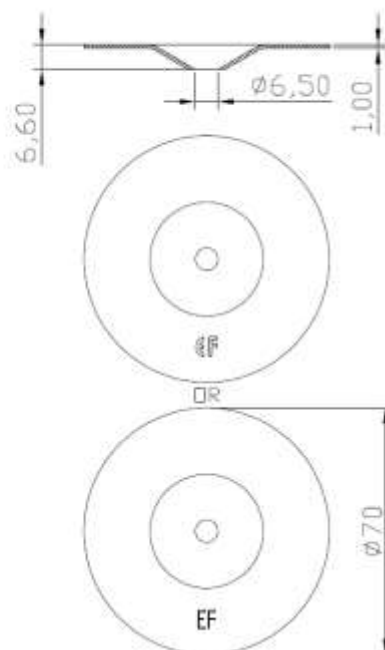
EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M


DVP-EF-7007H or EPM-70H-6.0-0.7


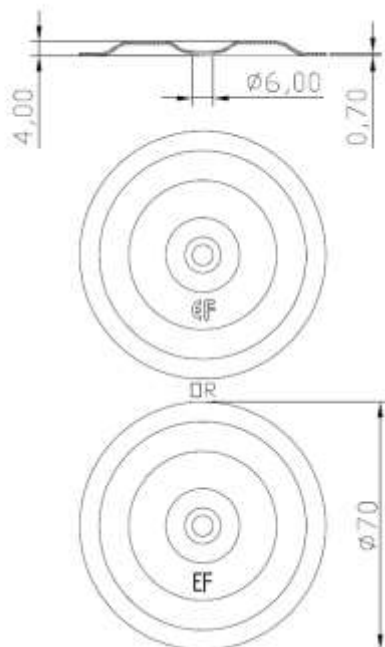

EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M


Eurofast Flat Roof Fasteners


EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)

Annex N.11
of European
Technical Assessment
ETA-23/0651

DVP-EF-7007N or EPM-70N-6,0-0.7

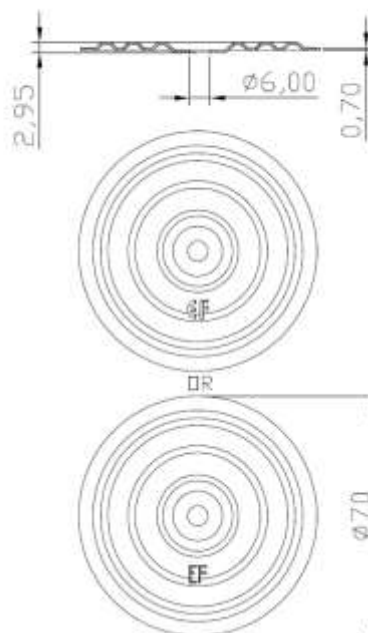EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M

DVP-EF-7010N or EPM-70N-6,5-1.0



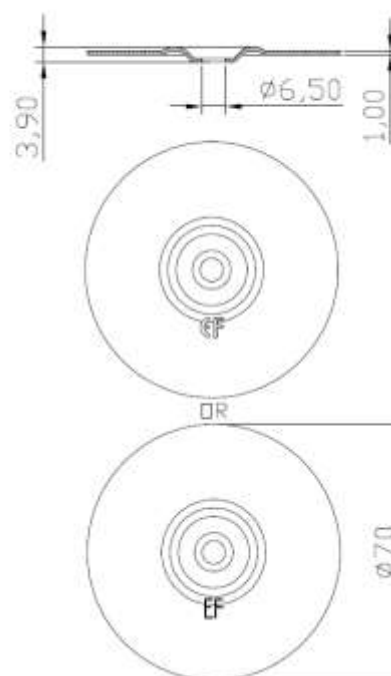
EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M

Eurofast Flat Roof Fasteners


EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)

Annex N.12
of European
Technical Assessment
ETA-23/0651




DVP-EF-8040D or EPM-8040D-6,5-1,0

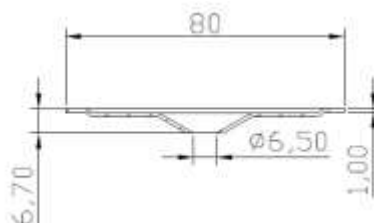
EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M



DR



DVP-EF-8040N or EPM-8040N-6,5-1,0

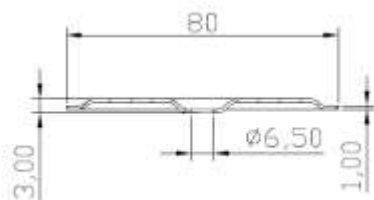
EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M


DR












Eurofast Flat Roof Fasteners



EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)

Annex N.13


of European
Technical Assessment
ETA-23/0651

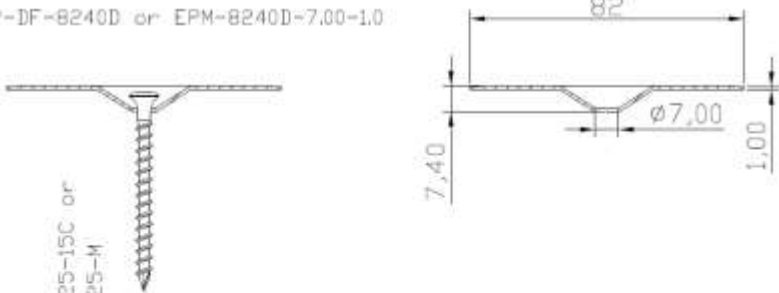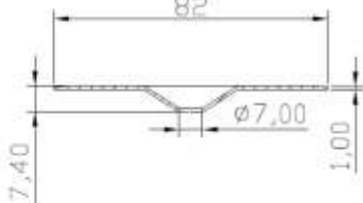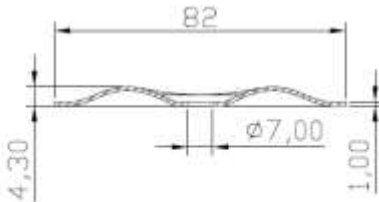DVP-DF-8240D or EPM-8240D-7,00-1,0  EFHD-63xLL or ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M  DR  40	
DVP-DF-8240H or EPM-8240H-7,0-1,0  EFHD-63xLL or ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M  DR  40	
Eurofast Flat Roof Fasteners	Annex N.14 of European Technical Assessment ETA-23/0651
EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)	

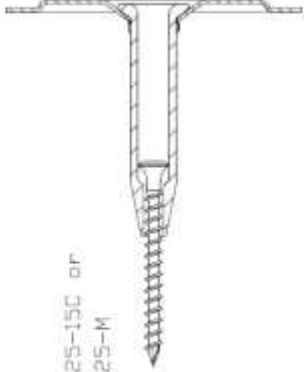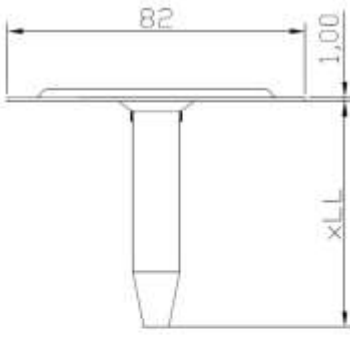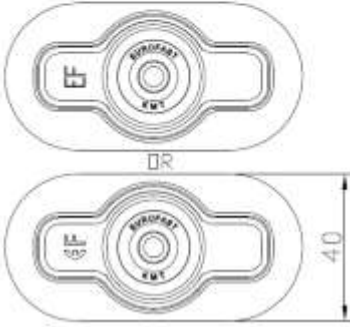
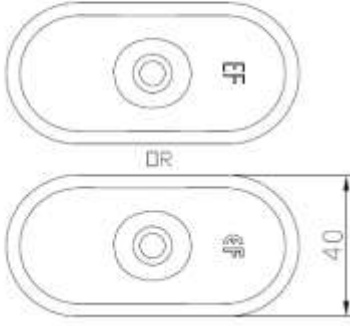
DVP-KMT-8240 + KMT-15xLL or EPM-T-8240N-13.6-1,0 + EPT-15xLL-PA  EFHD-63xLL or ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M   	
DVP-DF-8240XH or EPM-8240XH-7.0-1,0  EFHD-63xLL or ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M   	
Eurofast Flat Roof Fasteners	Annex N.15 of European Technical Assessment ETA-23/0651
EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)	

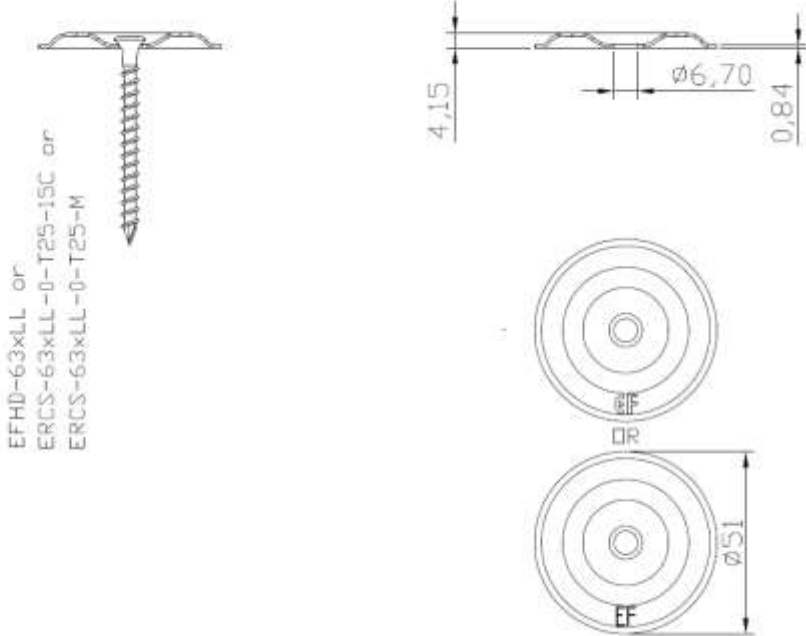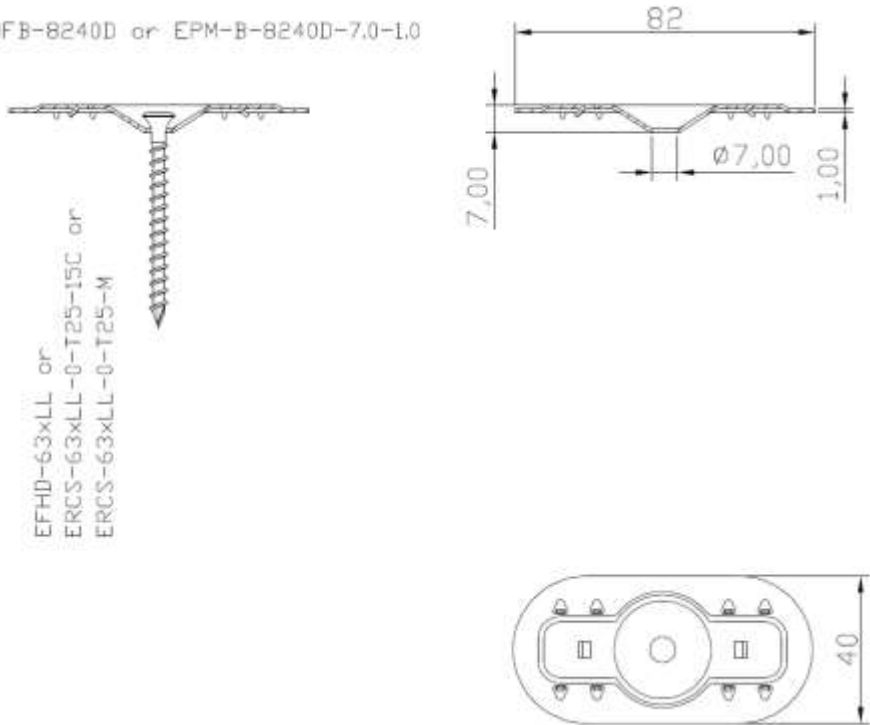DVP-EF-51N or EPM-51N-6.7-0.84  EFHD-63xLL or ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M	
DVP-DFB-8240D or EPM-B-8240D-7.0-1.0  EFHD-63xLL or ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M	
Eurofast Flat Roof Fasteners	Annex N.16 of European Technical Assessment ETA-23/0651
EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)	


EPM-T-IP-80-13,6-0,8 + KMT-15xLL or
EPM-T-IP-80-13,6-0,8 + EPT-15xLL-PA

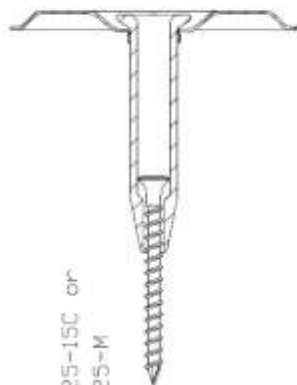



EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M

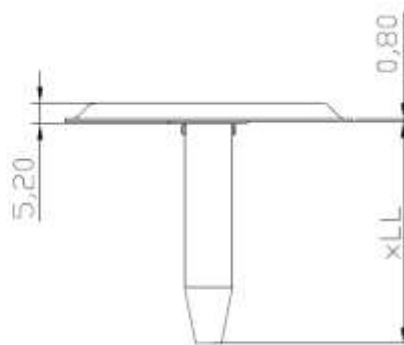

EPM-IP-80-6,8-0,8





EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M

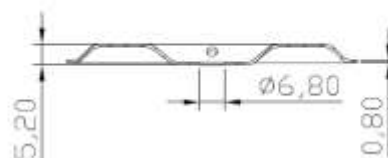


Eurofast Flat Roof Fasteners

EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)



Annex N.17
of European
Technical Assessment
ETA-23/0651

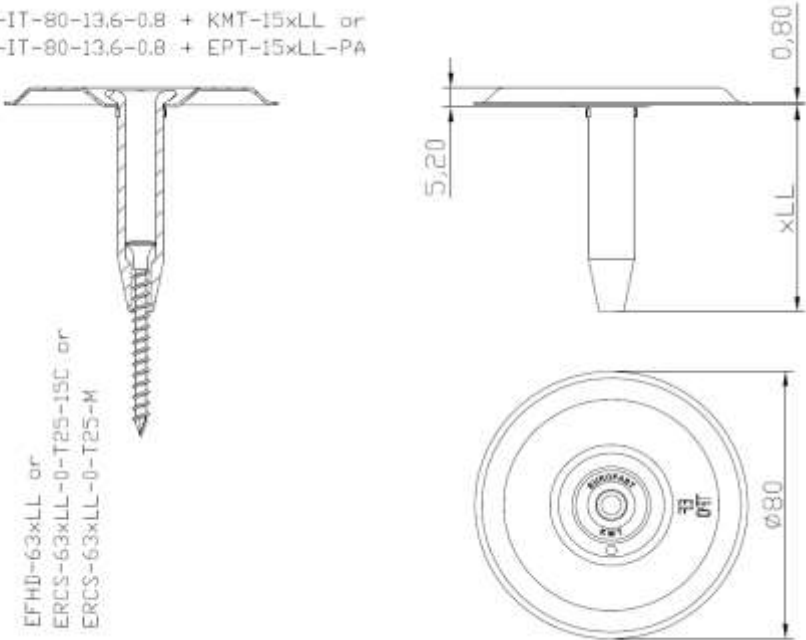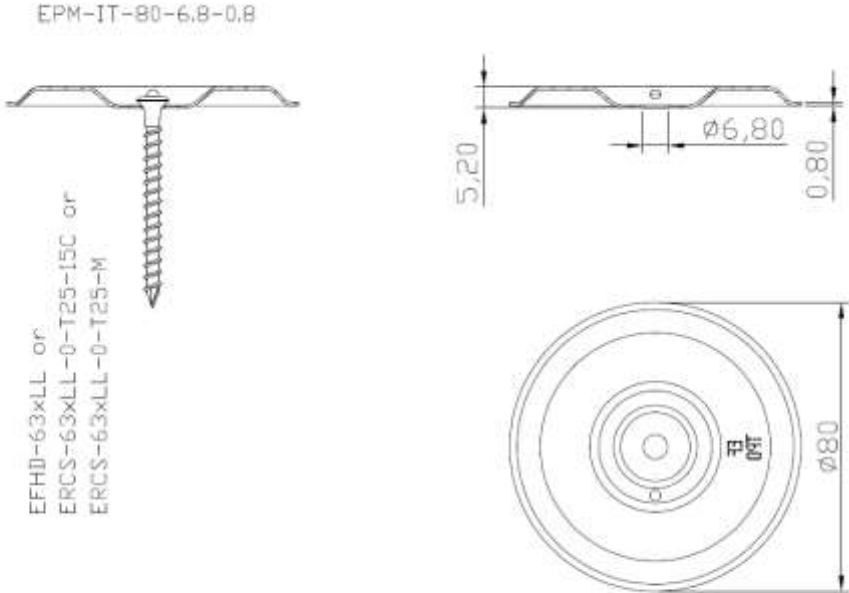EPM-T-IT-80-13,6-0,8 + KMT-15xLL or EPM-T-IT-80-13,6-0,8 + EPT-15xLL-PA  EFHD-63xLL or ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M 	
Eurofast Flat Roof Fasteners	Annex N.18 of European Technical Assessment ETA-23/0651
EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)	


EPM-T-IE-80-13,6-0,8 + KMT-15xLL or
EPM-T-IE-80-13,6-0,8 + EPT-15xLL-PA

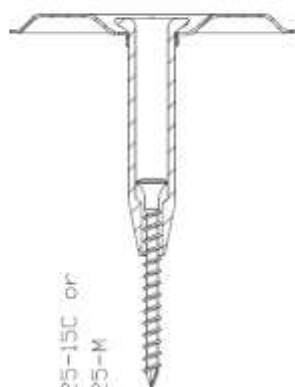



EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M

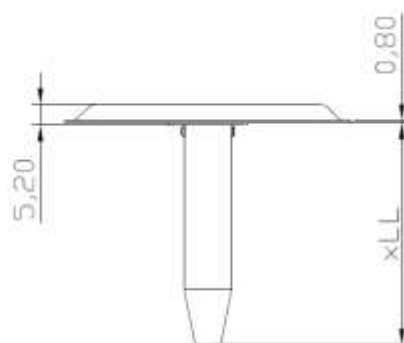

EPM-IE-80-6,8-0,8



EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M

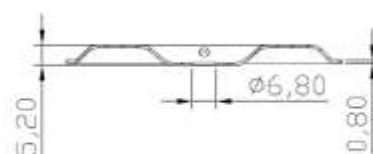


Eurofast Flat Roof Fasteners


EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)

Annex N.19
of European
Technical Assessment
ETA-23/0651


DVP-DL-70N + TLK-45xLL or
EPM-EDL-70N-20-0.5 + EPT-45xLL-PP

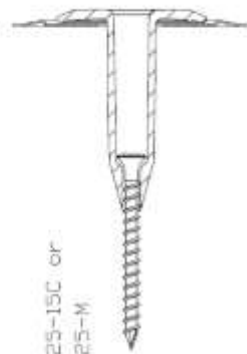


EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M

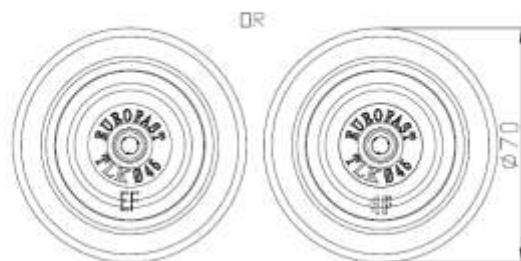

DVP-DL-70N + TRP-45xLL or
EPM-EDL-70N-20-0.5 + EPT-45xLL-PA

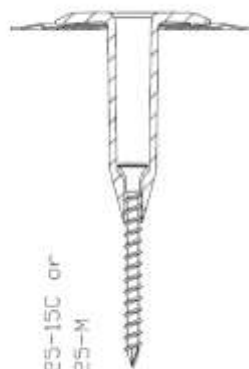

EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M

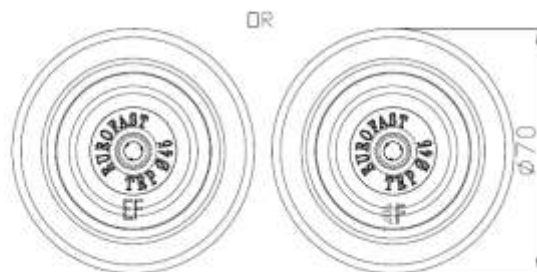


Eurofast Flat Roof Fasteners


EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)

Annex N.20
of European
Technical Assessment
ETA-23/0651

KS-EPM-8240XH-6.0-1.0

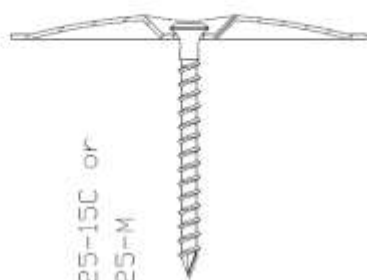

EFHD-63xLL or
ERCS-63xLL-0-T25-15C or
ERCS-63xLL-0-T25-M

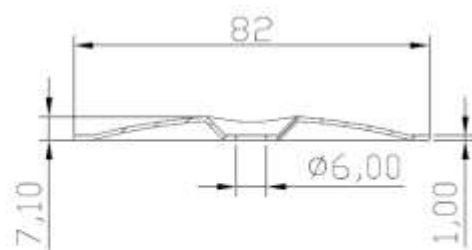


Eurofast Flat Roof Fasteners


EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)

Annex N.21
of European
Technical Assessment
ETA-23/0651

EBS-xxxxx-25-7.1-1.25 or
BC-EBS-xxxxx-25-7.1-1.25

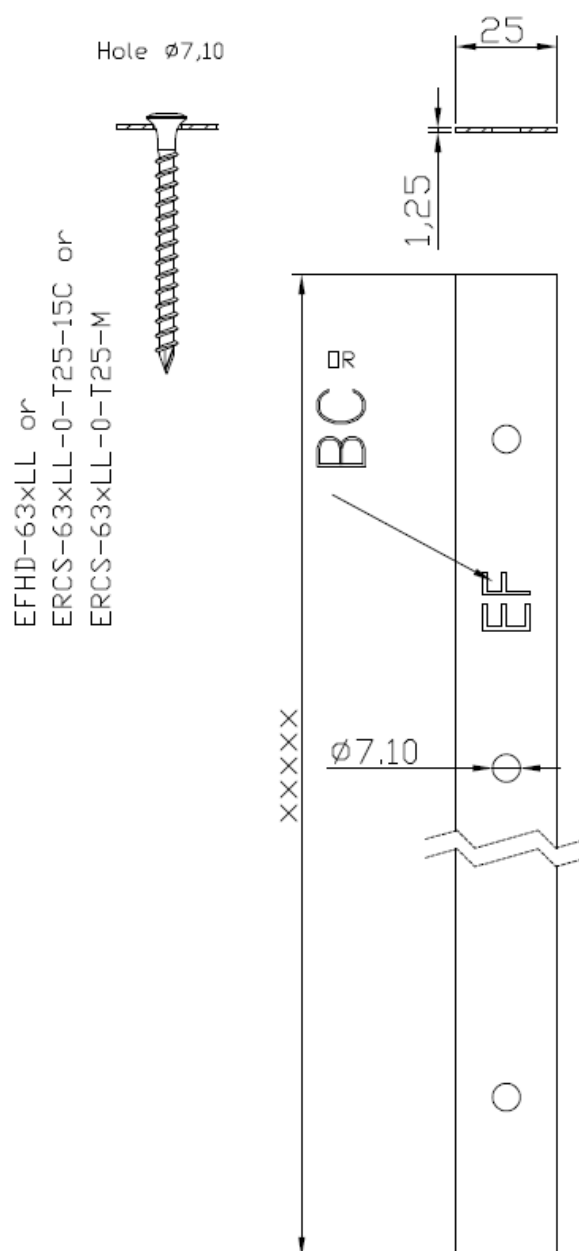

Eurofast Flat Roof Fasteners	Annex N.22
EFHD-63xLL (ERCS-63xLL-0-T25-15C or ERCS-63xLL-0-T25-M)	of European Technical Assessment ETA-23/0651

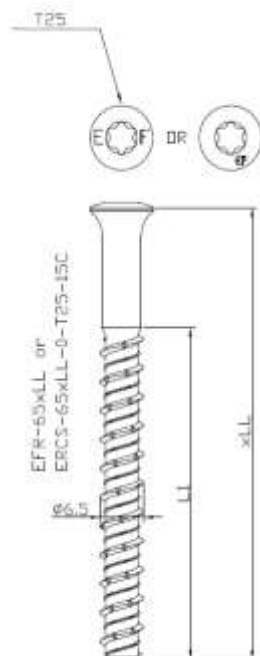

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)				
	Concrete C12/15 (drill 5,0 mm)	Concrete C20/25 (drill 5,2 mm)*	Concrete C20/25 (drill 5,5 mm)**	Concrete C25/30 (drill 5,5 mm)**
EFR-65xLL (ERCS-65xLL-0-T25-15C)	3,91	5,05	4,04	4,42

* value also valid for holes drilled with 5,0 mm drill

** value also valid for holes drilled with 5,2 mm or 5,0 mm drill

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)		
	DVP-EF-51N (EPM-51N-6.7-0.84)	EPM-IP-80-6.8-0.8
	-	EPM-IT-80-6.8-0.8
	-	EPM-IE-80-6.8-0.8
EFR-65xLL (ERCS-65xLL-0-T25-15C)	2,93	2,92

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

EFR-65xLL (ERCS-65xLL-0-T25-15C)

Annex O.1

of European
Technical Assessment
ETA-23/0651

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	-	TLK-45xLL (EPT-45xLL-PP)	HTLK-45xLL (EPT-O-45xLL-PP)
	TRP-45xLL (EPT-45xLL-PA)	TLK-75xLL (EPT-75xLL-PP)	-
	BTRP-45xLL (EPT-B-45xLL-PA)	DVP-DL-70N + TLK-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)	-
	TWP-8040xLL (EPT-8040xLL-PA)	-	-
	EDF-BAR F-TUBE + KMT-15xLL (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)	-	-
	DVP-KMT-8240 + KMT-15xLL (EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)	-	-
	EPM-T-IP-80-13.6-0.8 + KMT-15xLL (EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IT-80-13.6-0.8 + KMT-15xLL (EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IE-80-13.6-0.8 + KMT-15xLL (EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	DVP-DL-70N + TRP-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)	-	-
EFR-65xLL (ERCS-65xLL-0-T25-15C)	2,64	1,68	1,78

* "Pull-over" according to CEN/TS 17659:2021

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)					
	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)	DVP-EF-4010N (EPM-40N-6.0-1.0)	DVP-EF-5010D (EPM-50D-6.3-1.0)	DVP-DF-7070D (EPM-7070D-7.0-1.0)	DVP-EF-7007D (EPM-70D-6.0-0.7)
	DVP-EF-7010D (EPM-70D-6.5-1.0)	KS-EPM-8240XH-6.0-1.0	DVP-EF-5010N (EPM-50N-6.3-1.0)	DVP-DF-8240D (EPM-8240D-7.0-1.0)	DVP-EF-7007H (EPM-70H-6.0-0.7)
	DVP-EF-7010N (EPM-70N-6.5-1.0)	-	-	DVP-DF-8240H (EPM-8240H-7.0-1.0)	DVP-EF-7007N (EPM-70N-6.0-0.7)
	DVP-EF-8040D (EPM-8040D-6.5-1.0)	-	-	DVP-DF-8240XH (EPM-8240XH-7.0-1.0)	-
	DVP-EF-8040N (EPM-8040N-6.5-1.0)	-	-	DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)	-
	-	-	-	EBS-xxxxx-25-7.1-1.25 (BC-EBS-xxxxx-25-7.1-1.25)	-
EFR-65xLL (ERCS-65xLL-0-T25-15C)	5,05	4,43	3,89	2,96	2,91

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

EFR-65xLL (ERCS-65xLL-0-T25-15C)

Annex O.2
of European
Technical Assessment
ETA-23/0651

Screw:

EFR-65xLL (ERCS-65xLL-0-T25-15C)

Metal pressure plate:

DVP-EF-4010N	(EPM-40N-6.0-1.0)	DVP-DF-8240XH	(EPM-8240XH-7.0-1.0)
DVP-EF-5010D	(EPM-50D-6.3-1.0)	DVP-EF-51N	(EPM-51N-6.7-0.84)
DVP-EF-5010N	(EPM-50N-6.3-1.0)	DVP-DFB-8240D	(EPM-B-8240D-7.0-1.0)
DVP-DF-7070D	(EPM-7070D-7.0-1.0)	EPM-IP-80-6.8-0.8	
DVP-EF-7007D	(EPM-70D-6.0-0.7)	EPM-IT-80-6.8-0.8	
DVP-EF-7010D	(EPM-70D-6.5-1.0)	EPM-IE-80-6.8-0.8	
DVP-EF-7007H	(EPM-70H-6.0-0.7)	DVP-KMT-8240 + KMT-15xLL	(EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)
DVP-EF-7007N	(EPM-70N-6.0-0.7)	EPM-T-IP-80-13.6-0.8 + KMT-15xLL	(EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-7010N	(EPM-70N-6.5-1.0)	EPM-T-IT-80-13.6-0.8 + KMT-15xLL	(EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8040D	(EPM-8040D-6.5-1.0)	EPM-T-IE-80-13.6-0.8 + KMT-15xLL	(EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)
DVP-EF-8040N	(EPM-8040N-6.5-1.0)	DVP-DL-70N + TRP-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)
DVP-DF-8240D	(EPM-8240D-7.0-1.0)	DVP-DL-70N + TLK-45xLL	(EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)
DVP-DF-8240H	(EPM-8240H-7.0-1.0)	KS-EPM-8240XH-6.0-1.0	

Pressure plate with tube:

TRP-45xLL	(EPT-45xLL-PA)
BTRP-45xLL	(EPT-B-45xLL-PA)
TWP-8040xLL	(EPT-8040xLL-PA)
TLK-45xLL	(EPT-45xLL-PP)
HTLK-45xLL	(EPT-O-45xLL-PP)
TLK-75xLL	(EPT-75xLL-PP)

Termination bar:

EDF-BAR F-TUBE	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)
EDF-BAR F-TUBE + KMT-15xLL	(ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)
EBS-xxxxx-25-7.1-1.25	(BC-EBS-xxxxx-25-7.1-1.25)

Substrate:

Concrete C12/15, C20/25, C25/30 EN 206

Installation data:

Head type:	Raised Bugle Head
Recess:	TX25
Effective anchoring depth h_{ef} :	≥ 25 mm
Drill diameter in concrete C12/15:	5,0 mm
Drill diameter in concrete C20/25:	5,2 or 5,5 mm
Drill diameter in concrete C25/30:	5,5 mm
Drilled hole depth:	$h_{ef} + 10$ mm
Installation force of installation tool:	15 kg + impact
Installation tool speed:	100 rpm


Eurofast Flat Roof Fasteners

EFR-65xLL (ERCS-65xLL-0-T25-15C)


Annex O.3

of European
Technical Assessment
ETA-23/0651

TRP-45xLL or EPT-45xLL-PA

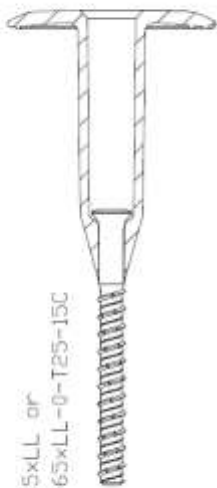





EFR-65xLL or
ERCS-65xLL-0-T25-15C

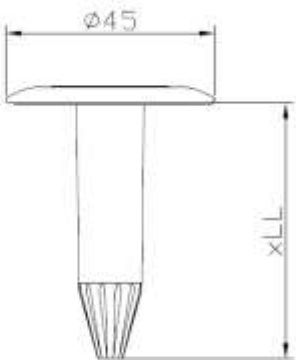


Eurofast Flat Roof Fasteners

EFR-65xLL (ERCS-65xLL-0-T25-15C)


Annex O.4
of European
Technical Assessment
ETA-23/0651

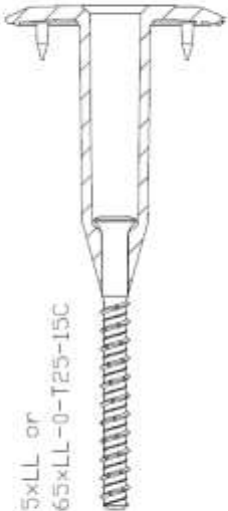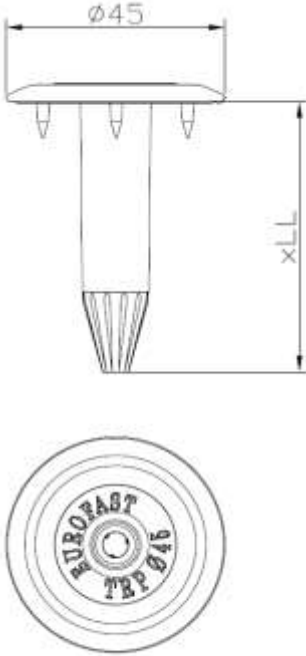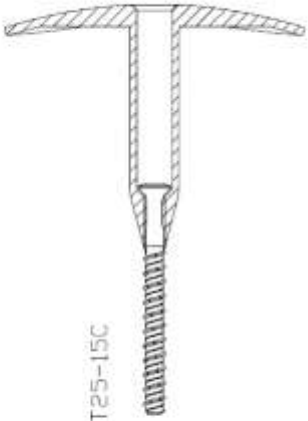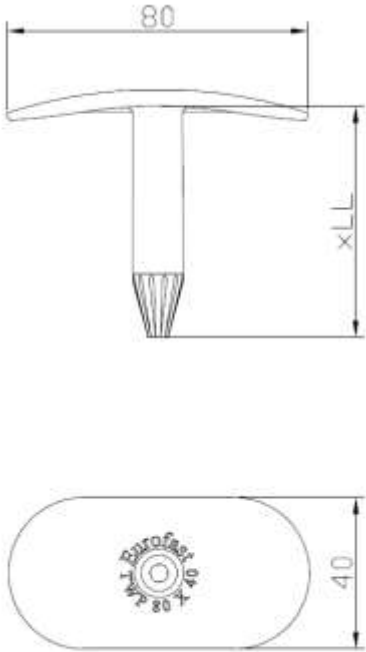BTRP-45xLL or EPT-B-45xLL-PA  EFR-65xLL or ERCS-65xLL-0-T25-15C	
TWP-8040xLL or EPT-8040xLL-PA  EFR-65xLL or ERCS-65xLL-0-T25-15C	
Eurofast Flat Roof Fasteners	Annex O.5 of European Technical Assessment ETA-23/0651
EFR-65xLL (ERCS-65xLL-0-T25-15C)	

EDF-BAR-F-TUBE + KMT-15xLL or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0
+ EPT-15xLL-PA

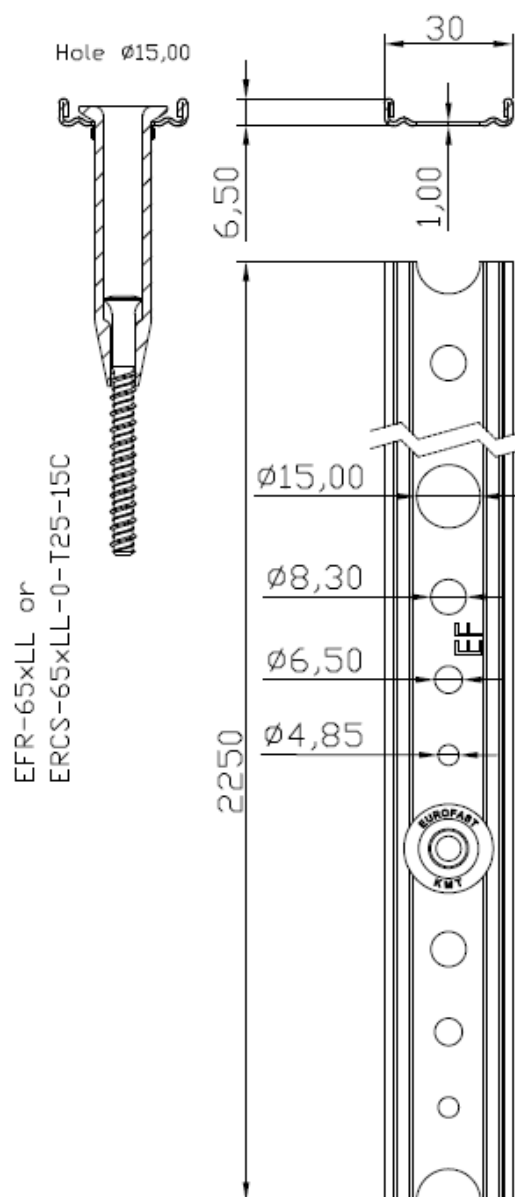

EDF-BAR-F-TUBE or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0

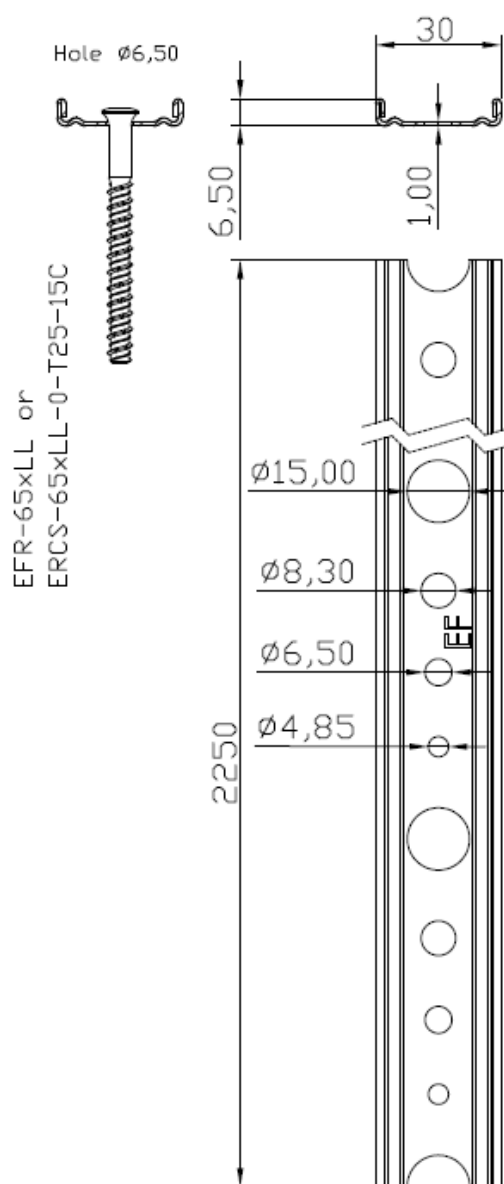



Eurofast Flat Roof Fasteners

EFR-65xLL (ERCS-65xLL-0-T25-15C)



Annex O.6

of European
Technical Assessment
ETA-23/0651

TLK-45xLL or EPT-45xLL-PP

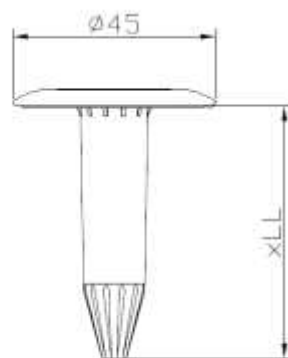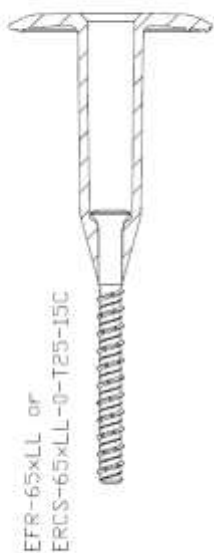
EFR-65xLL or
ERCS-65xLL-0-T25-15C

HTLK-45xLL or EPT-D-45xLL-PP

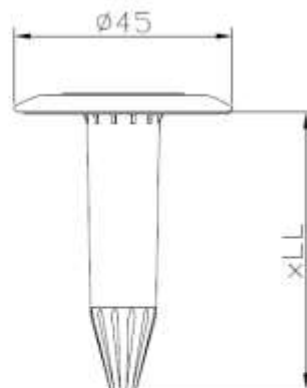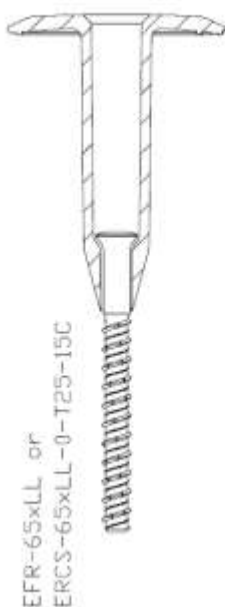
EFR-65xLL or
ERCS-65xLL-0-T25-15C



Eurofast Flat Roof Fasteners

EFR-65xLL (ERCS-65xLL-0-T25-15C)




Annex O.7

of European
Technical Assessment
ETA-23/0651

TLK-75xLL or EPT-75xLL-PP

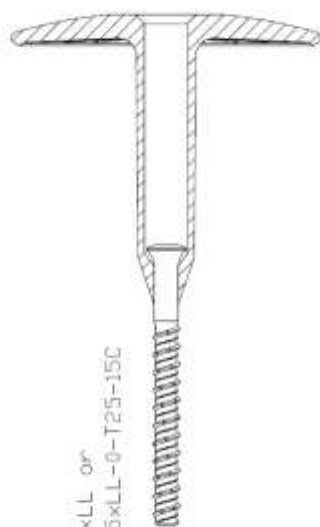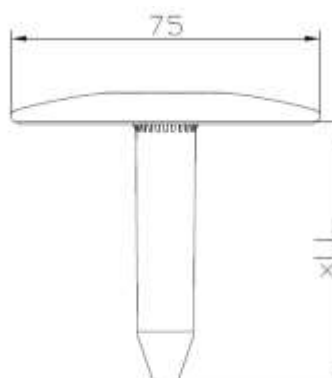EFR-65xLL or
ERCS-65xLL-0-T25-15C



DVP-EF-4010N or EPM-40N-6.0-1.0

EFR-65xLL or
ERCS-65xLL-0-T25-15C



Eurofast Flat Roof Fasteners

EFR-65xLL (ERCS-65xLL-0-T25-15C)



Annex O.8
of European
Technical Assessment
ETA-23/0651

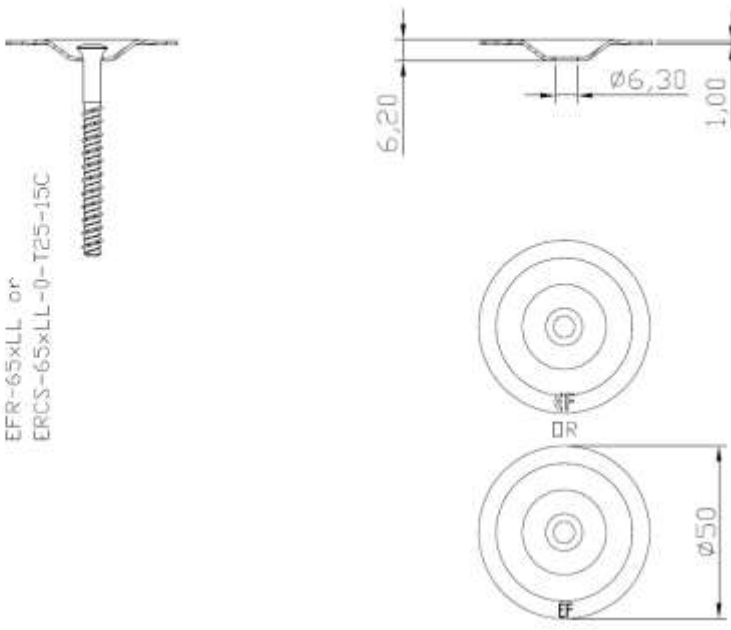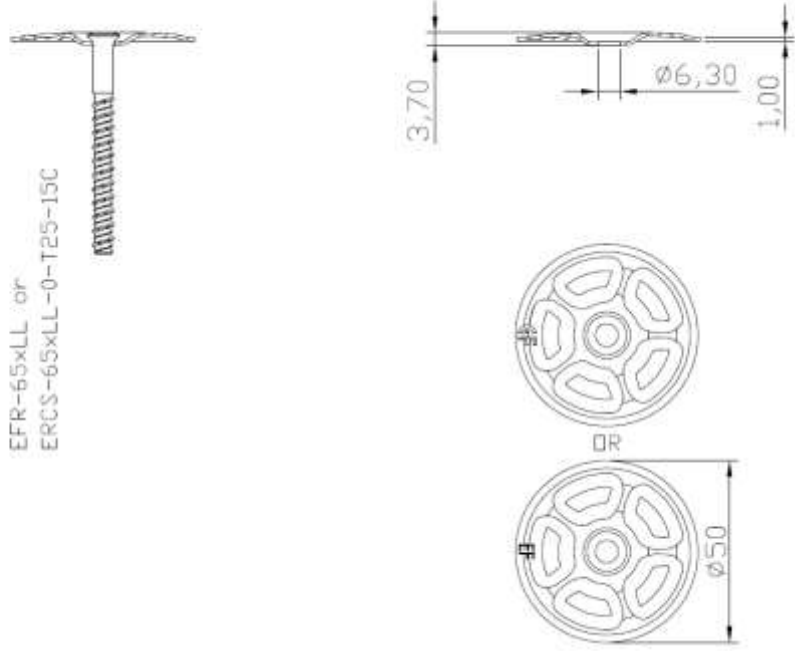DVP-EF-5010D or EPM-50D-6.3-1.0  EF-65xLL or ERCS-65xLL-0-T25-15C	
DVP-EF-5010N or EPM-50N-6.3-1.0  EF-65xLL or ERCS-65xLL-0-T25-15C	
Eurofast Flat Roof Fasteners	Annex O.9 of European Technical Assessment ETA-23/0651
EFR-65xLL (ERCS-65xLL-0-T25-15C)	

DVP-DF-7070D or EPM-7070D-7,0-1,0

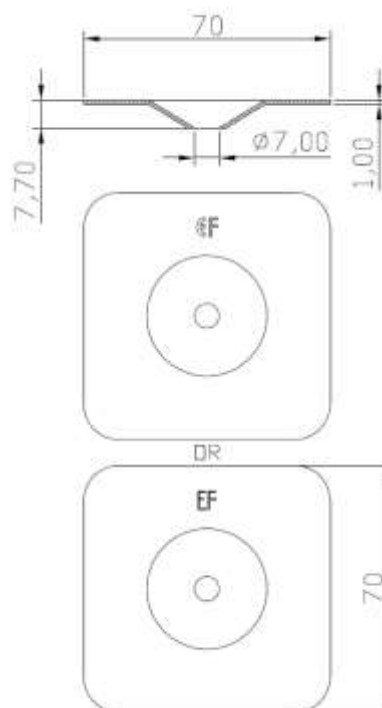EFR-65xLL or
ERCS-65xLL-0-T25-15C

DVP-EF-7007D or EPM-70D-6,0-0,7


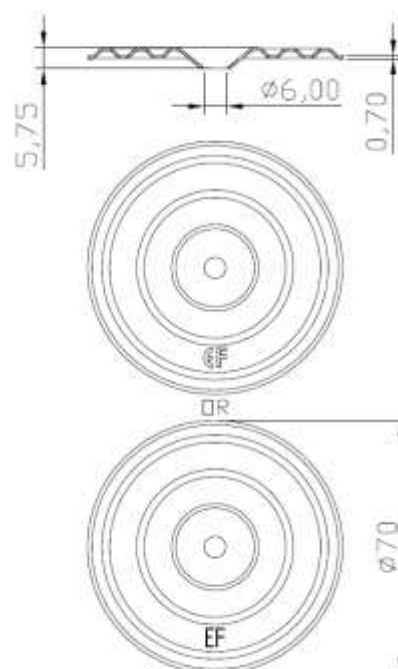
EFR-65xLL or
ERCS-65xLL-0-T25-15C

Eurofast Flat Roof Fasteners



EFR-65xLL (ERCS-65xLL-0-T25-15C)

Annex O.10
of European
Technical Assessment
ETA-23/0651

DVP-EF-7010D or EPM-70D-6.5-1.0

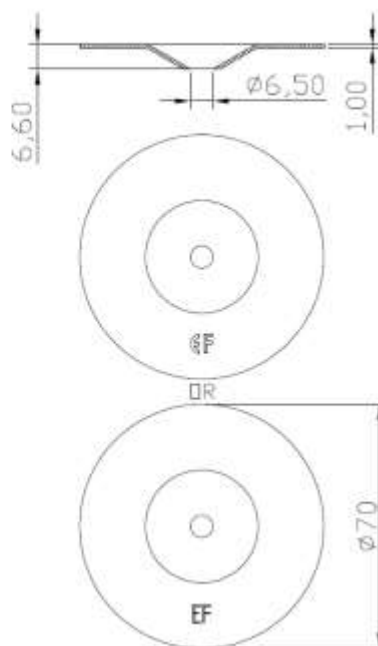
EFR-65xLL or
ERCS-65xLL-0-T25-15C


DVP-EF-7007H or EPM-70H-6.0-0.7



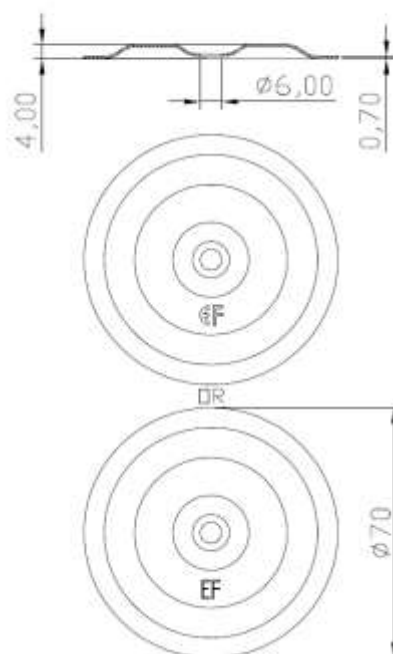

EFR-65xLL or
ERCS-65xLL-0-T25-15C


Eurofast Flat Roof Fasteners


EFR-65xLL (ERCS-65xLL-0-T25-15C)

Annex O.11
of European
Technical Assessment
ETA-23/0651

DVP-EF-7007N or EPM-70N-6.0-0.7


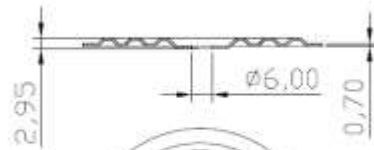
EFR-65xLL or
ERCS-65xLL-0-T25-15C

DR




EF

DVP-EF-7010N or EPM-70N-6.5-1.0

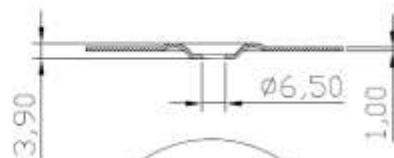EFR-65xLL or
ERCS-65xLL-0-T25-15C

DR






EF

Eurofast Flat Roof Fasteners


EFR-65xLL (ERCS-65xLL-0-T25-15C)

Annex O.12
of European
Technical Assessment
ETA-23/0651




DVP-EF-8040D or EPM-8040D-6.5-1.0

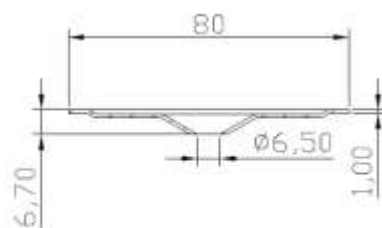
EFR-65xLL or
ERCS-65xLL-0-T25-15C



DR



DVP-EF-8040N or EPM-8040N-6.5-1.0

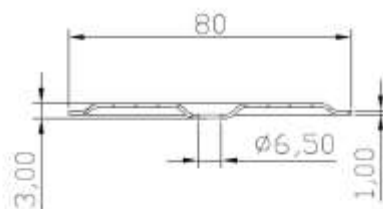
EFR-65xLL or
ERCS-65xLL-0-T25-15C


DR






Eurofast Flat Roof Fasteners

EFR-65xLL (ERCS-65xLL-0-T25-15C)


Annex O.13

of European
Technical Assessment
ETA-23/0651

DVP-DF-8240D or EPM-8240D-7.00-1.0

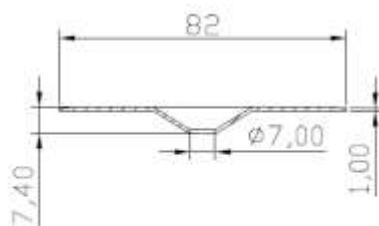
EFR-65xLL or
ERCS-65xLL-0-T25-15C

DR




40

DVP-DF-8240H or EPM-8240H-7.0-1.0

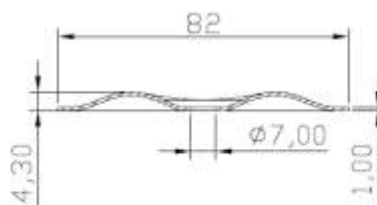EFR-65xLL or
ERCS-65xLL-0-T25-15C

DR




40

Eurofast Flat Roof Fasteners




EFR-65xLL (ERCS-65xLL-0-T25-15C)

Annex O.14
of European
Technical Assessment
ETA-23/0651


DVP-KMT-8240 + KMT-15xLL or
EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA

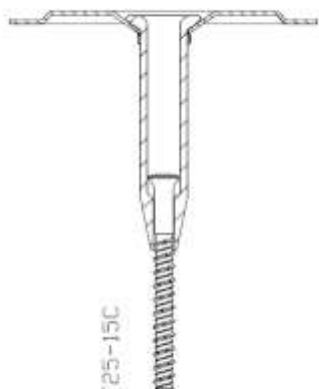



EFR-65xLL or
ERCS-65xLL-0-T25-15C

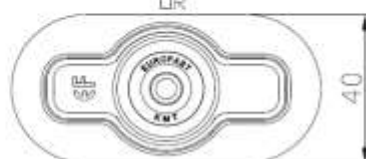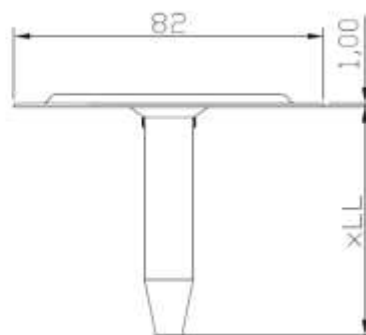

DVP-DF-8240XH or EPM-8240XH-7.0-1.0



EFR-65xLL or
ERCS-65xLL-0-T25-15C



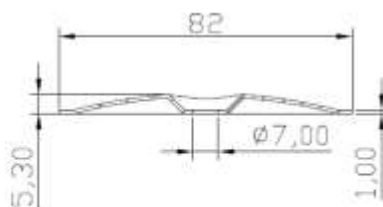


Eurofast Flat Roof Fasteners




EFR-65xLL (ERCS-65xLL-0-T25-15C)

Annex O.15
of European
Technical Assessment
ETA-23/0651

DVP-EF-51N or EPM-51N-6.7-0.84

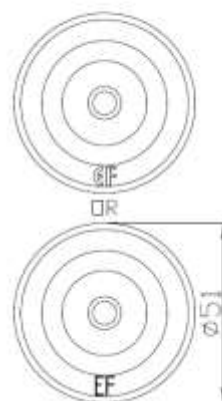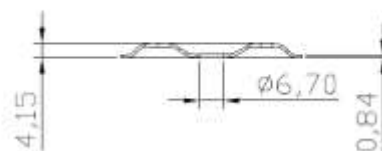EFR-65xLL or
ERCS-65xLL-0-T25-15C

DVP-DFB-8240D or EPM-B-8240D-7.0-1.0

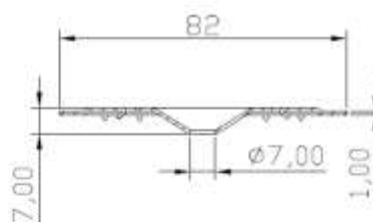
EFR-65xLL or
ERCS-65xLL-0-T25-15C

Eurofast Flat Roof Fasteners



EFR-65xLL (ERCS-65xLL-0-T25-15C)

Annex O.16
of European
Technical Assessment
ETA-23/0651


EPM-T-IP-80-13,6-0,8 + KMT-15xLL or
EPM-T-IP-80-13,6-0,8 + EPT-15xLL-PA

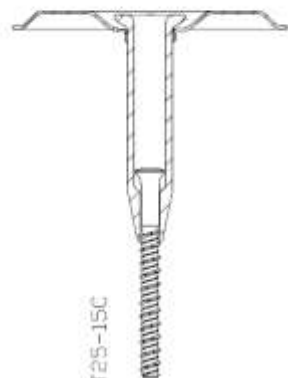



EFR-65xLL or
ERCS-65xLL-0-T25-15C

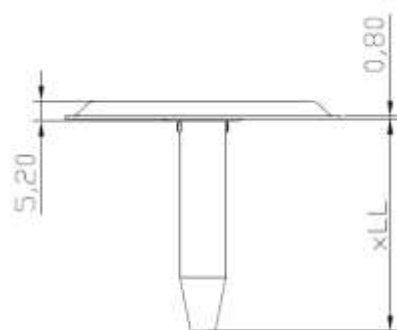

EPM-IP-80-6,8-0,8



EFR-65xLL or
ERCS-65xLL-0-T25-15C

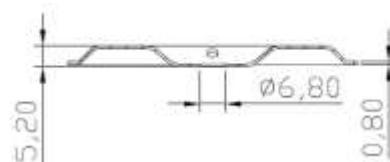


Eurofast Flat Roof Fasteners



EFR-65xLL (ERCS-65xLL-0-T25-15C)

Annex O.17
of European
Technical Assessment
ETA-23/0651


EPM-T-IT-80-13.6-0.8 + KMT-15xLL or
EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA

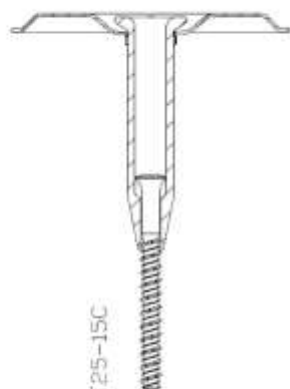



EFB-65xLL or
ERCS-65xLL-0-T25-15C

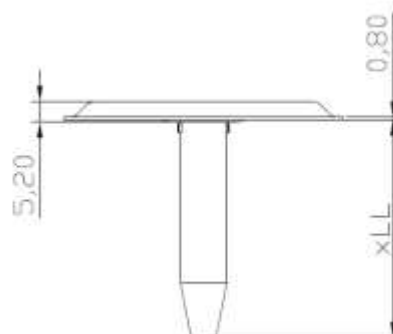

EPM-IT-80-6.8-0.8



EFR-65xLL or
ERCS-65xLL-0-T25-15C

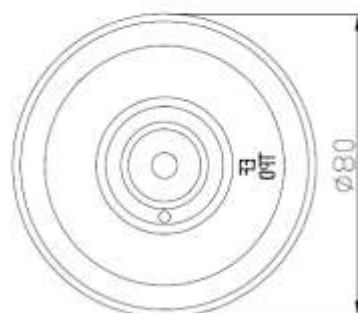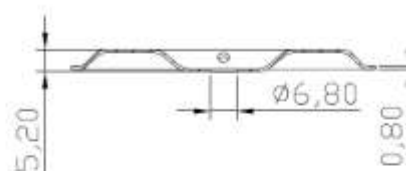


Eurofast Flat Roof Fasteners

EFR-65xLL (ERCS-65xLL-0-T25-15C)



Annex O.18

of European
Technical Assessment
ETA-23/0651


EPM-T-IE-80-13.6-0.8 + KMT-15xLL or
EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA

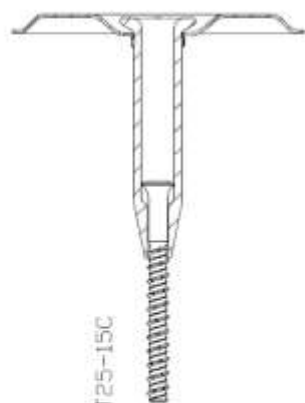



EFR-65xLL or
ERCS-65xLL-0-T25-15C

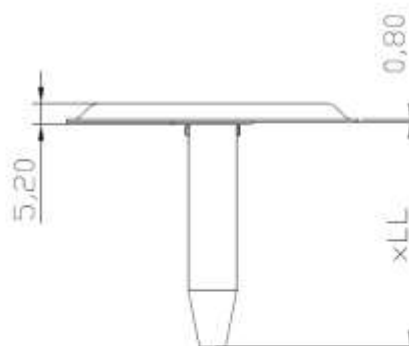

EPM-IE-80-6.8-0.8



EFR-65xLL or
ERCS-65xLL-0-T25-15C

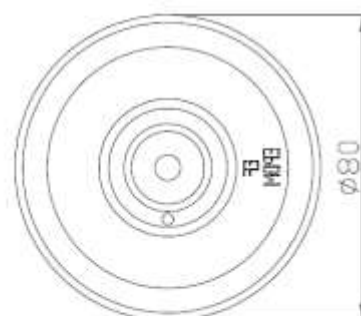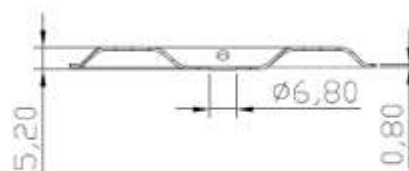


Eurofast Flat Roof Fasteners

EFR-65xLL (ERCS-65xLL-0-T25-15C)



Annex O.19

of European
Technical Assessment
ETA-23/0651


DVP-DL-70N + TLK-45xLL or
EPM-EDL-70N-20-0,5 + EPT-45xLL-PP

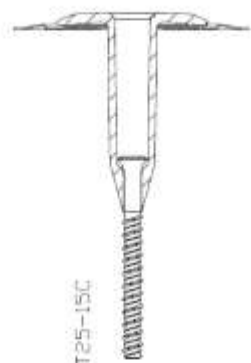



EFR-65xLL or
ERCS-65xLL-0-T25-15C

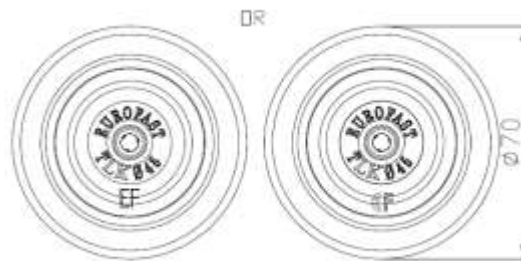

DVP-DL-70N + TRP-45xLL or
EPM-EDL-70N-20-0,5 + EPT-45xLL-PA

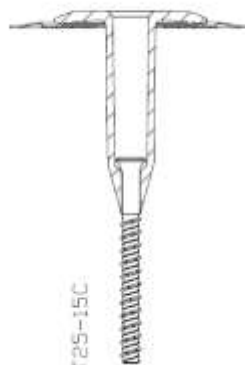

EFR-65xLL or
ERCS-65xLL-0-T25-15C

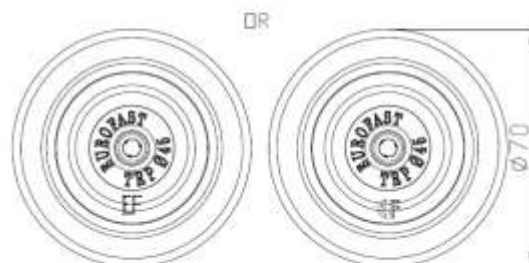



Eurofast Flat Roof Fasteners

EFR-65xLL (ERCS-65xLL-0-T25-15C)

Annex O.20
of European
Technical Assessment
ETA-23/0651

KS-EPM-8240XH-6.0-1.0

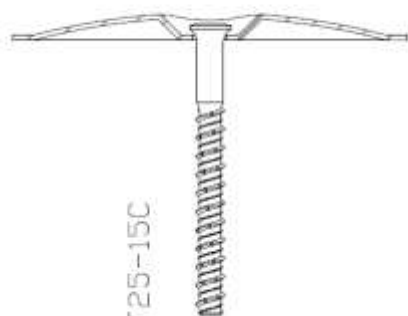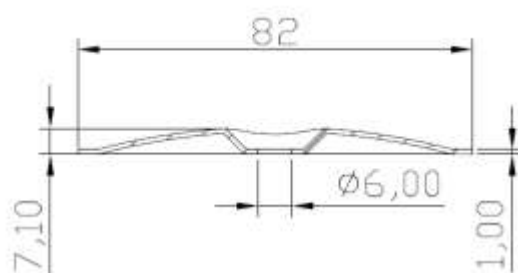

EFR-65xLL or
ERCS-65xLL-0-T25-15C


Eurofast Flat Roof Fasteners

EFR-65xLL (ERCS-65xLL-0-T25-15C)

Annex O.21
of European
Technical Assessment
ETA-23/0651


EBS-xxxxx-25-7.1-1.25 or
BC-EBS-xxxxx-25-7.1-1.25

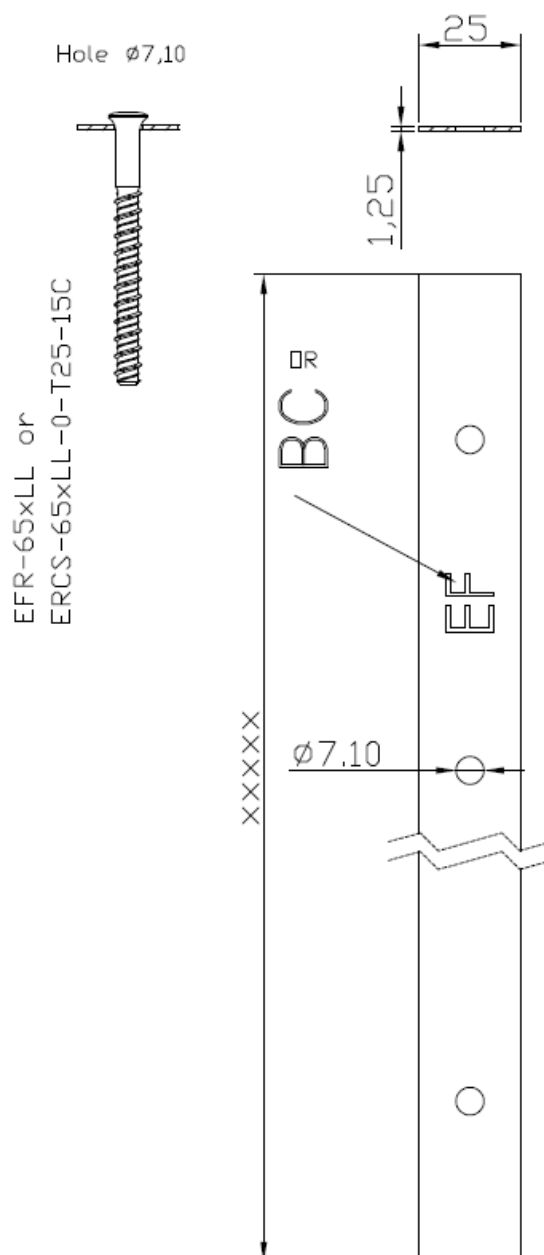

Eurofast Flat Roof Fasteners

EFR-65xLL (ERCS-65xLL-0-T25-15C)

Annex O.22
of European
Technical Assessment
ETA-23/0651

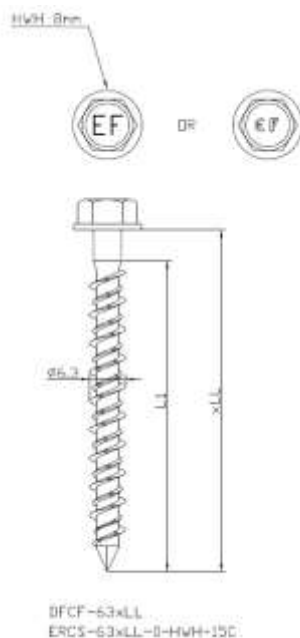

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)				
	Concrete C12/15 (drill 5,0 mm)	Concrete C20/25 (drill 5,2 mm)*	Concrete C20/25 (drill 5,5 mm)**	Concrete C25/30 (drill 5,5 mm)**
DFCF-63xLL (ERCS-63xLL-0-HWH-15C)	3,76	4,85	3,67	4,02

* value also valid for holes drilled with 5,0 mm drill

** value also valid for holes drilled with 5,2 mm or 5,0 mm drill

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)					
	EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)	DVP-EF-5010D (EPM-50D-6.3-1.0)	DVP-EF-7007D (EPM-70D-6.0-0.7)	DVP-DF-7070D (EPM-7070D-7.0-1.0)
	EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)	DVP-EF-7010D (EPM-70D-6.5-1.0)	-	-	DVP-DF-8240D (EPM-8240D-7.0-1.0)
	-	DVP-EF-8040D (EPM-8040D-6.5-1.0)	-	-	DVP-DF-8240XH (EPM-8240XH-7.0-1.0)
	-	-	-	-	DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)
DFCF-63xLL (ERCS-63xLL-0-HWH-15C)	5,12	5,05	6,86	5,36	5,25

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

DFCF-63xLL (ERCS-63xLL-0-HWH-15C)

Annex P.1
of European
Technical Assessment
ETA-23/0651

Screw:

DFCF-63xLL (ERCS-63xLL-0-HWH-15C)

Metal pressure plate:

DVP-EF-5010D (EPM-50D-6.3-1.0)
 DVP-DF-7070D (EPM-7070D-7.0-1.0)
 DVP-EF-7007D (EPM-70D-6.0-0.7)
 DVP-EF-7010D (EPM-70D-6.5-1.0)
 DVP-EF-8040D (EPM-8040D-6.5-1.0)
 DVP-DF-8240D (EPM-8240D-7.0-1.0)
 DVP-DF-8240XH (EPM-8240XH-7.0-1.0)
 DVP-DFB-8240D (EPM-B-8240D-7.0-1.0)

Termination bar:

EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)
 EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)
 EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)

Substrate:

Concrete C12/15, C20/25, C25/30 EN 206

Installation data:

Head type: Hex Washer Head 8 mm
 Effective anchoring depth h_{ef} : ≥ 25 mm
 Drill diameter in concrete C12/15: 5,0 mm
 Drill diameter in concrete C20/25: 5,2 or 5,5 mm
 Drill diameter in concrete C25/30: 5,5 mm
 Drilled hole depth: $h_{ef} + 10$ mm
 Installation force of installation tool: 15 kg + impact
 Installation tool speed: 100 rpm


Eurofast Flat Roof Fasteners

DFCF-63xLL (ERCS-63xLL-0-HWH-15C)

Annex P.2
 of European
 Technical Assessment
 ETA-23/0651

EDF-BAR F or ETM-2250-30-4.8-8.5-1.0 The drawing shows a side view of a metal profile with a fastener. The fastener has a hole diameter of $\varnothing 8,50$. The profile has a total width of 30, a top flange height of 6,00, and a bottom flange height of 1,00. A detailed view of the fastener shows it is a DFCF-63xLL (ERCS-63xLL-0-HWH-15C) with a length of 2250. The fastener is shown inserted into the profile, with the hole diameter $\varnothing 8,50$ and the profile width 30 indicated. The fastener is labeled DFCF-63xLL (ERCS-63xLL-0-HWH-15C).	EDF-BAR FB or ETM-B-2250-30-4.8-8.5-1.0 The drawing shows a side view of a metal profile with a fastener. The fastener has a hole diameter of $\varnothing 8,50$. The profile has a total width of 30, a top flange height of 6,00, and a bottom flange height of 1,00. A detailed view of the fastener shows it is a DFCF-63xLL (ERCS-63xLL-0-HWH-15C) with a length of 2250. The fastener is shown inserted into the profile, with the hole diameter $\varnothing 8,50$ and the profile width 30 indicated. The fastener is labeled DFCF-63xLL (ERCS-63xLL-0-HWH-15C).
Eurofast Flat Roof Fasteners	Annex P.3 of European Technical Assessment ETA-23/0651
DFCF-63xLL (ERCS-63xLL-0-HWH-15C)	



EDF-BAR-F-TUBE or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0

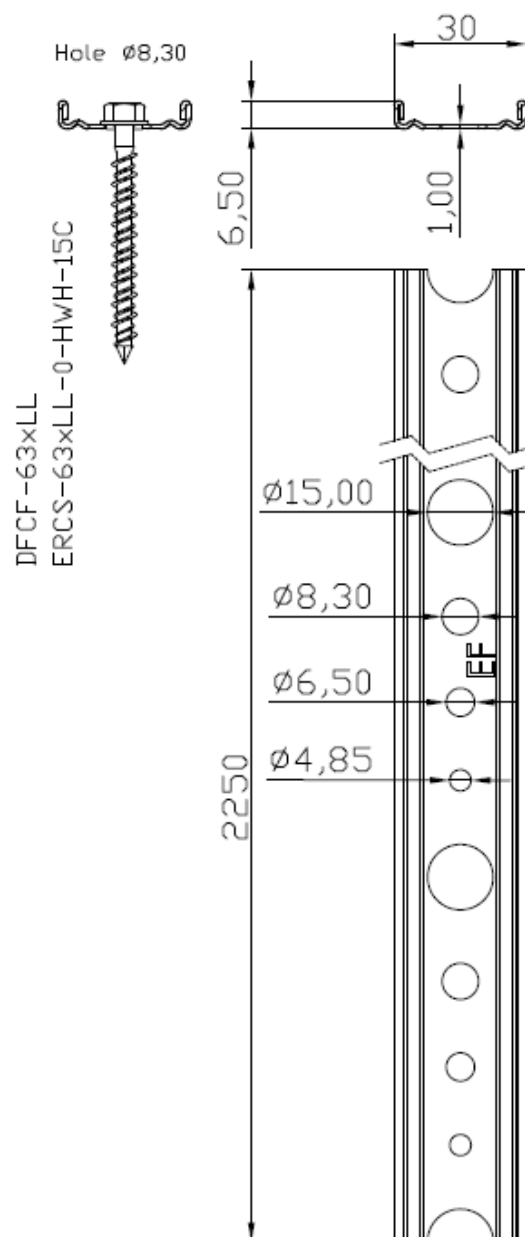


Eurofast Flat Roof Fasteners

DFCF-63xLL (ERCS-63xLL-0-HWH-15C)


Annex P.4
of European
Technical Assessment
ETA-23/0651

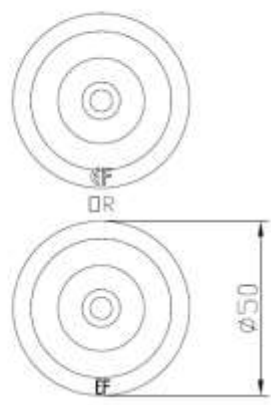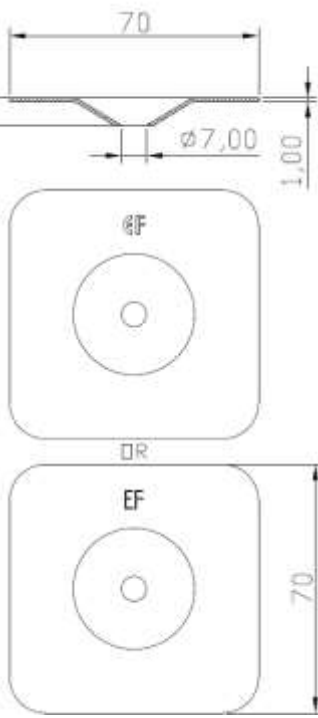DVP-EF-5010D or EPM-50D-6.3-1.0  DFCF-63xLL ERCS-63xLL-0-HWH-15C 	
DVP-DF-7070D or EPM-7070D-7.0-1.0  DFCF-63xLL ERCS-63xLL-0-HWH-15C 	
Eurofast Flat Roof Fasteners	Annex P.5 of European Technical Assessment ETA-23/0651
DFCF-63xLL (ERCS-63xLL-0-HWH-15C)	


DVP-EF-7007D or EPM-70D-6.0-0.7




DFCF-63xLL
ERCS-63xLL-0-HWH-15C

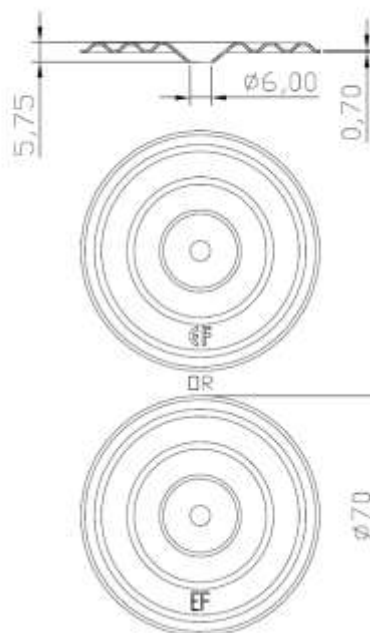

DVP-EF-7010D or EPM-70D-6.5-1.0





DFCF-63xLL
ERCS-63xLL-0-HWH-15C

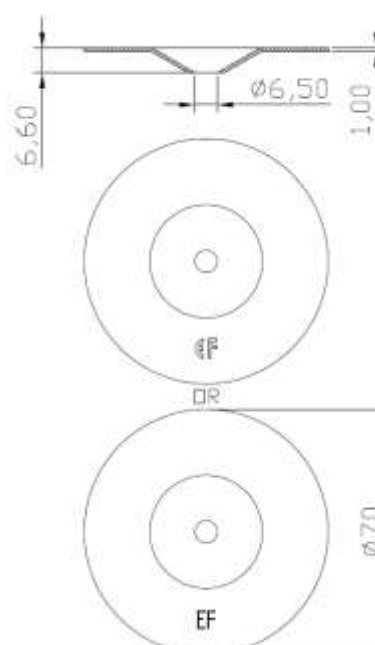

Eurofast Flat Roof Fasteners

DFCF-63xLL (ERCS-63xLL-0-HWH-15C)



Annex P.6
of European
Technical Assessment
ETA-23/0651

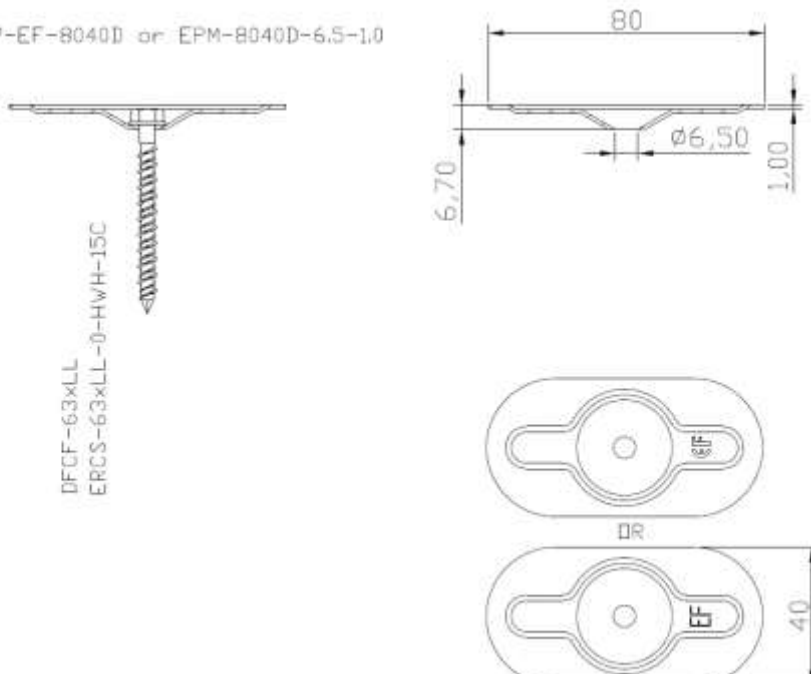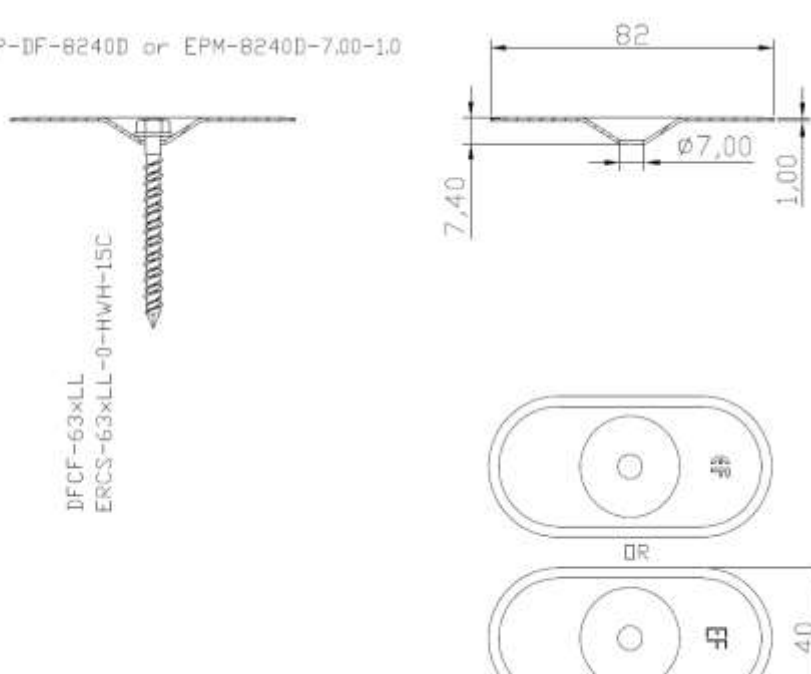DVP-EF-8040D or EPM-8040D-6.5-1,0  DFCF-63xLL ERCS-63xLL-0-HWH-15C	
DVP-DF-8240D or EPM-8240D-7,00-1,0  DFCF-63xLL ERCS-63xLL-0-HWH-15C	
Eurofast Flat Roof Fasteners	Annex P.7
DFCF-63xLL (ERCS-63xLL-0-HWH-15C)	of European Technical Assessment ETA-23/0651

DVP-DF-8240XH or EPM-8240XH-7.0-1.0



DFCF-63xLL
ERCS-63xLL-0-HWH-15C

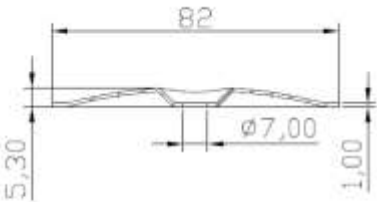


DF





ER

DVP-DFB-8240D or EPM-B-8240D-7.0-1.0



DFCF-63xLL
ERCS-63xLL-0-HWH-15C

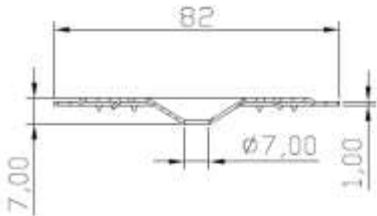


ER

Eurofast Flat Roof Fasteners

DFCF-63xLL (ERCS-63xLL-0-HWH-15C)

Annex P.8
of European
Technical Assessment
ETA-23/0651

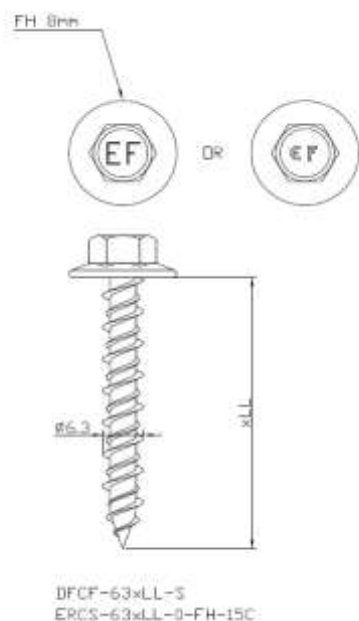

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)				
	Concrete C12/15 (drill 5,0 mm)	Concrete C20/25 (drill 5,2 mm)*	Concrete C20/25 (drill 5,5 mm)**	Concrete C25/30 (drill 5,5 mm)**
DFCF-63xLL-S (ERCS-63xLL-0-FH-15C / ERCS-63xLL-0-FH-30C)	3,76	4,85	3,67	4,02

* value also valid for holes drilled with 5,0 mm drill

** value also valid for holes drilled with 5,2 mm or 5,0 mm drill

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)		
	EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)	EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)
	EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)	-
DFCF-63xLL-S (ERCS-63xLL-0-FH-15C/ ERCS-63xLL-0-FH-30C)	5,12	5,05

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

DFCF-63xLL-S (ERCS-63xLL-0-FH-15C / ERCS-63xLL-0-FH-30C)

Annex R.1

of European
Technical Assessment
ETA-23/0651

Screw:

DFCF-63xLL-S (ERCS-63xLL-0-FH-15C / ERCS-63xLL-0-FH-30C)

Termination bar:

EDF-BAR F (ETM-2250-30-4.8-8.5-1.0)
 EDF-BAR FB (ETM-B-2250-30-4.8-8.5-1.0)
 EDF-BAR F-TUBE (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0)

Substrate:

Concrete C12/15, C20/25, C25/30 EN 206

Installation data:

Head type: Flange Head 8mm
 Effective anchoring depth h_{ef} : ≥ 25 mm
 Drill diameter in concrete C12/15: 5,0 mm
 Drill diameter in concrete C20/25: 5,2 or 5,5 mm
 Drill diameter in concrete C25/30: 5,5 mm
 Drilled hole depth: $h_{ef} + 10$ mm
 Installation force of installation tool: 15 kg + impact
 Installation tool speed: 100 rpm


Eurofast Flat Roof Fasteners

DFCF-63xLL-S (ERCS-63xLL-0-FH-15C / ERCS-63xLL-0-FH-30C)


Annex R.2

of European
 Technical Assessment
 ETA-23/0651

EDF-BAR F or
ETM-2250-30-4.8-8.5-1.0

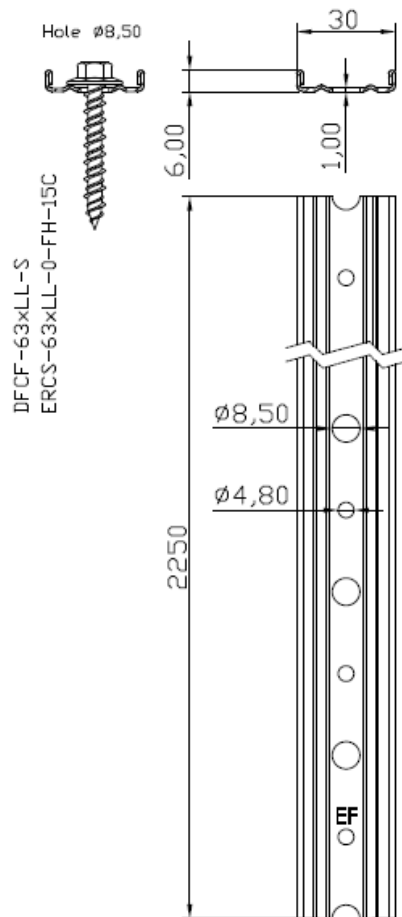

EDF-BAR FB or
ETM-B-2250-30-4.8-8.5-1.0

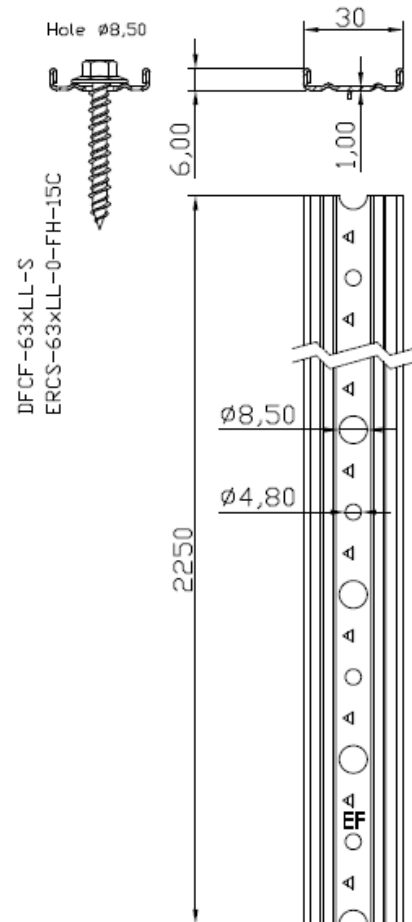


Eurofast Flat Roof Fasteners

DFCF-63xLL-S (ERCS-63xLL-0-FH-15C / ERCS-63xLL-0-FH-30C)

Annex R.3

of European
Technical Assessment
ETA-23/0651


EDF-BAR-F-TUBE or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0

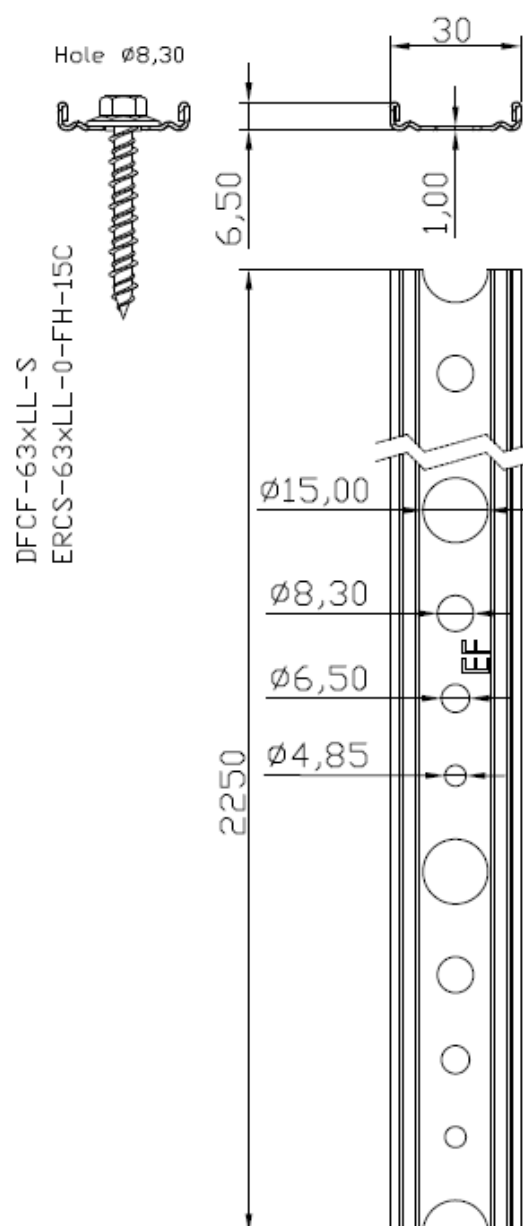

Eurofast Flat Roof Fasteners

DFCF-63xLL-S (ERCS-63xLL-0-FH-15C / ERCS-63xLL-0-FH-30C)

Annex R.4
of European
Technical Assessment
ETA-23/0651

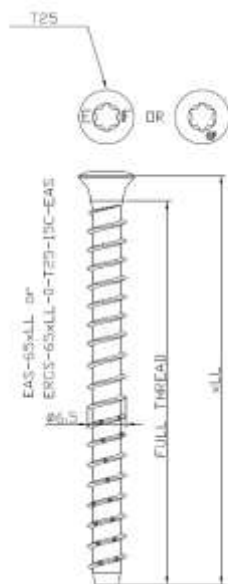

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)				
	Concrete C12/15 (drill 5,0 mm)	Concrete C20/25 (drill 5,2 mm)*	Concrete C20/25 (drill 5,5 mm)**	Concrete C25/30 (drill 5,5 mm)**
EAS-65xLL (ERCS-65xLL-0-T25-15C-EAS)	2,59	3,34	2,85	3,12

* value also valid for holes drilled with 5,0 mm drill

** value also valid for holes drilled with 5,2 mm or 5,0 mm drill

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)			
	-	TLK-45xLL (EPT-45xLL-PP)	HTLK-45xLL (EPT-O-45xLL-PP)
	TRP-45xLL (EPT-45xLL-PA)	TLK-75xLL (EPT-75xLL-PP)	-
	BTRP-45xLL (EPT-B-45xLL-PA)	DVP-DL-70N + TLK-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)	-
	TWP-8040xLL (EPT-8040xLL-PA)	-	-
	EDF-BAR F-TUBE + KMT-15xLL (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)	-	-
	DVP-KMT-8240 + KMT-15xLL (EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)	-	-
	EPM-T-IP-80-13.6-0.8 + KMT-15xLL (EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IT-80-13.6-0.8 + KMT-15xLL (EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	EPM-T-IE-80-13.6-0.8 + KMT-15xLL (EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)	-	-
	DVP-DL-70N + TRP-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)	-	-
EAS-65xLL (ERCS-65xLL-0-T25-15C-EAS)	2,50	1,74	1,77

* "Pull-over" according to CEN/TS 17659:2021

Eurofast Flat Roof Fasteners

EAS-65xLL (ERCS-65xLL-0-T25-15C-EAS)

Annex S.1

of European
Technical Assessment
ETA-23/0651

Screw:

EAS-65xLL (ERCS-65xLL-0-T25-15C-EAS)

Metal pressure plate:

DVP-KMT-8240 + KMT-15xLL (EPM-T-8240N-13.6-1.0 + EPT-15xLL-PA)
 EPM-T-IP-80-13.6-0.8 + KMT-15xLL (EPM-T-IP-80-13.6-0.8 + EPT-15xLL-PA)
 EPM-T-IT-80-13.6-0.8 + KMT-15xLL (EPM-T-IT-80-13.6-0.8 + EPT-15xLL-PA)
 EPM-T-IE-80-13.6-0.8 + KMT-15xLL (EPM-T-IE-80-13.6-0.8 + EPT-15xLL-PA)
 DVP-DL-70N + TRP-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PA)
 DVP-DL-70N + TLK-45xLL (EPM-EDL-70N-20-0.5 + EPT-45xLL-PP)

Pressure plate with tube:

TRP-45xLL (EPT-45xLL-PA)
 BTRP-45xLL (EPT-B-45xLL-PA)
 TWP-8040xLL (EPT-8040xLL-PA)
 TLK-45xLL (EPT-45xLL-PP)
 HTLK-45xLL (EPT-O-45xLL-PP)
 TLK-75xLL (EPT-75xLL-PP)

Termination bar:

EDF-BAR F-TUBE + KMT-15xLL (ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0 + EPT-15xLL-PA)

Substrate:

Concrete C12/15, C20/25, C25/30 - EN 206

Installation data:


Head type: Raised Bugle Head
 Recess: TX25
 Effective anchoring depth h_{ef} : ≥ 25 mm
 Drill diameter in concrete C12/15: 5,0 mm
 Drill diameter in concrete C20/25: 5,2 or 5,5 mm
 Drill diameter in concrete C25/30: 5,5 mm
 Drilled hole depth: $h_{ef} + 10$ mm
 Installation force of installation tool: 15 kg + impact
 Installation tool speed: 100 rpm

Eurofast Flat Roof Fasteners

EAS-65xLL (ERCS-65xLL-0-T25-15C-EAS)

Annex S.2

of European
 Technical Assessment
 ETA-23/0651




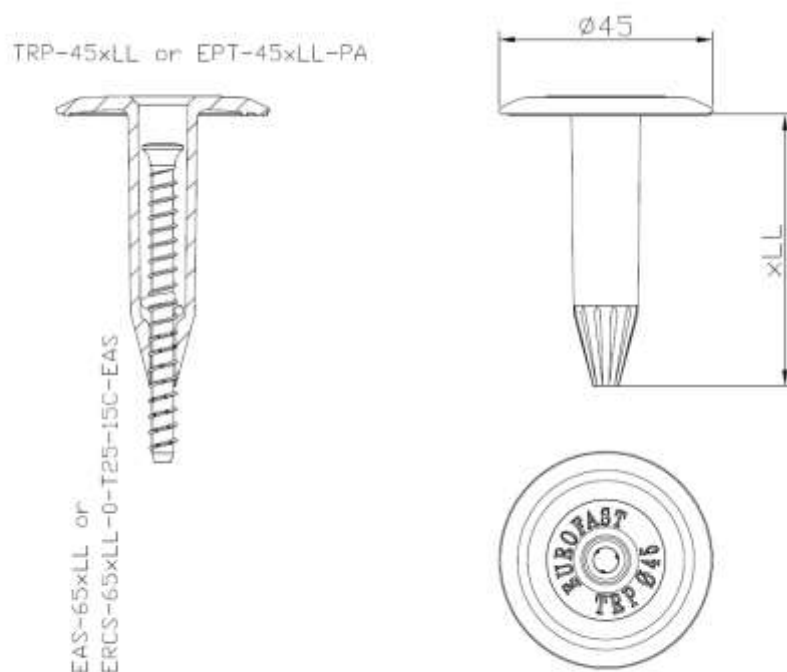


Eurofast Flat Roof Fasteners


EAS-65xLL (ERCS-65xLL-0-T25-15C-EAS)

Annex S.3

of European
Technical Assessment
ETA-23/0651

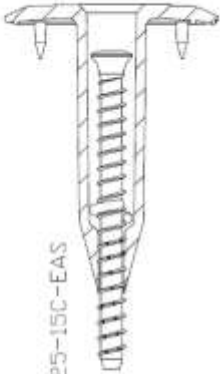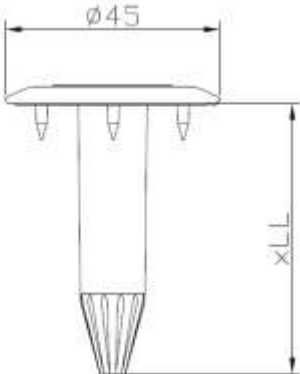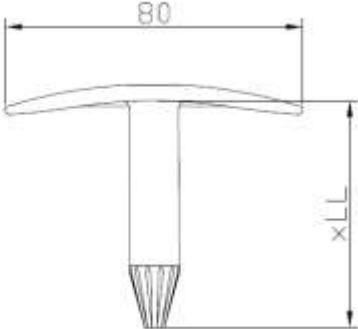TRP-45xLL or EPT-45xLL-PA  EAS-65xLL or ERCS-65xLL-0-T25-15C-EAS  ø45 xLL  EUROFAST TRP ø45	
TWP-8040xLL or EPT-8040xLL-PA  EAS-65xLL or ERCS-65xLL-0-T25-15C-EAS  80 xLL  40 EUROFAST TWP 8040	
Eurofast Flat Roof Fasteners	Annex S.4 of European Technical Assessment ETA-23/0651
EAS-65xLL (ERCS-65xLL-0-T25-15C-EAS)	

EDF-BAR-F-TUBE + KMT-15xLL or
ETM-T-2250-30-4.85-6.5-8.3-15.0-1.0
+ EPT-15xLL-PA





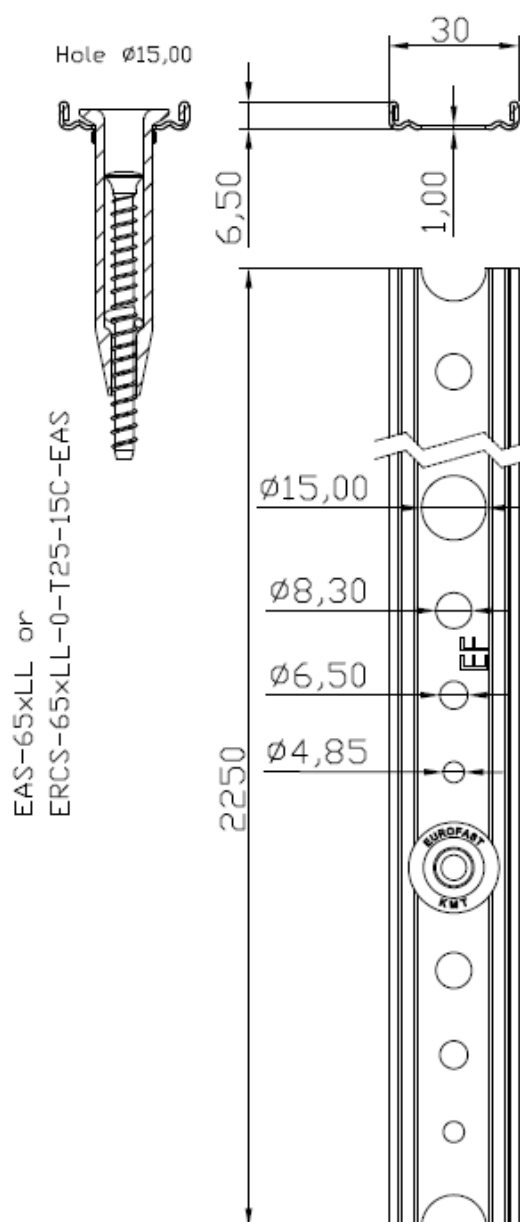






Eurofast Flat Roof Fasteners

EAS-65xLL (ERCS-65xLL-0-T25-15C-EAS)

Annex S.5


of European
Technical Assessment
ETA-23/0651

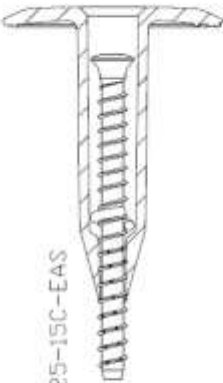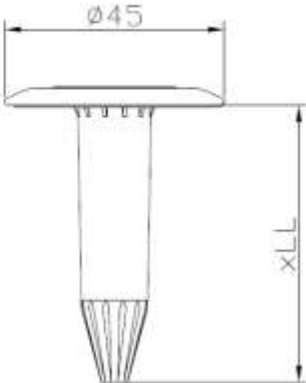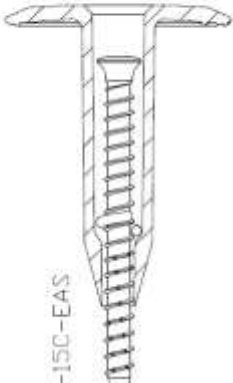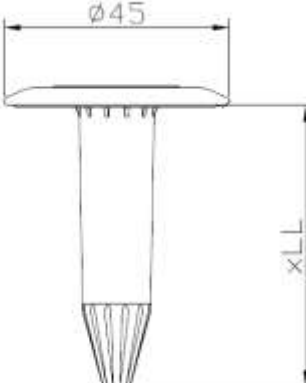TLK-45xLL or EPT-45xLL-PP  EAS-65xLL or ERCS-65xLL-0-T25-15C-EAS  Ø45 xLL 	
HTLK-45xLL or EPT-D-45xLL-PP  EAS-65xLL or ERCS-65xLL-0-T25-15C-EAS  Ø45 xLL  Ø6,60	
Eurofast Flat Roof Fasteners	Annex S.6 of European Technical Assessment ETA-23/0651
EAS-65xLL (ERCS-65xLL-0-T25-15C-EAS)	

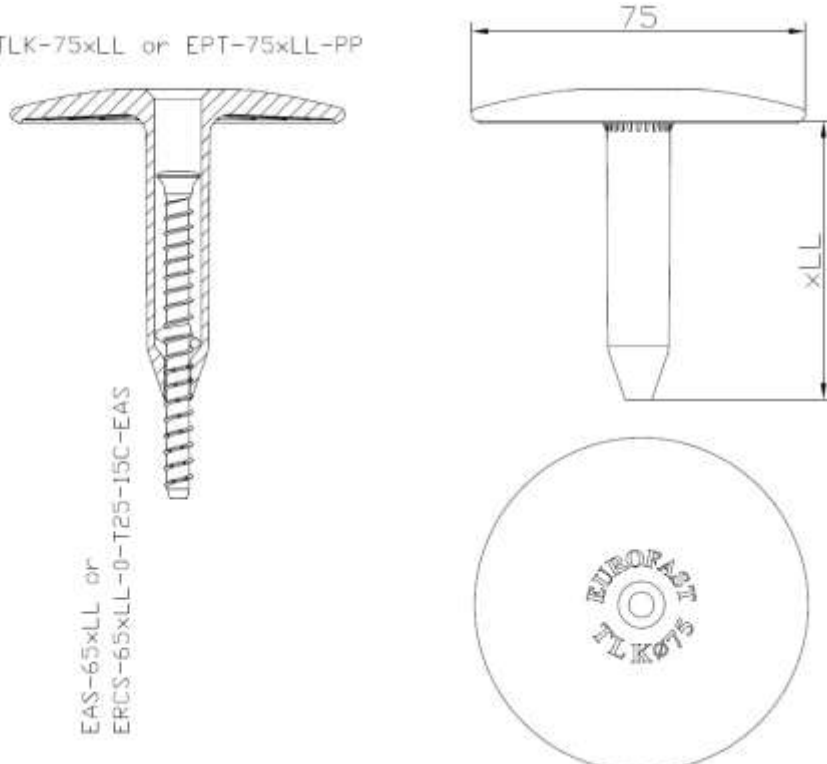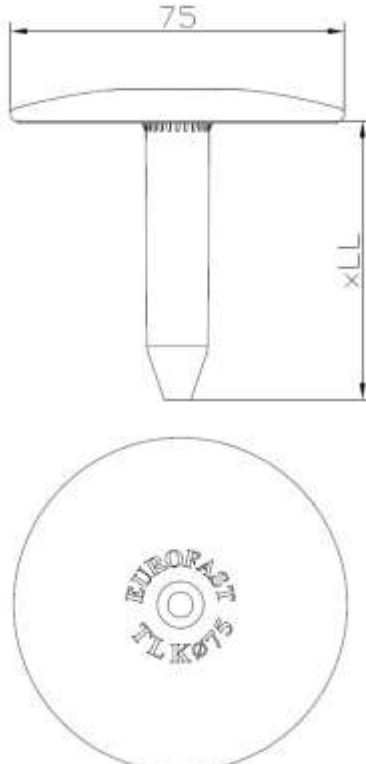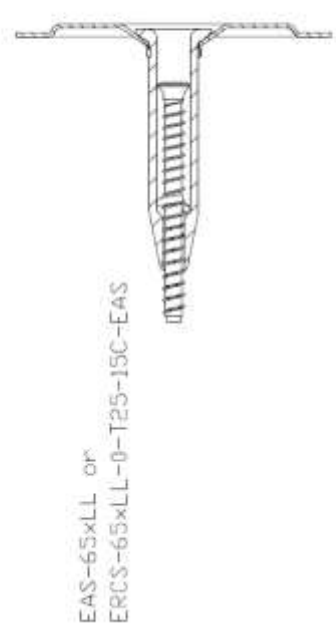
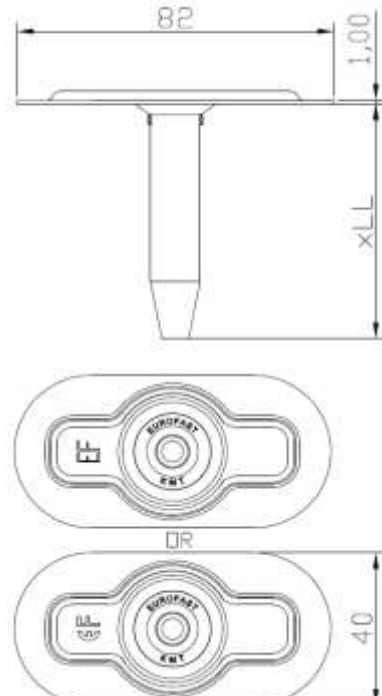
TLK-75xLL or EPT-75xLL-PP  EAS-65xLL or ERCS-65xLL-0-T25-15C-EAS	
DVP-KMT-8240 + KMT-15xLL or EPM-T-8240N-13,6-1,0 + EPT-15xLL-PA  EAS-65xLL or ERCS-65xLL-0-T25-15C-EAS	
Eurofast Flat Roof Fasteners	Annex S.7 of European Technical Assessment ETA-23/0651

EAS-65xLL (ERCS-65xLL-0-T25-15C-EAS)


EPM-T-IP-80-13,6-0,8 + KMT-15xLL or
EPM-T-IP-80-13,6-0,8 + EPT-15xLL-PA





EAS-65xLL or
ERCS-65xLL-0-T25-15C-EAS

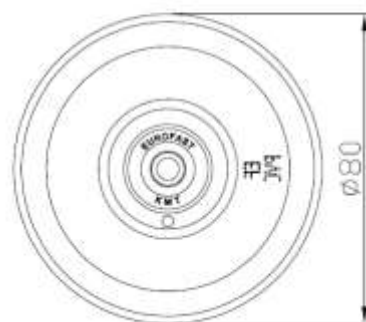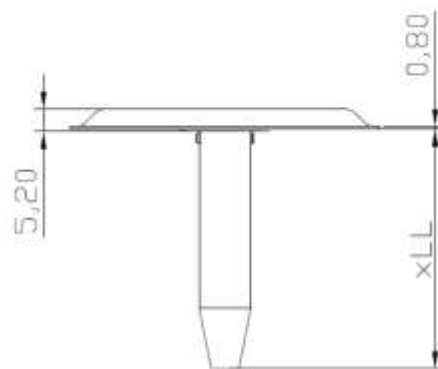

EPM-T-IT-80-13,6-0,8 + KMT-15xLL or
EPM-T-IT-80-13,6-0,8 + EPT-15xLL-PA



EAS-65xLL or
ERCS-65xLL-0-T25-15C-EAS

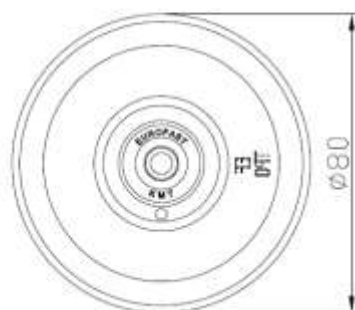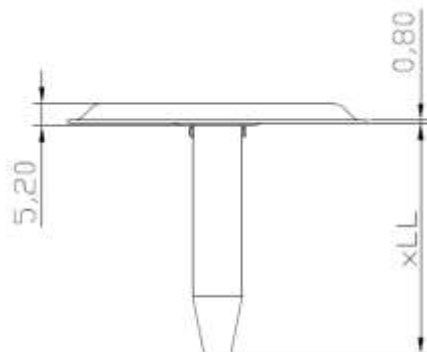


Eurofast Flat Roof Fasteners

EAS-65xLL (ERCS-65xLL-0-T25-15C-EAS)



Annex S.8

of European
Technical Assessment
ETA-23/0651


EPM-T-1E-80-13.6-0.8 + KMT-15xLL or
EPM-T-1E-80-13.6-0.8 + EPT-15xLL-PA




EAS-65xLL or
ERCS-65xLL-0-T25-15C-EAS

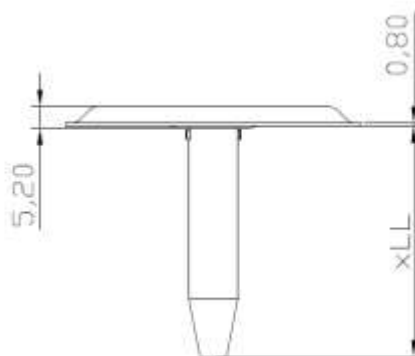

DVP-DL-70N + TLK-45xLL or
EPM-EDL-70N-20-0.5 + EPT-45xLL-PP



EAS-65xLL or
ERCS-65xLL-0-T25-15C-EAS

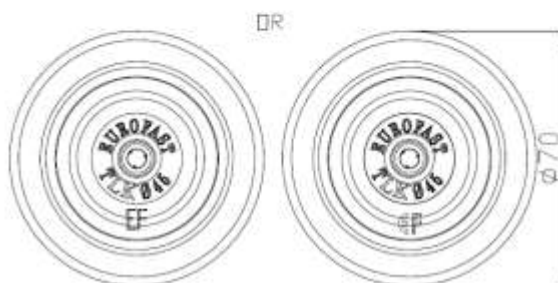


Eurofast Flat Roof Fasteners

EAS-65xLL (ERCS-65xLL-0-T25-15C-EAS)


Annex S.9

of European
Technical Assessment
ETA-23/0651

DVP-DL-70N + TRP-45xLL or
EPM-EDL-70N-20-0.5 + EPT-45xLL-PA




EAS-65xLL or
ERCS-65xLL-0-T25-15C-EAS

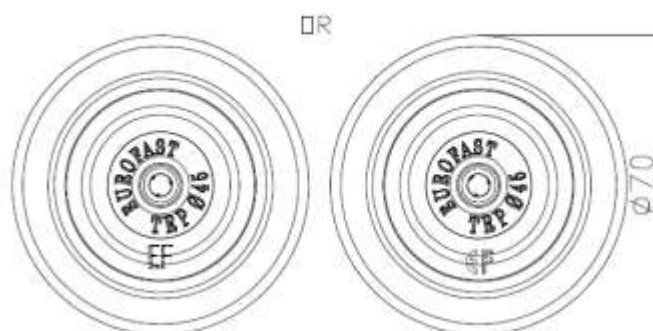

Eurofast Flat Roof Fasteners

EAS-65xLL (ERCS-65xLL-0-T25-15C-EAS)

Annex S.10
of European
Technical Assessment
ETA-23/0651

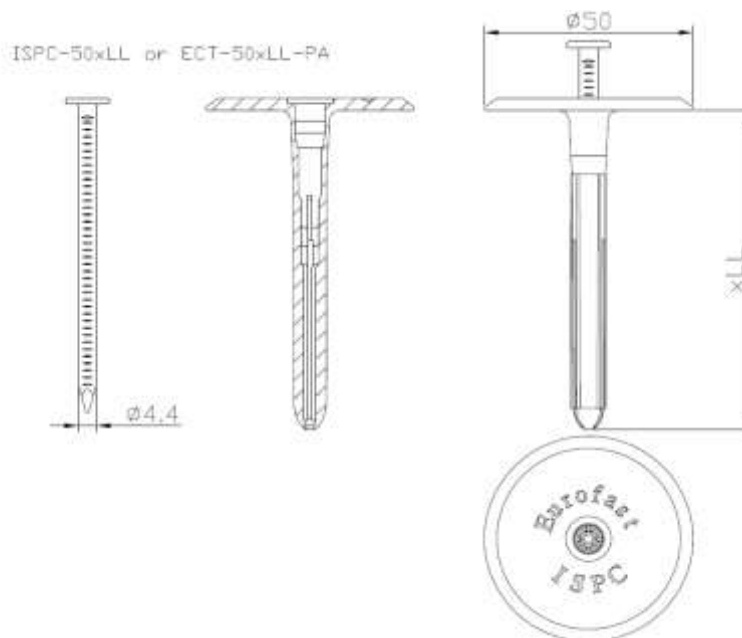

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)			
	Concrete C12/15 (drill 8,0 mm)	Concrete C20/25 (drill 8,0 mm)	Concrete C25/30 (drill 8,0 mm)
ISPC-50xLL (ECT-50xLL-PA)	2,02	2,61	2,85

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)	
	DVP-ISPC 70N (EPM-ECT-70N-12.0-0.5)
ISPC-50xLL (ECT-50xLL-PA)	3,15

* "Pull-over" according to CEN/TS 17659:2021


Screw:			
ISPC-50xLL	(ECT-50xLL-PA)		
Metal pressure plate:			
DVP-ISPC 70N	(EPM-ECT-70N-12.0-0.5)		
Substrate:			
Concrete	C12/15, C20/25, C25/30	EN 206	
Installation data:			
Effective anchoring depth h_{ef} :	≥ 25 mm		
Drill diameter:	8,0 mm		
Drilled hole depth in concrete:	$h_{ef} + 15$ mm		
Installation tool:	hammer		

Eurofast Flat Roof Fasteners

ISPC-50xLL (ECT-50xLL-PA)


Annex T.1

of European
Technical Assessment
ETA-23/0651

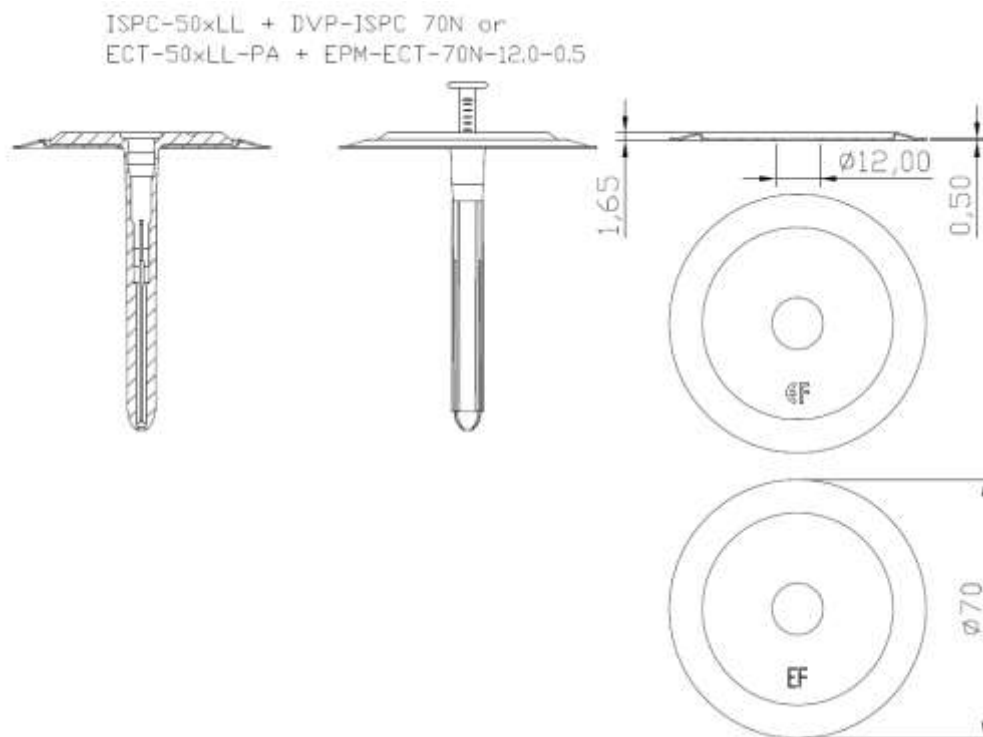**Eurofast Flat Roof Fasteners**

ISPC-50xLL (ECT-50xLL-PA)

Annex T.2
of European
Technical Assessment
ETA-23/0651

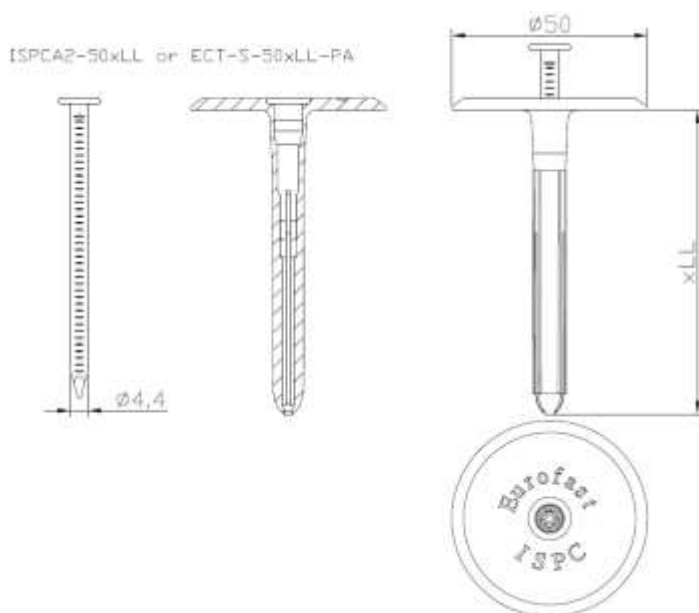

Characteristic Values of Axial Pull-Out Resistance [kN] (according to Fig. 3 of EAD 030351-00-0402)			
	Concrete C12/15 (drill 8,0 mm)	Concrete C20/25 (drill 8,0 mm)	Concrete C25/30 (drill 8,0 mm)
ISPCA2-50xLL (ECT-S-50xLL-PA)	2,02	2,61	2,85

Characteristic Values of Axial Pull-Through* Resistance [kN] (according to Fig. 4 and 5 of EAD 030351-00-0402)	
	DVP-ISPC 70N (EPM-ECT-70N-12.0-0.5)
ISPCA2-50xLL (ECT-S-50xLL-PA)	3,15


* "Pull-over" according to CEN/TS 17659:2021

Screw:			
ISPCA2-50xLL	(ECT-S-50xLL-PA)		
Metal pressure plate:			
DVP-ISPC 70N	(EPM-ECT-70N-12.0-0.5)		
Substrate:			
Concrete	C12/15, C20/25, C25/30	EN 206	
Installation data:			
Effective anchoring depth h_{ef} :	≥ 25 mm		
Drill diameter:	8,0 mm		
Drilled hole depth:	$h_{ef} + 15$ mm		
Installation tool:	hammer		

Eurofast Flat Roof Fasteners

ISPCA2-50xLL (ECT-S-50xLL-PA)


Annex U.1
of European
Technical Assessment
ETA-23/0651

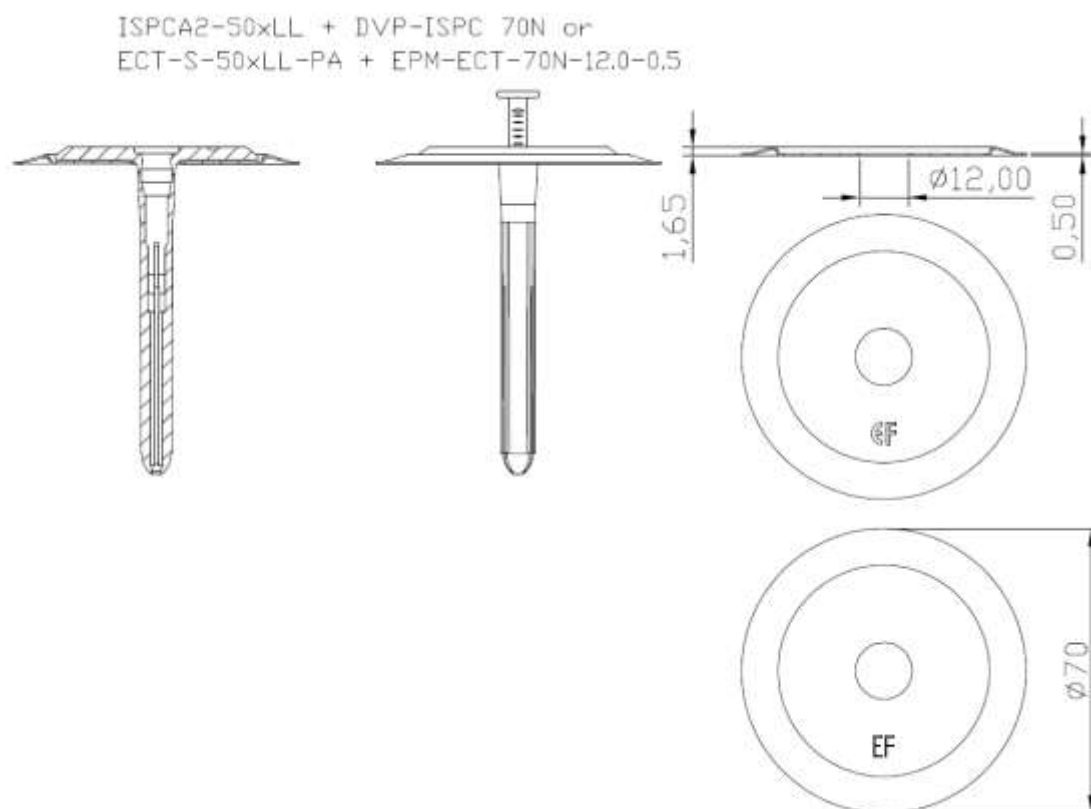

Eurofast Flat Roof Fasteners

ISPCA2-50xLL (ECT-S-50xLL-PA)

Annex U.2
of European
Technical Assessment
ETA-23/0651

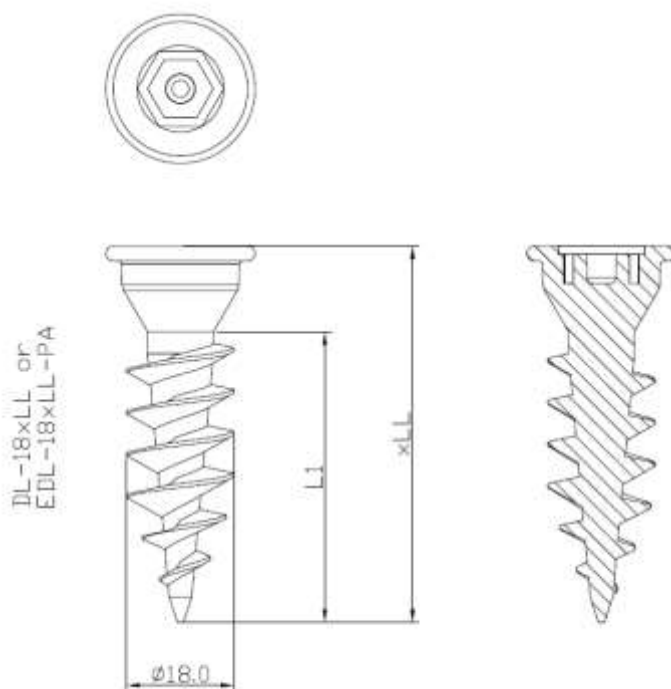

Characteristic Values of Axial Pull-Out Resistance [kN] (acc. to Fig. 3 of EAD 030351-00-0402)	
	Wood wool panel
DL-18xLL (EDL-18xLL-PA)	0.25

Characteristic Values of Axial Pull-Through* Resistance [kN] (acc. to Fig. 4 and 5 of EAD 030351-00-0402)	
	DVP-DL-50N (EPM-EDL-50N-20-0.5)
	DVP-DL-70N (EPM-EDL-70N-20-0.5)
DL-18xLL (EDL-18xLL-PA)	1,83

* "Pull-over" acc. to CEN/TS 17659:2021


Screw:		
DL-18xLL	(EDL-18xLL-PA)	
Pressure plate metal:		
DVP-DL-50N	(EPM-EDL-50N-20-0.5)	
DVP-DL-70N	(EPM-EDL-70N-20-0.5)	
Substrate:		
Wood wool panel		EN 13168
Installation data		
Effective anchoring depth h_{ef} :		≥ 25 mm

Eurofast Flat Roof Fasteners


DL-18xLL (EDL-18xLL-PA)

Annex W.1
of European
Technical Assessment
ETA-23/0651

DVP-DL-50N or
EPM-EDL-50N-20-0.5




DL-18xLL or
EDL-18xLL-PA

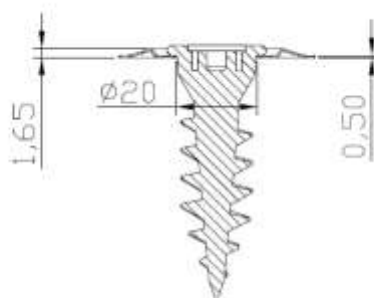


DR




DVP-DL-70N or
EPM-EDL-70N-20-0.5



DL-18xLL or
EDL-18xLL-PA



DR



Eurofast Flat Roof Fasteners

DL-18xLL (EDL-18xLL-PA)

Annex W.2
of European
Technical Assessment
ETA-23/0651